

Refrigeration

Product catalogue 2018



A woman with curly hair, wearing a blue cardigan and jeans, is crouching next to a large glass display case in a store. She is looking at the products inside the case. The case is filled with various items, and the background shows other display cases and shelves in the store.

Daikin is a strong challenger in the refrigeration market. We can create the ideal solution for each customer's specific situation. As our products contain the latest technologies we ensure the highest energy efficiency. Our Daikin branded units are rigorously tested in order to provide you reliable operation. With the acquisition of Zanotti group, we expand our refrigeration business providing a larger and more diverse product line for all aspects in the cold chain.

Refrigeration

Why choose Daikin?	4		
Daikin Quality Philosophy	8		
Eco-Design regulation	10		
F-Gas regulation	12		
Tools & Platforms	14		
1 Plug and Play solutions for cold rooms and Wine rooms	20	3 Packs and Racks	58
Uniblocks	23	Multi compressor Racks	59
Bi-Blocks	26	Racks	64
Wine blocks	29		
2 Condensing units	32	4 Integrated Solutions - Refrigeration with Climatization	70
Small CU	36	Conveni-Pack + Booster	72
Twin CU	41	Mix condensing units	78
Large CU	42		
Booster CU	55	5 Other products	80
		6 Options	88
		ZEAS and Conveni-Pack	88
		Zanotti	90



Inverter technology



Scroll compressor



Screw compressor



Reciprocating compressor



Swing compressor




Why choose Daikin?

We know refrigeration inside out


- We have over 100 years of experience in the Refrigeration business.
- We can meet all refrigeration needs from farm to fork, thanks to our wide range of refrigeration products.
- Innovative and Reliable own technology and expertise on Refrigerants, controls and compressors!
- Your advisor for solutions to meet your needs in line with legislation (F-gas regulation, ecodesign,...) and with focus on reliability, safety, Total Equivalent Warming impact (see page 7) and running cost.

Controlled temperatures throughout the whole supply chain

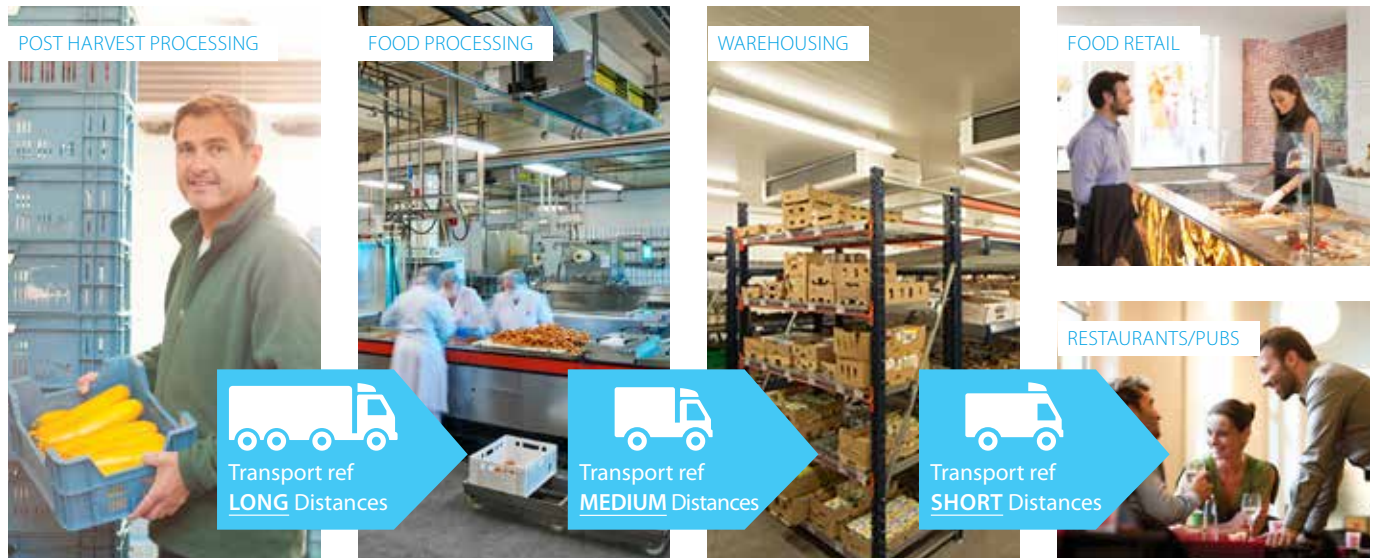

We can meet all refrigeration needs from farm to fork

Our extended product line-up is able to provide solutions for:

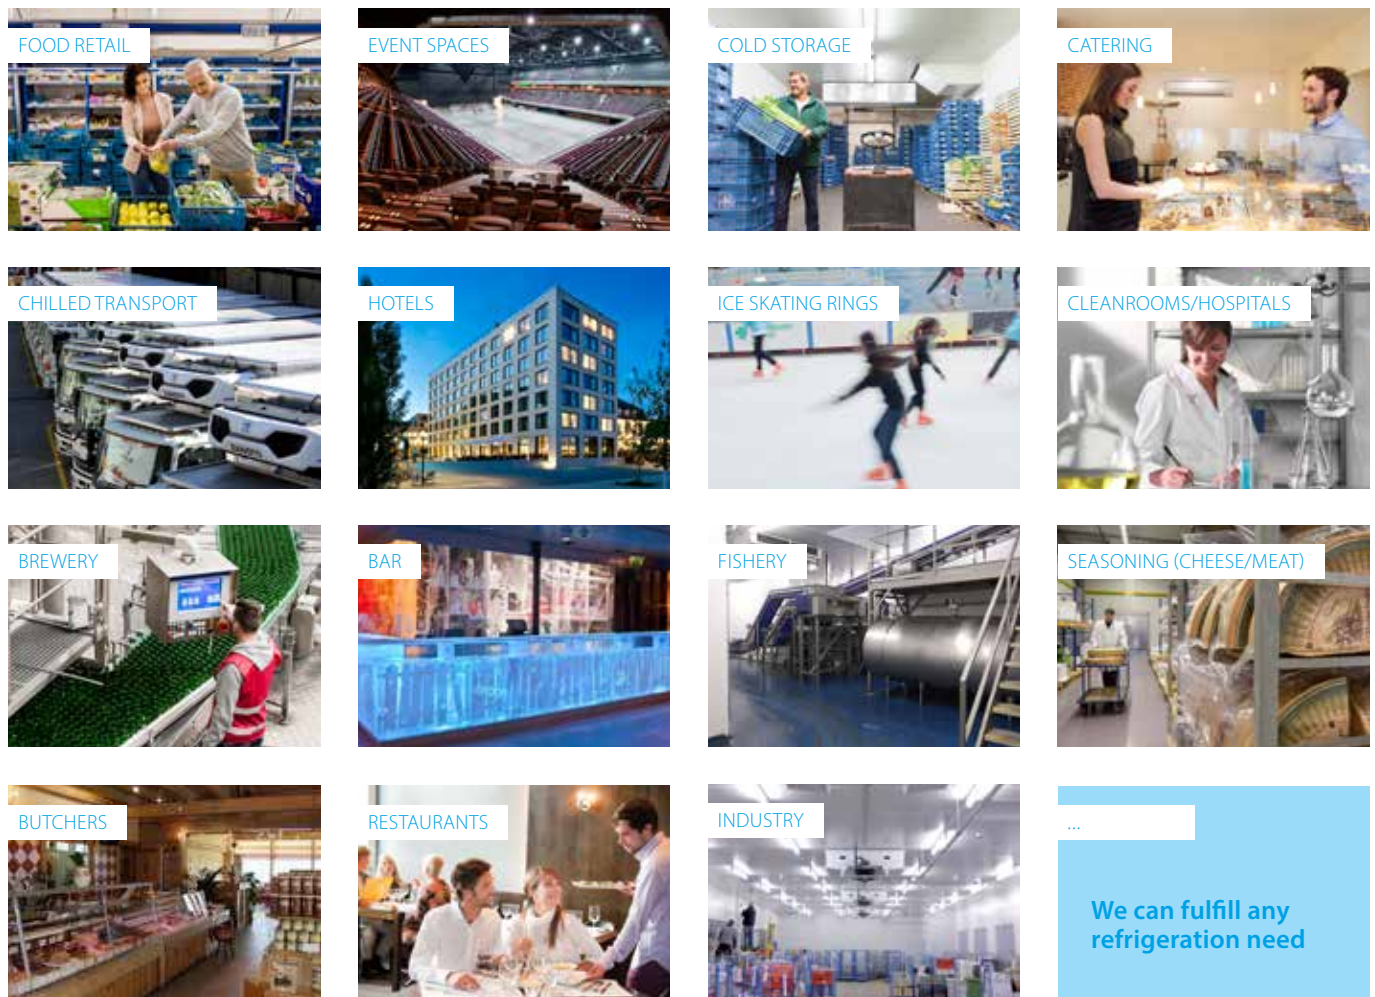

Daikin Refrigeration – United in cold



Hubbard Products Ltd., is one of the UK's leading designers, manufacturers and suppliers of commercial cooling equipment and has earned an enviable Global reputation for innovation and design-led excellence.



Daikin Chemicals

Daikin Chemicals is one of the world's foremost manufacturer of fluorochemical products and is a leading expert in that field. We strive to find new possibilities for living and industry by making the most of fluorine characteristics using our own exclusively developed technologies.



Daikin Europe N.V. is a major European producer of air conditioners, heating systems and refrigeration equipment, with approximately 5,500 employees throughout Europe and major manufacturing facilities based in Belgium, the Czech Republic, Germany, Italy, Turkey and the UK. Globally, Daikin is renowned for its pioneering approach to product development and the unrivalled quality and versatility of its integrated solutions.



Tewis is a leading company in the design and engineering of refrigeration systems. Along with their expertise in customising controls (including monitoring), Tewis offers total comprehensive solutions for Refrigeration and Climate applications. Over the last few years, Tewis has focused on developing a range of CO₂ based refrigeration systems and has established a long-lasting relationship with key Spanish and Portuguese food retailers. Its mission and philosophy to date has been to achieve high reliability and realise remarkable energy savings for their customer base.



Zanotti is a refrigeration specialist founded in 1962. With over 50 years of experience in food storing services covering the needs of commercial and industrial refrigeration, but also the needs of the transportation of fresh and frozen products. Zanotti changed the refrigeration world from the early days with the introduction of the Uniblock, an all in one plug and play refrigeration unit for cold rooms. Today they employ more than 600 people, with three production facilities and an annual turnover of approx 130 million Euro.




Meeting customer needs!

Depending on type of application, location and customers interest/values, the optimal refrigeration solution for the customer can potentially be different! **Thanks to our wide product portfolio, Daikin can offer what a customer really needs!**

The DNA of our Advice is:

✓ **Safety and Reliability**

✓ **Reducing the Total Equivalent Warming Impact (TEWI)**

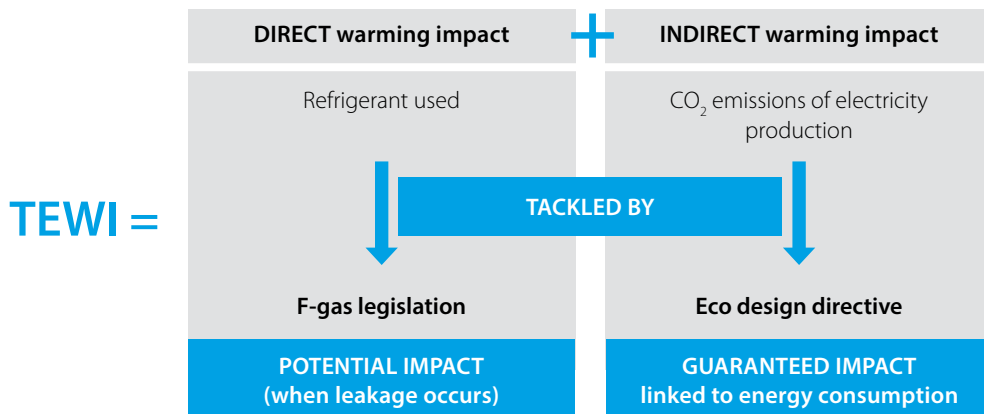

Reduction of CO₂ emissions is one of the main priorities for the future. A refrigeration plant's global warming effect is the combination of the possible refrigerant losses (Direct warming impact) and the CO₂ emissions caused by electricity production (Indirect warming impact). Country per country situation is different, however on average in Europe CO₂ release at energy production is quite high (average 0,45kg/kwh of Electrical Energy)! Due to this, there is a significant greenhouse effect over the lifetime of the refrigeration plant and efficiency is thus one of the crucial focus points in reducing TEWI!

When various refrigeration solutions are being compared it is thus important to take into account both aspects as in some cases optimizing the direct warming impact (eg: changing refrigerant) will have an opposite effect on the indirect warming impact!

✓ **Reducing your running cost**

Through focus on reliability & quality, through extensive testing on each product, and energy efficiency our aim is to reduce your operational cost to the absolute minimum!





Daikin's Quality Philosophy

Each and every Daikin branded unit has already run in factory, avoiding dead on arrival.

Daikin is committed to providing the most efficient and safe solutions to meet all of your refrigeration needs, today and in the future.

We are aware of our responsibility to protect the environment and our policies and practices keep environmental sustainability at the heart of everything we do. We conduct our business in accordance with green principles, because it makes economical as well as ecological sense.

Daikin Europe N.V. continually adapts its environmental policy to the changing global, European and local legislative frameworks. It stimulates and promotes the strict application of all relevant legislation and formulates recommendations to facilitate implementation.

Tests during development and during production, to evaluate the performance of our products so that they meet the envisioned capacities, energy efficiency and reliability, is the foundation of our quality philosophy!


Each and every Daikin branded unit leaving production line has been rigorously tested from design stage (eg: vibration test) up to final production (each and every unit has a leakage test, electrical test and a running test)! As units can be exposed to severe weather conditions during the lifetime of the equipment, they are foreseen with anti-corrosion treatments and resistant casing to ensure a long life!



See how transportation is simulated and vibrations are tested on our shaker (search: vibration ZEAS)

You Tube



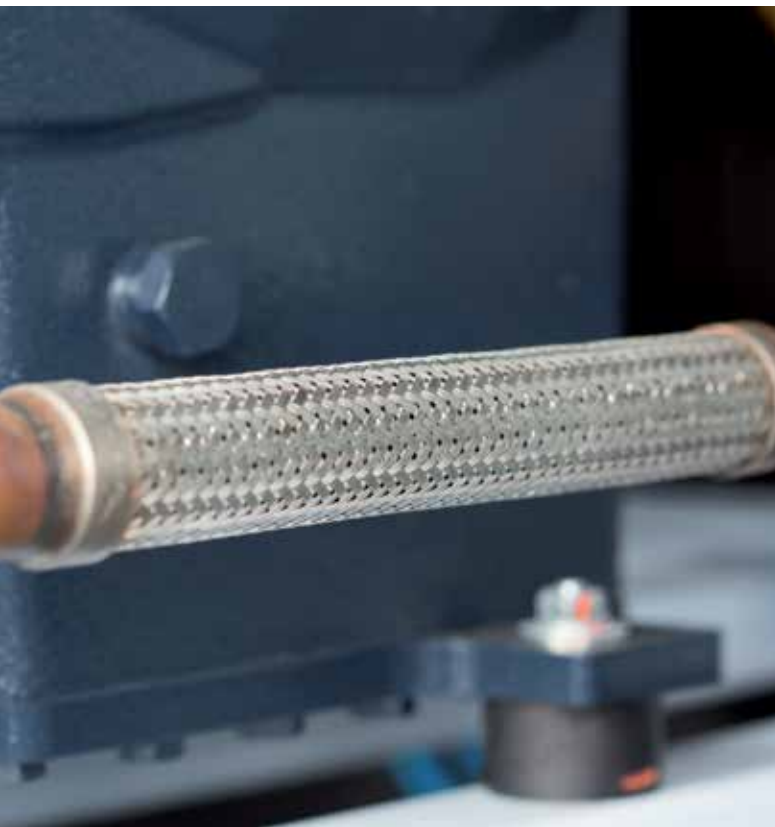

Vibration damper assembly



Logical, orderly and „tidy“ installation in the control cabinet

Our newest members of the group, Zanotti, Tewis and Hubbard, already have a long experience on the market meeting high quality standards. Gradually, Daikin's long life experience echoes into Zanotti, Tewis and Hubbard products



Everything cleanly processed with high quality



Easily accessible and clearly laid out compound machines





Acting ahead of legislation

Ecodesign Directive - Energy related products

The EU's Ecodesign Directive 2009/125/EC is designed to encourage the market to use more efficient products. It also helps manufacturers to agree a better definition of efficiency for remote condensing units. Since 01/07/2016 refrigeration units also need to comply with this system of minimum efficiency requirements.

In catalogues the seasonal data will be marked with the seasonal flower.



Find more information about the seasonal data in refrigeration on our website: www.daikin.eu or on the Business Portal my.daikin.eu

EN 13215: Definition of the nominal operating conditions (capacity, COP and power consumption)

Temperature application	Medium	Low
Ambient temperature	32°C	32°C
Evaporation temperature	-10°C	-35°C
Suction gas side	10 K superheat OR 20°C suction gas temperature	
Subcooling degree of the liquid	Depending on the condenser coil used in the refrigeration system	

To define the efficiency of a condensing unit the Ecodesign Directive used the EN13215 regulation. Both methodologies are allowed to define delivered cooling capacity and efficiency of a unit.

→ This has also an impact on the SEPR AND COP value.

Two methodologies to evaluate the unit performance

Low capacities

Condensing unit installed indoor

COP methodology:

- › If the medium temperature cooling capacity is lower than 5 kW and low temperature cooling capacity is lower than 2 kW
- › COP given on 25°C ambient temperature
- › COP given on 32°C ambient temperature
- › COP given on 43°C: mandatory if ambient temperature design is higher or equal to 35°C

Minimum efficiency (COP):

- › Medium temperature:
Capacity lower or equal 1 kW = 1.2
Capacity lower or equal 5 kW = 1.4
- › Low temperature:
Capacity lower or equal 1 kW = 0.75
Capacity lower or equal 2 kW = 0.85

Higher capacities

Condensing unit installed outdoors
(climate depending)

SEPR methodology:

- › If the medium temperature cooling capacity is between 5kW and 50kW and low temperature cooling capacity is between 2kW and 20kW
- › SEPR given on the reference climate zone of Strasbourg
- › COP given on 43°C: mandatory if ambient temperature design is higher or equal to 35°C

Minimum efficiency (SEPR):

- › Medium temperature:
Capacity lower or equal 20 kW = 2.25
Capacity lower or equal 50 kW = 2.35
- › Low temperature:
Capacity lower or equal 8 kW = 1.5
Capacity lower or equal 20 kW = 1.6

Refrigeration product portfolio and Ecodesign Directive


Type	MONOBLOCKS BIBLOCKS WINEBLOCKS	JEHCCU	JEHSCU	CONDENSING UNITS	TWIN CONDENSING UNITS	INVERTER CONDENSING UNITS
				CU 	CU-T 	CI 
Medium temperature (Te = -10°C)	In scope*	In scope	In scope	In scope ⁽⁴⁾	In scope ⁽⁴⁾	In scope ⁽⁴⁾
Low temperature (Te = -35°C)	In scope*	In scope	In scope	In scope ⁽⁴⁾	In scope ⁽⁴⁾	In scope ⁽⁴⁾

Type	ZEAS	MULTI ZEAS	CONVENI-PACK	MULTI COMPRESSORS CONDENSING UNITS	OTHER RANGES		
				CM / CL 	Refrigerating Capacity <20kw	Refrigerating Capacity <50kw	Refrigerating Capacity >50kW
Medium temperature (Te = -10°C)	In scope	Out of scope ⁽¹⁾	Out of scope ⁽²⁾	In scope ⁽⁴⁾	In scope	In scope	Out of scope
Low temperature (Te = -35°C)	In scope	Out of scope ⁽¹⁾	-	In scope ⁽⁴⁾	In scope	Out of scope	Out of scope


- (1) Delivered capacity of the multi Zeas units in medium and low temperature application are higher than the upper boundary (MT: Q > 50 kW; LT: Q > 20 kW) mentioned in the Ecodesign Directive
- (2) The CVP can only operate when also Daikin indoor units are connected. This means that the CVP can be seen as a condensing unit with multiple condensers which is considered out of scope of the Ecodesign Directive ENTR LOT1
- (3) The booster unit is not seen as a condensing unit, because the heat extracted from the evaporator side is (LT -side) discharge in the MT refrigerant line of a CVP or Zeas unit and not to the surrounding air as described in the Ecodesign Directive ENTR LOT1
- (4) Only the models which the delivered refrigeration capacity is within the capacity range defined in the Ecodesign directive (LT < 20 kW, MT < 50 kW)

Acting ahead of legislation



What does the F-Gas regulation mean?

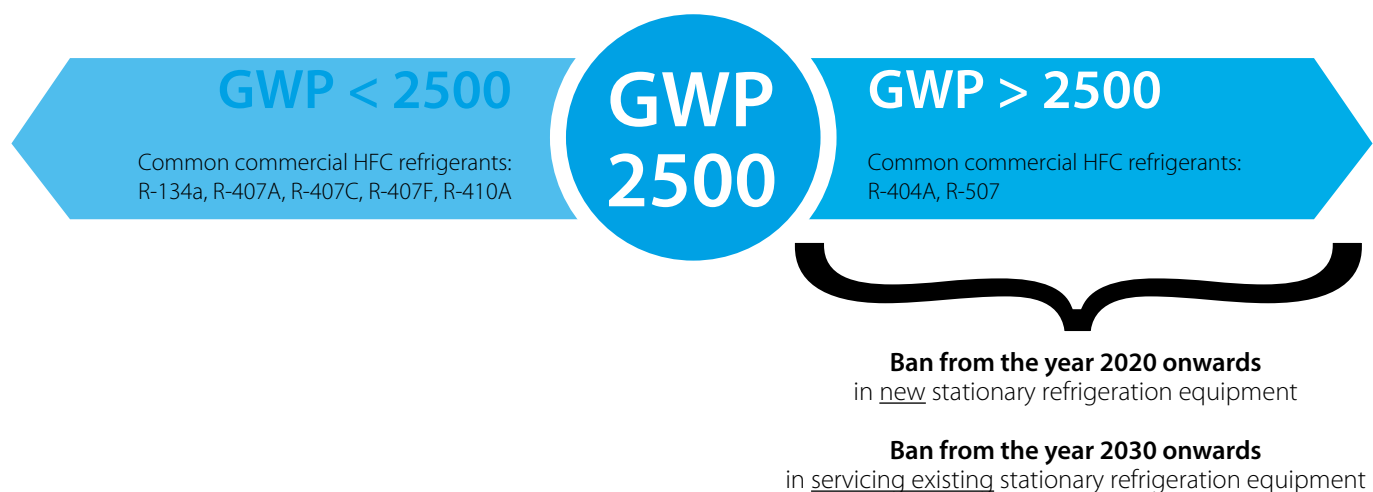


F-Gas Regulation

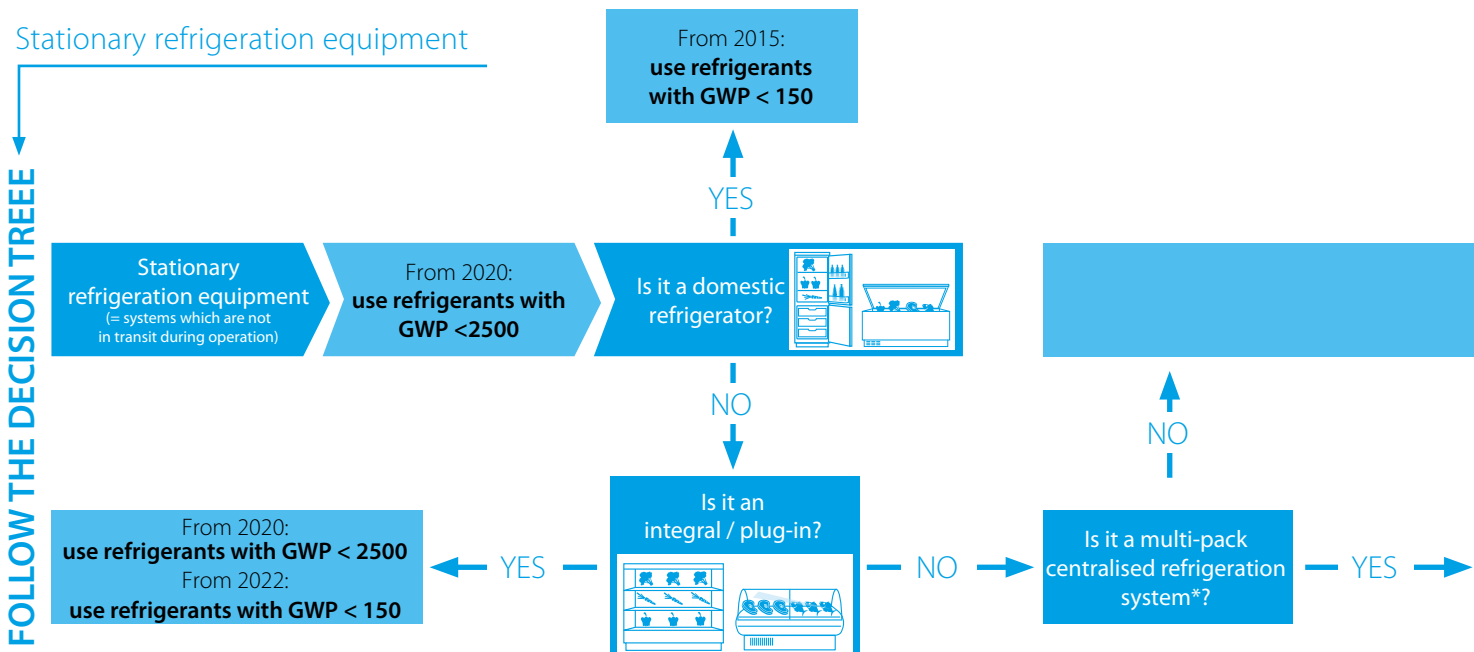


*"Multipack centralised refrigeration systems" = Systems with two or more compressors operated in parallel, which are connected to one or more common condensers and to a number of cooling devices such as display cases, cabinets, freezers or to chilled store rooms.

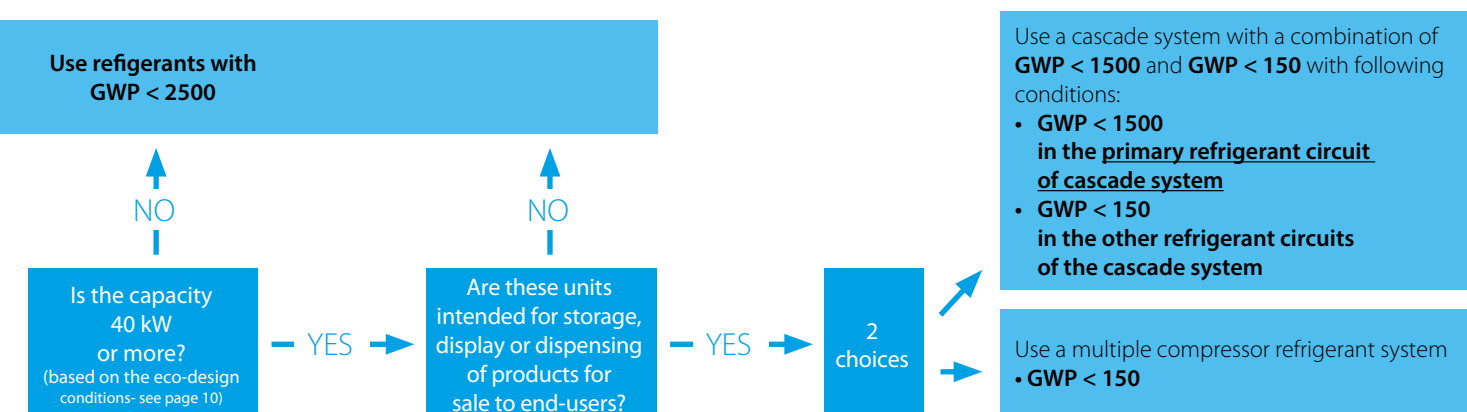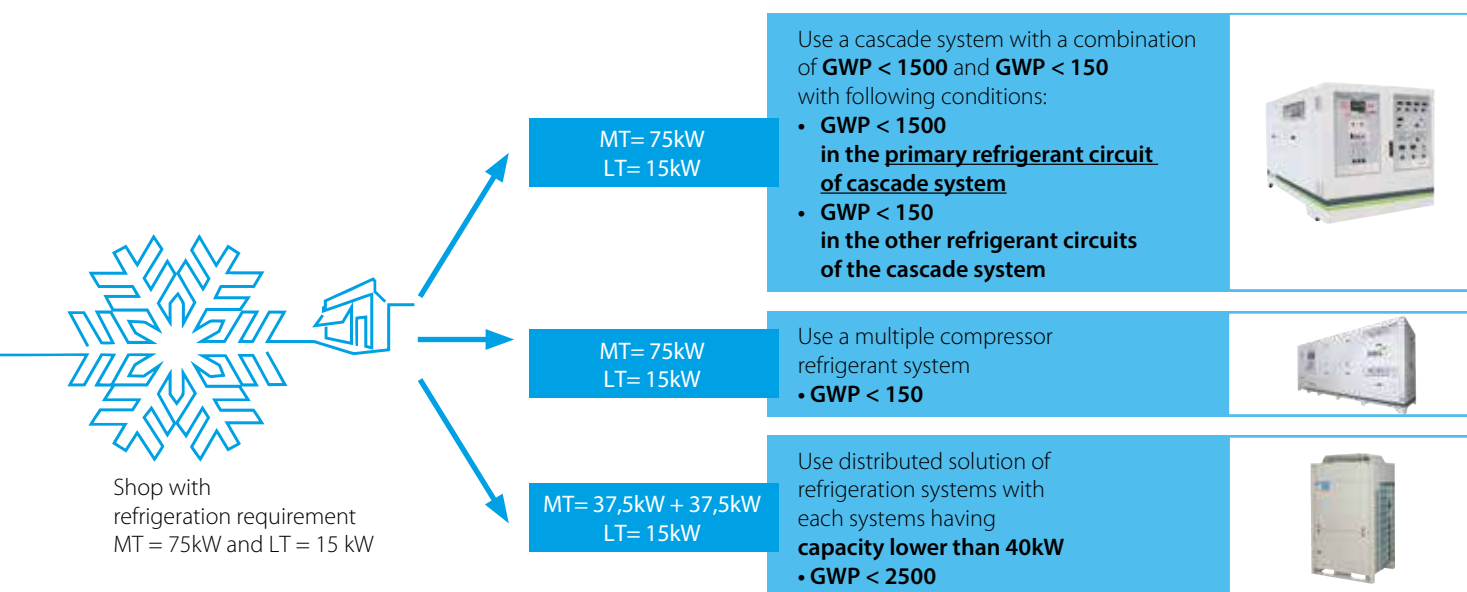

Tools and platforms

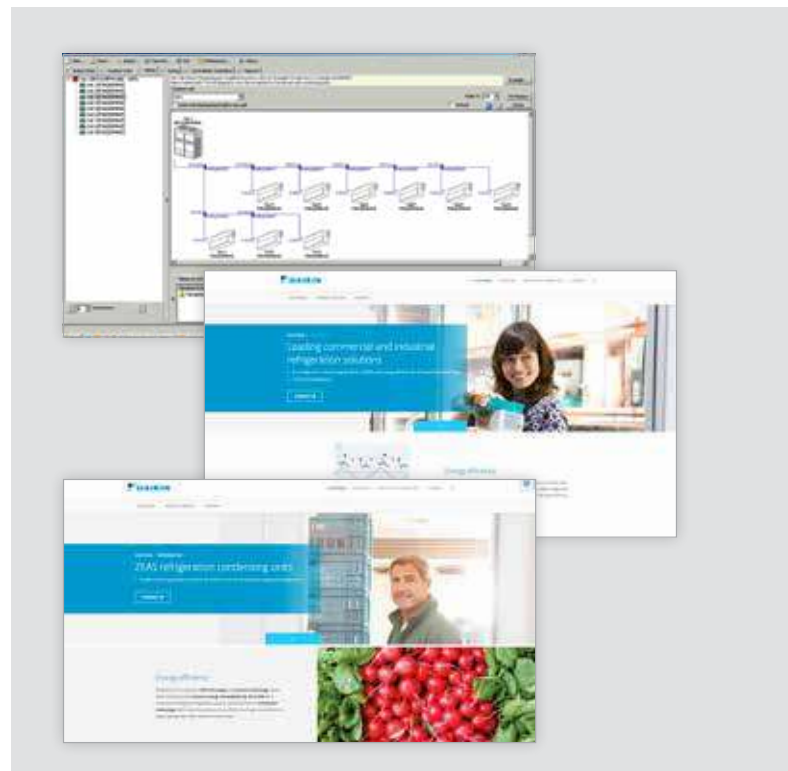

Sales supporting apps

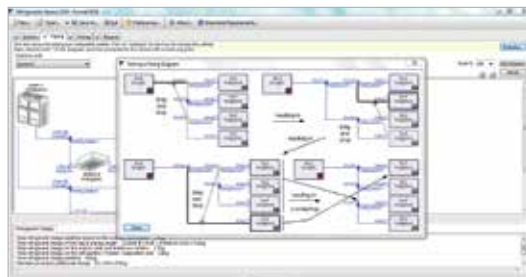

We offer a variety of building modelling, selection, simulation and quotation software tools to support your sales.

Refrigeration Xpress selection software

User-friendly selection software for Conveni-Pack, JEHCCU / JEHSCU, monoblocks, bi-blocks and ZEAS condensing units. Its detailed report includes a list of materials, piping and wiring diagrams, and device options. Design software available for Conveni-Pack and Zeas condensing units.



Psychrometric Diagram Viewer

The **Psychrometric Diagram Viewer** helps designers, consultants, students and other professionals to get more insight in our fields of activities: "the air that we condition"



Zanotti technical selection software

In order to obtain a precise selection of the refrigeration capacity and the equipment as well as to be able to select further products from our product range, we recommend our Zanotti selection software.


Please contact your local Daikin refrigeration sales team for more information.



Where to download the software? Where to find catalogues and data books?

- › Experience our business platform that thinks with you at my.daikin.eu
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

Find our solution for different applications:

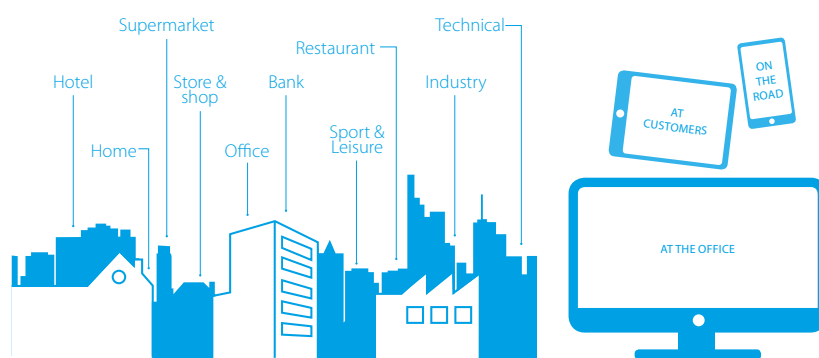

Register and login on
my.daikin.eu
and get what you want!

Quick selection guides for Uniblocks and Wineblocks



E-Care APP



Easy access to all the information about your unit, in mobile format. Daikin e-Care app incl. functionalities such as:

- › Product registration
- › e-Configurator
- › e-Doctor



E. LECLERC, HYPERMARKET
ZEAS



BEER COOLING FACILITY,
CHILLED WITH ZEAS



EDEKA, SUPERMARKET
CONVENI-PACK (2) AND ZEAS (1)


COOMBE FISHERIES
HIGH-PERFORMANCE ZANOTTI LT REFRIGERATION EQUIPMENT



ZIGGO DOME, EVENT HALL
ZEAS FOR COOLING (6) AND FREEZING (2)




YouTube



Products overview

		Technology compressor		Page	Hermetic			Semi-hermetic		Capacity control			
		Application	Refrigerant		Reciprocating compressor 	Rotary 	Scroll 	Reciprocating compressor 	Screw 	Varispeed	External frequency drive	DC control	Digital scroll
Plug & Play solution for cold room & wine rooms	Uni-block 	MT	R134a	22-25	•		•						
			R407C	22-25	•								
			R407H	22-25	•								
			R290	22-25	•								
		LT	R452A	22-25	•								
			R407F	22-25			•						
			R290	22-25	•								
	Biblock 	MT	R134a	26-28	•								
		LT	R452A	26-28	•								
			R407F	26-28	•								
	WINE 	HT Cooling	R134a	29-30	•								
Condensing units	Single CU (ON/OFF or INVERTER) 	MT	R449A*	34-40	•		•	•		•	•		•
			R134a	34-40	•		•	•		•	•		•
			R410A	44			•					•	
			FCAS FREE CO ₂	54		•		•			•	•	
		LT	R449A*	34-40	•		•	•		•	•		
			R407F	34-40	•		•	•		•	•		
			R410A	44			•					•	
			FCAS FREE CO ₂	54		•		•			•	•	
	Twin CU 	MT	R449A*	41	•		•	•		•	•		•
			R134a	41	•		•	•		•	•		•
			R410A	44			•					•	
			FCAS FREE CO ₂	54				•			•		
		LT	R449*	41	•		•	•		•	•		
			R407F	41	•		•	•		•	•		
	Multi CU 	MT	R449A	42-43			•			•	•		•
			R410A	44			•					•	
			FCAS FREE CO ₂	54				•			•		
		LT	R449A	42-43			•			•	•		
	Booster CU (MT + LT) 	MT	FCAS FREE CO ₂	55-57				•			•		
		LT	FCAS FREE CO ₂	55-57				•			•		
Compressor rack and packs	Racks 	MT	R449A	59-61	•		•	•	•	•	•		•
			R134a	59-61	•		•	•	•	•	•		•
		LT	R449A	59-61	•		•	•	•	•	•		
			R407F	59-61			•	•	•	•	•		
		MT	FCAS FREE CO ₂	64-65				•			•		
		LT	FCAS FREE CO ₂	66				•			•		
		MT	FCAS FREE CO ₂	66				•			•		
		LT	FCAS FREE CO ₂	66				•			•		
Integrated solutions (Refrigeration and climatisation)	Conveni-pack 	MT	R410A	72			•					•	
		LT	R410A	72			•					•	
		AC	R410A	72			•					•	
		HR + HP	R410A	72			•					•	
	MIX CU 	AC	FCAS FREE CO ₂	78-79				•			•		
		MT	FCAS FREE CO ₂	78-79				•			•		
	MIX RACK 	AC	FCAS FREE CO ₂	78-79				•			•		
		MT	FCAS FREE CO ₂	78-79				•			•		




Cooling capacity (kW)				
	10	100	200	500
0.8-11.8				
1.1-1.9				
0.8-3.7				
1.2-5.7				
0.6-54.0				
2.6-8.1				
0.8-2.6				
0.8-13.8				
0.6-4.8				
4.4-11.8				
0.7-2.3				
1.0-77.2				
1.0-69.6				
3.0-15.2				
3.2-40.0				
0.4-28.1				
0.5-23.7				
2.8-6.5				
1.5-8.0				
8.1-27.9				
6.3-25.8				
9.9-26.5				
15.4-47.5				
5.7-19.0				
5.1-17.7				
4.2-10.7				
45.6-183.4				
17.0-75.8				
36.0-119.7				
13.1-70.7				
7.0-29.6				
18.0-90.0				
8.0-30.0				
1.6-295.0				
0.7-233.0				
0.4-89.7				
0.5-88.8				
30.0-512.0				
30.0-400.0				
15.0-240.0				
13.7-22.8				
3.5-7.0				
14.0-26.8				
16.8-42.0				
18.0-150.0				
15.0-220.0				
18.0-150.0				
15.0-220.0				



Plug and Play solutions

for cold rooms and wine rooms

Model	Product name	Capacity (kW)	0	1	2	3,5	5	10	15	25	35
Uni-block system for wall mounted installation (optional through-wall) in small and medium sized cold rooms R-290 Propane natural refrigerant	(M)GM			R-290	R-452A	R-290					
Uni-block system for roof mounted installation in small and medium sized cold rooms R-290 Propane natural refrigerant	(M)SB			R-290	R-452A	R-134A					
Uni-block system for wall mounted installation in medium sized cold rooms	AS										
Bi-block system for wall mounted installation	GS										
Bi-block system for floor standing or roof mounted installation with capillary expansion system	SP-O										
Bi-block system for floor standing or roof mounted installation with thermostatic expansion valve	DB-O										
Wineblock	RCV / RDV										

Freezing (Low temperature)
(-20° C / +35° C)

Chilling (Medium temperature)
(0° C / +35° C)


Cooling (High Temperature)
(+20° C / +10° C)

Zanotti

Touch control

Zanotti presents the new "Touch Screen" control panel for GM monobloc units and GS split units. This new one User interface consists of keypad and display and allows easy access to all manual functions of the units.

The control of the refrigeration cycle, switching the unit on and off, the lighting in the cold room, activating the manual defrost process and setting the parameters are the features that are more intuitive with the new keyboard.

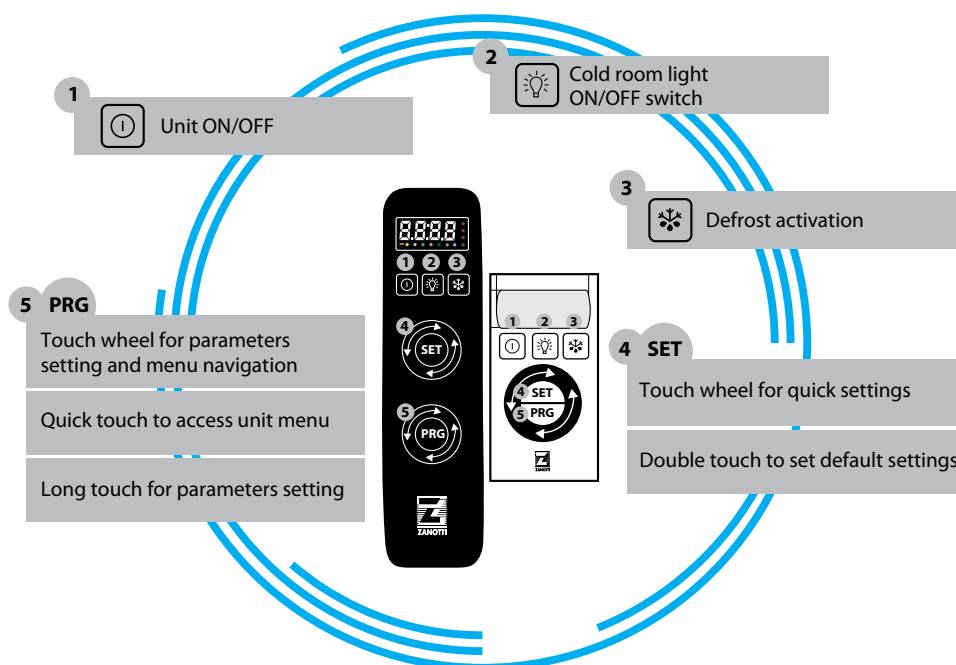

for two units in a cold storage cell

ALTERNATIVE REMOTE CONTROL

- › For cold rooms where it is required by law to maintain a certain temperature (Products for hospitals, Pharmaceutical products) for safety and control two aggregates in the same Cooling cell to be installed so that they are the same in alternate operation working hours.
- › If an aggregate is in full function

blocked due to a fault, automatically starts the second one Aggregate. For remote controls with Thermostat when the temperature is not for a certain period of time achieved (product feed, open cell door for a longer Period), the unit changes into the standby function.



- › Remote control for two aggregates adjustable Timer for the alternate Operation of the Aggregate.
- › In case of device failure, switch the Control on the standing device around. Alarm message through Lamp and buzzer.
- › Thermostat for Safety at high Temperatures in the cold room (only with models with Thermostat).

Uni-block system for low and medium temperature refrigeration



For wall mounted installation in small and medium sized cold rooms

- › Rapid mounting on the wall of the cold room by straddle-mounting, which is ideal for new installations or through-wall mounting, which is ideal for refurbishment projects
- › Metallic grey coloured finish of the outdoor unit
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Compressor compartment insulated with suitable soundproofing material to reduce sound levels
- › Microchannel condensers available in order to reduce the refrigerant charge as much as possible and ensuring higher energy efficiency
- › The units are provided with a new generation control panel with an easy-to-use interface




GM


Installation type

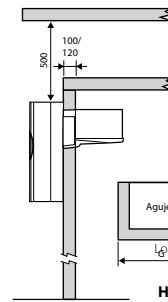

Through-wall model



Straddle model

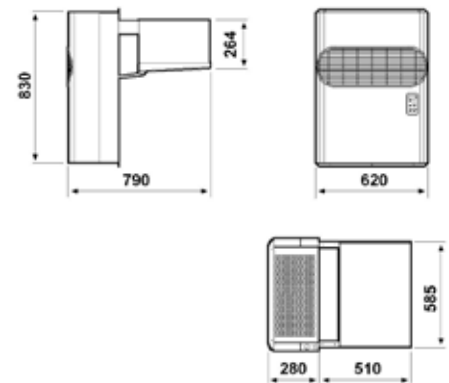

Low temperature refrigeration				GM	BGM110 DA11XA	BGM0870 Y1AA	BGM112 DA11XA	BGM117 DA11XA	BGM218 DA11XA	BGM220 DB11XA	BGM330 DB11XA
Refrigerating capacity	Low temperature	R-290	Nom	kW	-	0.87 (1)					
		R-452A	Nom	kW	0.679 (1)	-	0.889 (1)	1.080 (1)	1.336 (1)	1.688 (1)	2.349 (1)
Dimensions	Unit	HeightxWidthxDepth		mm	735x400x790			830x620x790		830x620x862	
	Packed unit	HeightxWidthxDepth		mm	942x450x850			1,050x670x850		1,050x670x940	
Weight	Unit			kg	56		64		80		105
	Packed unit			kg	67		75		96		122
Compressor	Type				Hermetic Reciprocating						
	Nominal power			kW	0.74	0.9		1.3		1.5	2.2
	Starting method				Direct						
Condenser	Air flow			m ³ /h	600	720	600		1,200		1,500
Defrost					Hot gas						
Evaporator	Air flow			m ³ /h	600	672	600		1,200		1,500
	Air throw			m	4						
Operation range	Cold room temperature	Min. ~Max.		°C	-25~-15						
Refrigerant	Type/GWP				R-452A/2,141	R-290/3		R-452A/2,141			
	Charge			kg/TCO _{Eq}	0.38/0.81	0.15/0.0000	0.34/0.73	0.35/0.75	0.86/1.84	0.84/1.80	0.98/2.10
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230						

Medium temperature refrigeration				GM	MGM103 EA11XA	MGM105 EA11XA	MGM106 EA11XA	MGM128 OY1WA	MGM107 EA11XA	MGM110 EA11XA	MGM211 EA11XA	MGM221 OY1WA	MGM212 EB11XA	MGM213 EB11XA	MGM315 EB11XA	MGM320 EB11XA	
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	0.855 (2)	0.978 (2)	1.120 (2)	-	1.315 (2)	1.351 (2)	1.806 (2)	-	2.034 (2)	2.175 (2)	3.079 (2)	3.351 (2)	
		R-290	Nom	kW	-	-	-	1.31 (1)	-	-	-	2.18 (1)	-	-	-	-	
Dimensions	Unit	HeightxWidthxDepth		mm	735x400x790						830x620x790				830x620x682		
	Packed unit	HeightxWidthxDepth		mm	942x450x850						1,050x670x850				1,050x670x940		
Weight	Unit			kg	52	53	56		64		80		98		100		
	Packed unit			kg	63	64	67		75		96				115		
Compressor	Type				Hermetic Reciprocating												
	Starting method				Direct												
Condenser	Air flow			m³/h	600						1,200	-	1,200		1,500		
Defrost					Hot gas												
Evaporator	Air flow			m³/h	600						1,200	1,125	1,200		1,800		
	Air throw			m	4												
Operation range	Cold room temperature	Min. ~Max.		°C	-5~-10												
Refrigerant	Type/GWP				R-134a/1,430			R-290/3	R-134a/1,430			R-290/3	R-134a/1,430				
	Charge		kg/TCO _{Eq}		0.40/0.57	0.43/0.61		0.15/0.00	0.33/0.47	0.40/0.57	0.71/1.02	0.15/0.00	0.70/1.00	0.75/1.07	0.95/1.36	1.00/1.43	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230										3N~/50/400		

(1) When normally running: -20°C / +30°C

(2) When normally running: 0°C / +30°C

Uni-block system for low and medium temperature refrigeration



For wall mounted installation in medium sized cold rooms

- › Rapid mounting on the wall of the cold room by through-wall mounting
- › Extremely fast to assemble, reducing installation time and cost
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Very compact and very efficient
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements



AS

Installation type

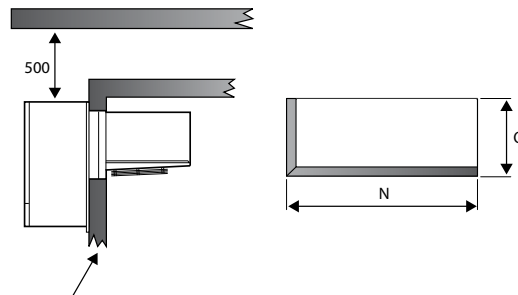

Drain pan connection: Ø 18 (AS235), Ø 22 (AS335-AS340)



MAS235T02E



MAS335N02E



MAS340T02E

Low and medium temperature refrigeration				AS	MAS235T02E	MAS335N02E	MAS335T02E	MAS340T02E
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	4.981 (2)	6.988 (2)	8.290 (2)	10.664 (2)
Dimensions	Unit	Height x Width x Depth		mm	857 x 1,280 x 1,140		857 x 1,790 x 1,240	
	Packed unit	Height x Width x Depth		mm	1,060 x 1,330 x 1,210		1,065 x 1,850 x 1,420	
Weight	Unit			kg	162	221	222	244
	Packed unit			kg	202	276	277	361
Compressor	Type				Hermetic Reciprocating			
	Nominal power			kW	3.7	4.8	6.3	7.4
	Starting method				Direct			
Operation range	Cold room temperature	Min. ~Max.		°C	-5 ~10			
Refrigerant	Type				R-134a			
	GWP				1,430			
Evaporator	Air flow			m³/h	3,900	5,600	8,000	
	Air throw			m	10 (3)		17 (3)	
Condenser	Air flow			m³/h	2,700	4,000	5,600	
Defrost					Hot gas			
Power supply	Voltage/Phase/Frequency			V/Hz	400 / 3N~ / 50			

(1) When normally running: -20°C / +30°C

(2) When normally running: 0°C / +30°C

(3) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.


Uni-block system for low and medium temperature refrigeration

For roof mounted installation in small and medium sized cold rooms


- › Rapid mounting on the roof of the cold room
- › Ceiling assembly leaves the space inside the cold room completely free
- › The white colour of the evaporator blends unobtrusively with the cold room walls
- › Extremely fast to assemble, reducing installation time and cost
- › Best surface-to-capacity ratio
- › Remote electronic command station with easy-to-use user interface programmable according to various system requirements




Installation type




SB120

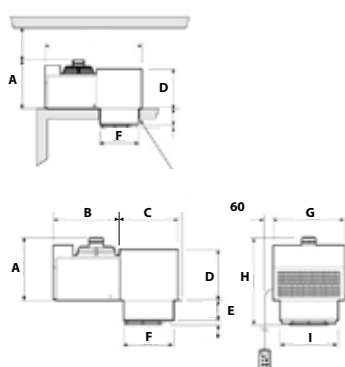

SB140

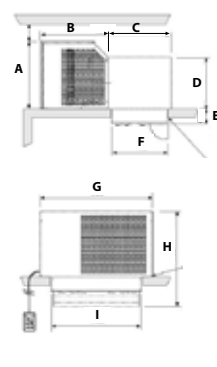

SB125-235

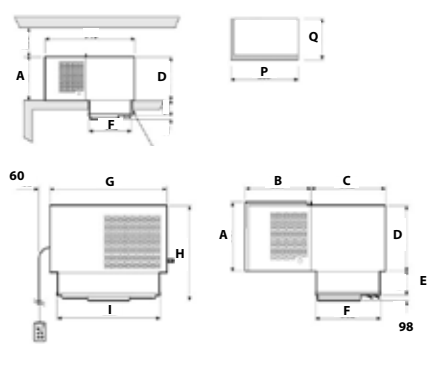

Low temperature refrigeration				BSB	010DA11XX	0870Y1AA	117DA11XX	330DB11XX	2650Y3AB	220DB11XX	1710Y2AA	
Refrigerating capacity	Low temperature	R-290	Nom	kW	-	0.871 (1)	-	-	2.650 (1)	-	1.710 (1)	
		R-452A	Nom	kW	0.628 (1)	-	1.029 (1)	2.472 (1)	-	1.699 (1)	-	
Dimensions	Unit	Height x Width x Depth		mm	525 x 430 x 771	340 x 620 x 719	506 x 620 x 719	645 x 820 x 929	1044 x 1300 x 520	540 x 820 x 809	924 x 1075 x 360	
	Packed unit	Height x Width x Depth		mm	690 x 540 x830	660 x 730 x 790			800x930x1000		690 x 930 x 880	
Weight	Unit			kg	48	68			102	200	87	102
	Packed unit			kg	61	82			124	114	108	-
Compressor	Type	Hermetic Reciprocating										
	Nominal power			kW	0.6	-	1.3	2.2	-	1.5	-	
	Starting method	Direct										
Operation range	Cold room temperature	Min. ~Max.		°C	-25 ~-15							
Refrigerant	Type				R-452A	R290	R-452A		R290	R-452A	R290	
	GWP				2,141.0	3.0	2,141.0		3.0	2,141.0	3.0	
Evaporator	Air flow			m³/h	500	780	550	2,300	2,560	1,100	1,320	
	Air throw			m	3 (3)	4 (3)			10 (3)	4 (3)		
Condenser	Air flow			m³/h	400	640	750	1,500	2,010	1,400	1,200	
Defrost					Hot gas							
Power supply	Voltage / Phase /Frequency			V/Hz	230 / 1~ / 50			400 / 3N~ / 50			230 / 1~ / 50	

Medium temperature refrigeration				MSB	005EA 11XX	106EA 11XX	107EA 11XX	1310Y 1AA	315EB 11XX	2180Y 1AA	320EB 11XX	3370Y 2AA	425EB 11XX	210EA 11XX	5820Y 3AB	212EB 11XX	530EB 11XX		
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	0.857 (2)	1.120 (2)	1.338 (2)	-	3.282 (2)	-	3.550 (2)	-	3.774 (2)	1.799 (2)	-	2.022 (2)	4.871 (2)		
		R-290	Nom	kW	-			1.31 (2)	-	2.18 (2)	-	3.37 (2)	-			5.82 (2)	-		
Dimensions	Unit	Height x Width x Depth		mm	525 x 430 x 771	506 x 620 x 719		340 x 620 x 719	645 x 820 x 929	360 x 820 x 809	645 x 820 x 929	1,044x1,300x410		760 x 920 x 1,042	540 x 820 x 809	1,044 x 1,300 x 520	540 x 820 x 809	785 x 1,075 x 1,046	
	Packed unit	Height x Width x Depth		mm	690 x 540 x 830		660 x 730 x 790		800 x 930 x 1,000				880 x 1,100 x 1,100		690 x 930 x 880	-	690 x 930 x 880	920 x 1,200 x 1,120	
Weight	Unit			kg	42	59			92	75	92	102		110	74	200	75	151	
	Packed unit			kg	55	73			114				139	95	96			184	
Compressor	Type	Hermetic Reciprocating																	
	Nominal power			kW	0.5	0.6	0.7	-	2.2	-	2.6	-	2.9	0.9	-	1.7	3.7		
Operation range	Starting method	Direct																	
	Cold room temperature	Min. ~Max.		°C	-5 ~-10														
Refrigerant	Type																		
	GWP				R-134a			R290	R-134a	R290	R-134a	R290	R-134a		R290	R-134a			
Evaporator	Air flow			m³/h	500	550		610	2,300	1,220	2,300	1,500	2,300	1,100	3,600	1,100	3,450		
	Air throw			m	3 (3)	4 (3)			10 (3)				4 (3)			10 (3)			
Condenser	Air flow			m³/h	400	750		640	1,500	1,200	1,500	1,755	3,100	1,400	2,900	1,400	3,200		
Defrost																			
Power supply	Voltage / Phase/Frequency		V/Hz	230 / 1~ / 50					400 / 3N~ / 50					230 / 1~ / 50			400 / 3N~ / 50		

(1) When normally running: -20°C / +30°C

(2) When normally running: 0°C / +30°C


(3) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.

Bi-block system for low and medium temperature refrigeration

Condensing unit for wall mounted installation

- › Wall mounted condensing unit and ceiling mounted evaporator
- › Extremely rapid mounting
- › Best surface-to-capacity ratio
- › Low sound levels thanks to optional compressor compartment soundproofing
- › New generation control panel: possibility to connect it to classic remote management systems or to a Modbus system
- › Winter Kit

Installation type



Low temperature refrigeration					GS	SB.BGS110P			SB.BGS112P			SB.BGS117P			SB.BGS218P			SB.BGS220P			SB.BGS330P					
						1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D			
Refrigerating capacity	Low temperature	R-452A	Nom	kW	0.679 (1)			0.889 (1)			1.080 (1)			1.336 (1)			1.688 (1)			2.349 (1)						
Dimensions	Condensing unit	Height x Width x Depth	mm	735 x 400 x 280			215 x 654 x 410			830 x 620 x 280			215 x 1,074 x 410			215 x 1,654 x 410			830 x 620 x 350							
	Evaporator unit	Height x Width x Depth	mm	215 x 654 x 410			955 x 490 x 610			1,050 x 490 x 740			1,050 x 600 x 740			1,050 x 600 x 740			1,050 x 600 x 740							
	Packed condensing unit	Height x Width x Depth	mm	955 x 490 x 610			470 x 260 x 780			470 x 260 x 1,200			470 x 260 x 1,200			470 x 260 x 1,780			470 x 260 x 1,780							
	Packed evaporator unit	Height x Width x Depth	mm	470 x 260 x 780																						
Weight	Condensing unit		kg	46			54			64			19			76			84							
	Evaporator unit		kg				13						19			76			28							
	Packed condensing unit		kg	57			65						76			98			98							
	Packed evaporator unit		kg				15						21			31			31							
Compressor	Type			Hermetic Reciprocating																						
	Nominal power		kW	0.74			0.9			1.3			1.5			2.2										
	Starting method			Direct																						
Operation range	Cold room temperature	Min. ~Max.	°C	-25 ~-15																						
Refrigerant	Type			R-452A																						
	GWP			2,141																						
Evaporator	Air flow		m³/h				600						1,200						1,800							
	Air throw		m							4 (3)																
Condenser	Air flow		m³/h				600						1,200						1,500							
Defrost				Hot gas																						
Piping length			m	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10		
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50															400 / 3N~ / 50						


Medium temperature refrigeration				GS	SB.MGS103P			SB.MGS105P			SB.MGS106P			SB.MGS107P			SB.MGS110P			SB.MGS211P			SB.MGS212P			SB.MGS213P			SB.MGS315P			SB.MGS320P					
					1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E			
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	0.855 (2)			0.978 (2)			1.120 (2)			1.315 (2)			1.351 (2)			1.806 (2)			2.034 (2)			2.175 (2)			3.079 (2)			3.351 (2)					
Dimensions	Condensing unit	Height x Width x Depth	mm					735 x 400 x 280									830 x 620 x 280						830 x 620 x 350														
	Evaporator unit	Height x Width x Depth	mm					215 x 654 x 410									215 x 1,074 x 410						215 x 1,654 x 410														
	Packed condensing unit	Height x Width x Depth	mm					955 x 490 x 610									1,050 x 490 x 740						1,050 x 600 x 740														
	Packed evaporator unit	Height x Width x Depth	mm					470 x 260 x 780									470 x 260 x 1,200						470 x 260 x 1,780														
Weight	Condensing unit		kg		42			43			46			54			64			77			79			19			28			91			93		
	Evaporator unit		kg					13						65			19						76			91			28			93					
	Packed condensing unit		kg		53			54			57			65			76			91			93														
	Packed evaporator unit		kg					15									19			31																	
Compressor	Type				Hermetic Reciprocating																																
	Nominal power		kW		0.4			0.5			0.4			0.7			0.9			1.7			2			2.2			2.6								
	Starting method				Direct																																
Operation range	Cold room temperature	Min. ~Max.	°C		-5 ~-10																																
Refrigerant	Type				R-134a																																
	GWP				1,430																																
Evaporator	Air flow		m³/h					600									1,200						1,800														
	Air throw		m											4 (3)																							
Condenser	Air flow		m³/h					600									1,200						1,500														
Defrost					Electric																																
Piping length			m		2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10						
Power supply	Voltage / Phase / Frequency		V/Hz		230 / 1~ / 50															400 / 3N~ / 50																	

Bi-block system for low and medium temperature refrigeration

Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor standing or roof mounted installation and ceiling mounted evaporator
- › Extremely fast to assemble thanks to quick connection joints
- › Reduced installation time and cost
- › Best surface-to-capacity ratio

Installation type



				SP-O	SB.BSP110P			SB.BSP112P			SB.BSP117P			SB.BSP330P			SB.BSP218P			SB.BSP220P		
					1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D	1D	2D	3D
Refrigerating capacity	Low temperature	R-452A	Nom	kW	0.662 (1)			0.905 (1)			1.088 (1)			2.384 (1)			1.342 (1)			1.719 (1)		
Dimensions	Condensing unit	Height x Width x Depth	mm		357 x 620 x 337			215 x 614 x 410			427 x 820 x 427			215 x 1,614 x 410			390 x 820 x 427			215 x 1,034 x 410		
	Evaporator unit	Height x Width x Depth	mm		215 x 614 x 410			690 x 520 x 780			260 x 470 x 780			260 x 470 x 1,780			690 x 620 x 1,010			260 x 470 x 1,200		
	Packed condensing unit	Height x Width x Depth	mm		690 x 520 x 780			260 x 470 x 780			260 x 470 x 1,780			260 x 470 x 1,780			690 x 620 x 1,010			260 x 470 x 1,200		
	Packed evaporator unit	Height x Width x Depth	mm		260 x 470 x 780			260 x 470 x 780			260 x 470 x 1,780			260 x 470 x 1,780			690 x 620 x 1,010			260 x 470 x 1,200		
Weight	Condensing unit		kg		45			50			78			78			61			69		
	Evaporator unit		kg					13			28			28			19			19		
	Packed condensing unit		kg		74			79			116			116			99			107		
	Packed evaporator unit		kg					15			30			30			21			21		
Compressor	Type				Hermetic Reciprocating																	
	Nominal power		kW		0.75			1.1			1.3			2.2			1.3			1.5		
	Starting method				Direct																	
Operation range	Cold room temperature	Min. ~Max.	°C		-25 ~-15																	
Refrigerant	GWP				2,141																	
Evaporator	Air flow		m³/h		600			600			1,800			1,800			1,200			1,200		
	Air throw		m								4 (3)			4 (3)								
Condenser	Air flow		m³/h		750			750			1,500			1,500			1,400			1,400		
Defrost					Electric																	
Piping Length				m	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50																	

				SP-O	SB.MSP106P			SB.MSP107P			SB.MSP315P			SB.MSP320P			SB.MSP212P			SB.MSP213P							
					1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E	1E	2E	3E					
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	1.140 (2)			1.422 (2)			3.188 (2)			3.492 (2)			1.816 (2)			2.029 (2)							
Dimensions	Condensing unit	Height x Width x Depth	mm	357 x 620 x 337			427 x 820 x 427			215 x 1,614 x 410			390 x 820 x 427			215 x 1,034 x 410											
	Evaporator unit	Height x Width x Depth	mm	215 x 614 x 410			215 x 1,614 x 410			215 x 1,034 x 410			215 x 1,034 x 410			215 x 1,034 x 410											
	Packed condensing unit	Height x Width x Depth	mm	690 x 520 x 780			690 x 520 x 780			690 x 520 x 780			690 x 520 x 780			690 x 520 x 780											
	Packed evaporator unit	Height x Width x Depth	mm	260 x 470 x 780			260 x 470 x 780			260 x 470 x 1,780			260 x 470 x 1,200			260 x 470 x 1,200											
Weight	Condensing unit		kg	43			69			70			59			61											
	Evaporator unit		kg	13			28			19			19														
	Packed condensing unit		kg	72			107			108			97			99											
	Packed evaporator unit		kg	15			30			21			21														
Compressor	Type			Hermetic Reciprocating																							
	Nominal power		kW	0.4			0.7			2.2			2.6			0.9			1.7								
	Starting method			Direct																							
Operation range	Cold room temperature	Min. ~Max.	°C	-5 ~-10																							
Refrigerant	GWP			1,430																							
Evaporator	Air flow		m³/h	600			1,800			1,200			1,200														
	Air throw		m				4 (3)			4 (3)																	
Condenser	Air flow		m³/h	750			1,500			1,400			1,400														
Defrost				Electric																							
Piping Length			m	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10	2.5	5	10						
Power supply	Voltage / Phase / Frequency		V/Hz	230 / 1~ / 50									400 / 3N~ / 50									230 / 1~ / 50			400 / 3N~ / 50		

(1) When normally running: -20°C / +30°C

(2) When normally running: +0°C / +30°C


(3) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.

Bi-block system for low and medium temperature refrigeration

Condensing unit for floor standing or roof mounted installation

- › Condensing unit for floor standing or roof mounted installation and ceiling mounted evaporator
- › Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- › Extremely fast to assemble thanks to quick connection joints
- › Reduced installation time and cost
- › Best surface-to-capacity ratio

Installation type



				DB-O	SB.BDB 110DA12XX	SB.BDB 112DA12XX	SB.BDB 117DA12XX	SB.BDB 320DA13XX	SB.BDB 330DA13XX	SB.BDB 218DA12XX	SB.BDB 220DA12XX
Refrigerating capacity	Low temperature	R-452A	Nom	kW	0.662 (1)	0.905 (1)	1.088 (1)	2.384 (1)	2.38 (1)	1.342 (1)	1.719 (1)
Dimensions	Condensing unit	Height x Width x Depth		mm	357 x 620 x 337			427 x 820 x 427		390 x 820 x 427	
	Evaporator unit	Height x Width x Depth		mm	215 x 614 x 410			215 x 1,614 x 410		215 x 1,034 x 410	
	Packed condensing unit	Height x Width x Depth		mm	590 x 419 x 810			610 x 520 x 1,010			
	Packed evaporator unit	Height x Width x Depth		mm	260 x 470 x 780			260 x 470 x 1,200			
Weight	Condensing unit			kg	45	50		72	78	61	69
	Evaporator unit			kg	13			28		19	
	Packed condensing unit			kg	55	60		86	92	75	83
	Packed evaporator unit			kg	15			31		21	
Compressor	Type			Hermetic Reciprocating							
	Nominal power			kW	0.75	1.1	1.3	2.2		1.3	1.5
	Starting method			Direct							
Operation range	Cold room temperature	Min. ~Max.	°C	-25 ~-15							
Refrigerant	Type			R-452A							
	GWP			2,142							
Evaporator	Air flow			m³/h	600			1,800		1,200	
	Air throw			m	4 (3)						
Condenser	Air flow			m³/h	750			1,500		1,400	
Defrost				Electric							
Power supply	Voltage/Phase/Frequency		V/Hz	230/1~/50				400/3N~/50		230/1~/50	400/3N~/50

				DB-O	SB.MDB 106A12XX	SB.MDB 107A12XX	SB.MDB 315A13XX	SB.MDB 320A13XX	SB.MDB 425A13XX	SB.MDB 635A13XX	SB.MDB 645A13XX	SB.MDB 706A13XX	SB.MDB 530A13XX	SB.MDB 707A13XX	SB.MDB 212A12XX	SB.MDB 213A12XX
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	1.140 (2)	1.422 (2)	3.188 (2)	3.492 (2)	3.606 (2)	7.293 (2)	8.779 (2)	11.014 (2)	5.070 (2)	14.069 (2)	1.816 (2)	2.029 (2)
Dimensions	Condensing unit	Height x Width x Depth	mm		357 x 620 x 337		427 x 820 x 427	427 x 820 x 427	540 x 920 x 540	654 x 1,575 x 642		885 x 1,725 x 742	594 x 1,075 x 532	885 x 1,725 x 742	390 x 820 x 427	
	Evaporator unit	Height x Width x Depth	mm		215 x 614 x 410		215 x 1,614 x 410	215 x 1,614 x 410	545 x 805 x 690	600 x 1,690 x 690		620 x 1,840 x 700	530 x 1,220 x 690	620 x 1,840 x 700	215 x 1,034 x 410	
	Packed condensing unit	Height x Width x Depth	mm		590 x 419 x 810		610 x 520 x 1,010	610 x 520 x 1,010	880 x 650 x 1,200	750 x 890 x 1,840		780 x 890 x 1,990	710 x 820 x 1,280	780 x 890 x 1,990	610 x 520 x 1,010	
	Packed evaporator unit	Height x Width x Depth	mm		260 x 470 x 780		260 x 470 x 1,200	260 x 470 x 1,200	702 x 814 x 1,004	865 x 780 x 1,850		1,100 x 880 x 2,000	865 x 780 x 1,850	1,100 x 880 x 2,000	260 x 470 x 1,200	
Weight	Condensing unit		kg		43		69	70	95	158	159	195	104	220	59	61
	Evaporator unit		kg		13		28	28	37	84		102	53	102	19	
	Packed condensing unit		kg		53		83	84	114	247	248	309	193	334	73	75
	Packed evaporator unit		kg		15		30	30	53	140		165	85	165	21	
Compressor	Type			Hermetic Reciprocating												
	Nominal power		kW	0.4	0.7	2.2	2.6	2.94	4.8	6.3	7.4	3.7	9.555	0.9	1.7	
	Starting method			Direct												
Operation range	Cold room temperature	Min. ~Max.	°C	-5 ~-10												
Refrigerant	Type			R-134a												
	GWP			1,430												
Evaporator	Air flow		m³/h	600		1,800	1,800	2,300	6,800	6,400	8,400	4,600	8,000		1,200	
	Air throw		m		4 (3)				12 (3)	11 (3)	13 (3)	11 (3)	12 (3)		4 (3)	
Condenser	Air flow		m³/h	750		1,500		3,150	5,500	7,000	8,100	3,200	8,100		1,400	
Defrost				Electric												
Power supply	Voltage/Phase/Frequency		V/Hz	230/1~/50	400/3N~/50	400/3N~/50		400/3N~/50			400/3N~/50			230/1~/50 400/3N~/50		

(1) When normally running: -20°C / +30°C

(2) When normally running: 0°C / +30°C

(3) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.w

Wineblock - Monoblock units for high temperature refrigeration





Monoblock system suitable for through-wall installation

- › Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- › Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- › Electronic controller managing both temperature and humidity of the cold room



RCV

Installation type

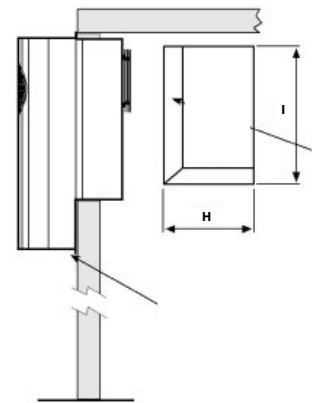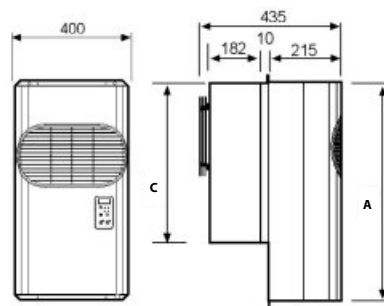

				RCV	RCV101527E	RCV101528E	RCV102527E	RCV102528E	RCV201527E	RCV201528E	RCV202527E	RCV202528E
Refrigerating capacity	High temperature	R-134a	Nom	kW	0.6(1)		1(1)		1.4(1)		2.3(1)	
Heating capacity	R-134a	Nom		kW	0.7(1)		1.05(1)		1.4(1)		1.75(1)	
Dimensions	Unit	Height x Width x Depth		mm	735 x 400 x 435				735 x 620 x 435			
	Packed unit	Height x Width x Depth		mm	955 x 435 x 495				955 x 655 x 495			
Weight	Unit			kg	49	50	52	53	77	78	79	80
	Packed unit			kg	59	60	62	63	89	90	91	92
Compressor	Type				Hermetic Reciprocating							
	Nominal power			kW	0.25		0.37		0.46		0.55	
Operation range	Cold room temperature	Min. ~Max.		°C	10 ~20							
Refrigerant	Type				R-134a							
	GWP				1,430							
Evaporator	Air flow			m³/h	600				1,200			
	Air throw			m					4 (2)			
Condenser	Air flow			m³/h	600				1,200			
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1 ~ / 50							

(1) When normally running: +10°C / +30°C

(2) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.



Wineblock - Split units for high temperature refrigeration

Compact condensing unit and small-sized wall or ceiling mounted evaporators

- Accurate humidity and temperature control to guarantee the quality of products (e.g. wines)
- Thermostatic expansion valve ensuring optimum capacity in accordance with the required load for better energy efficiency
- Integrated humidifier available depending on model to have one unit which covers it all: perfect humidity & temperature control
- Electronic controller managing both temperature and humidity of the cold room



Installation type

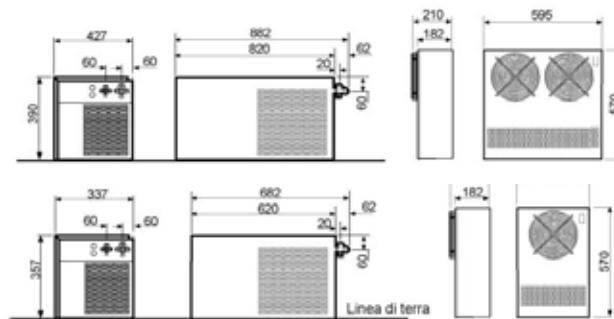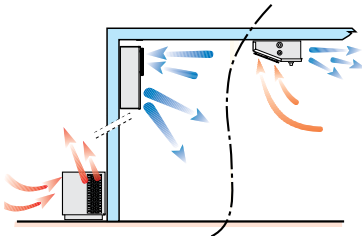

RDV					SB.RDV101529E	SB.RDV101523E	SB.RDV101524E	SB.RDV101525E	SB.RDV102529E	SB.RDV102523E	SB.RDV102524E	SB.RDV102525E
Refrigerating capacity	High temperature	R-134a	Nom	kW	0.600 (1)				1.000 (1)			
Heating capacity	R-134a	Nom		kW	0.700		0.900		1.050		0.900	
Dimensions	Condensing unit	Height x Width x Depth		mm	357/682/337							
	Evaporator unit	Height x Width x Depth		mm	570 x 375 x 210		215 x 669 x 490		570 x 375 x 210		215 x 669 x 490	
	Packed condensing unit	Height x Width x Depth		mm	590 x 800 x 400							
	Packed evaporator unit	Height x Width x Depth		mm	610 x 250 x 525		540 x 250 x 1,190		610 x 250 x 525		540 x 250 x 1,190	
Weight	Condensing unit			kg	32	33		32	35	36		35
	Evaporator unit			kg	12	13		12		13		12
	Packed condensing unit			kg	37	38		37	40	41		40
	Packed evaporator unit			kg	14	15		14		15		14
Compressor	Type				Hermetic Reciprocating							
	Nominal power			kW	0.25				0.37			
	Starting method				Direct							
Operation range	Cold room temperature	Min. ~Max.		°C	10 ~20							
Refrigerant	Type				R-134a							
	GWP				1,430							
Evaporator	Air flow			m³/h	500		400		500		400	
	Air throw			m	4 (2)							
Condenser	Air flow			m³/h	600							
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50							

RDV					SB.RDV201529E	SB.RDV201523E	SB.RDV201524E	SB.RDV201525E	SB.RDV202529E	SB.RDV202523E	SB.RDV202524E	SB.RDV202525E	
Refrigerating capacity	High temperature	R-134a	Nom	kW	1.400 (1)				2.300 (1)				
Heating capacity	R-134a	Nom	kW	1.400		1.600			1.750 (1)		1.600		
Dimensions	Condensing unit	Height x Width x Depth	mm	390/882/427									
	Evaporator unit	Height x Width x Depth	mm	570 x 595 x 210		215 x 1,089 x 490			570 x 595 x 210		215 x 195 x 490	215 x 1,089 x 490	
	Packed condensing unit	Height x Width x Depth	mm	610 x 510 x 1,000									
	Packed evaporator unit	Height x Width x Depth	mm	610 x 250 x 745		540 x 250 x 1,190			610 x 250 x 745		540 x 1,089 x 1,190	540 x 250 x 1,190	
Weight	Condensing unit		kg	60	61		60		62	63	68	62	
	Evaporator unit		kg	18	19		18		19		18		
	Packed condensing unit		kg	67	68		67		69	70	75	69	
	Packed evaporator unit		kg	20	21		22		20		21	22	20
Compressor	Type			Hermetic Reciprocating									
	Nominal power		kW	0.46				0.55					
	Starting method			Direct									
Operation range	Cold room temperature	Min. ~Max.	°C	10 ~20									
Refrigerant	Type			R-134a									
	GWP			1,430									
Evaporator	Air flow		m³/h	1,000		800			1,000		800		
	Air throw		m	4 (2)									
Condenser	Air flow		m³/h	1,200		1,100			1,200		1,100		
Power supply	Voltage / Phase / Frequency			V/Hz	230 / 1~ / 50								


(1) When normally running: +10°C / +30°C

(2) Use air throw as a base. Air throw is affected by many factors such as height of room, product storage, location of evaporator, etc.





Condensing units

Model	Product name	Capacity (kW)	0	2	5	10	25	50	100	150	300	450
Commercial plug-in condensing units	JEHCCU and JEHSCU											
Small condensing units	CU series											
	CU series											
	CU series											
	CU series											
Large condensing units	CM series											
	CM series											
Small inverter condensing unit for commercial refrigeration	Mini-ZEAS LRME-BY1											
Inverter condensing unit for commercial refrigeration	ZEAS LREQ-BY1											
	Multi ZEAS LREQ-BY1R											
CO ₂												
												

Freezing (Low temperature) (-20° C) Chilling (Medium temperature) (0° C)

JEHCCU and JEHSCU

Commercial plug-in condensing units

Why Daikin condensing units?

Daikin's commercial condensing units are ideal for use in cold stores, pubs, hotels, butchers, bakeries and similar locations which need reliable cooling at medium temperature.

- › Daikin JEHCCU and JEHSCU series plug-in condensing units are the perfect solution for those looking for compact and economically priced solutions.
- › Highly energy-efficient with operating ambient temperatures ranging from -15°C to +43°C.
- › Daikin condensing kits are suitable for refrigerants R-407F, R-407A, R-404A, R-134a and latest low GWP refrigerants R-448A and R-449A
- › Carefully designed details: the whole range utilizes proven and specially optimized components for Daikin.

- › Fast assembly, easy handling and an energy-optimized design ensure low investment and operating costs
- › Redesigned to be lightweight and compact, with easy access, making installation and maintenance straightforward.
- › Improved design and sound insulation make them ideal for urban locations, particularly near residential areas.



Product overview - JEHCCU and JEHSCU condensing units

		Scroll compressor		Reciprocating compressor		230 V current		400 V current																		
																										
										NEW																
										= R404A = R-407F = R-407A = R-134A = R-448A = R-449A																
										Refrigeration capacity (kW)																
MT cooling										< 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
JEHCCU 0040 CM1																										
JEHCCU 0051 CM1																										
JEHCCU 0063 CM1																										
JEHCCU 0077 CM1																										
JEHCCU 0095 CM1																										
JEHCCU 0050 CM1																										
JEHCCU 0067 CM1																										
JEHCCU 0100 CM1																										
JEHCCU 0113 CM1																										
JEHCCU 0140 CM1/3																										
JEHSCU 0200 CM1/3																										
JEHSCU 0250 CM1/3																										
JEHSCU 0300 CM1/3																										
JEHSCU 0350 CM3																										
JEHSCU 0400 CM3																										
JEHSCU 0500 CM3																										
JEHSCU 0600 CM3																										
JEHSCU 0680 CM3																										
JEHSCU 0800 CM3																										
JEHSCU 1000 CM3																										
LT cooling										< 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
JEHCCU 0115 CL1																										
JEHSCU 0200 CL3																										
JEHSCU 0300 CL3																										
JEHSCU 0400 CL3																										
JEHSCU 0500 CL3																										
JEHSCU 0600 CL3																										
JEHSCU 0750 CL3																										

MT: Evaporation temperature -10°C, ambient temperature 32°C
 LT: Evaporation temperature -35°C, ambient temperature 32°C



Condensing unit for commercial refrigeration with reciprocating technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



JEHCCU-CM1/CM3

Medium Temperature Refrigeration					JEHCCU-CM1/CM3				0040 CM1	0050 CM1	0051 CM1	0063 CM1	0067 CM1	0077 CM1	0095 CM1	0100 CM1	0113 CM1	0140 CM1	0140 CM3							
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	0,55 (1)		-		0,83 (1)		0,99 (1)		-		1,20 (1)		1,49 (1)		-							
		R-404A*	Nom	kW	-		0,91 (1)		-		-		1,23 (1)		-		1,50 (1)		1,76 (1)		2,19 (1)		2,22 (1)			
		R-407A	Nom	kW	-		0,72 (1)		-		-		0,97 (1)		-		-		1,19 (1)		1,49 (1)		1,73 (1)		1,74 (1)	
		R-407F	Nom	kW	-		0,78 (1)		-		-		1,03 (1)		-		-		1,26 (1)		1,55 (1)		1,87 (1)		1,88 (1)	
Power input	Medium temperature	R-134a	Nom	kW	0,43 (1)		-		0,54 (1)		0,64 (1)		-		0,74 (1)		0,90 (1)		-							
		R-404A*	Nom	kW	-		0,63 (1)		-		-		0,76 (1)		-		-		0,93 (1)		1,10 (1)		1,18 (1)		1,24 (1)	
		R-407A	Nom	kW	-		0,54 (1)		-		-		0,70 (1)		-		-		0,84 (1)		0,98 (1)		1,11 (1)		1,16 (1)	
		R-407F	Nom	kW	-		0,53 (1)		-		-		0,69 (1)		-		-		0,83 (1)		0,98 (1)		1,07 (1)		1,12 (1)	
Parameters at full load and ambient temp. 25°C		R-134a	Te -10°C	Declared COP (COP2)	1,55		-		1,75		1,80		-		1,96		2,05		-							
		R-404A*	Te -10°C	Declared COP (COP2)	-		1,88		-		-		1,92		-		-		1,87		1,95		1,96		2,02	
		R-407A	Te -10°C	Declared COP (COP2)	-		1,39		-		-		1,45		-		-		1,50		1,65		-		1,58	
		R-407F	Te -10°C	Declared COP (COP2)	-		1,62		-		-		1,66		-		-		1,68		1,78		1,95		1,87	
Parameters at full load and ambient temp. 32°C (Point A)		R-134a	Te -10°C	Rated COP (COPA)	1,28		-		1,53		1,55		-		1,63		1,65		-							
		R-404A*	Te -10°C	Rated COP (COPA)	-		1,45		-		-		1,61		-		-		1,61		1,60		1,68		1,80	
		R-407A	Te -10°C	Rated COP (COPA)	-		1,33		-		-		1,37		-		-		1,42		1,52		1,57		1,50	
		R-407F	Te -10°C	Rated COP (COPA)	-		1,47		-		-		1,49		-		-		1,51		1,58		1,75		1,67	
Parameters at full load and ambient temp. 43°C		R-134a	Te -10°C	Declared COP (COP3)	1,18		-		1,20		1,21		-		1,30		1,32		-							
		R-404A*	Te -10°C	Declared COP (COP3)	-		1,10		-		-		1,18		-		-		1,21		1,20		1,26		1,31	
		R-407A	Te -10°C	Declared COP (COP3)	-		1,16		-		-		-		-		-		-		-		1,38		1,30	
		R-407F	Te -10°C	Declared COP (COP3)	-		1,20		-		-		-		-		-		-		-		1,39		1,32	
Dimensions	Unit	Height	mm		607										662											
		Width	mm		876										1.101											
		Depth	mm		420										444											
Weight	Unit	kg			45		53		54		55		68													
Compressor	Type				Reciprocating compressor																					
	Model				AE4440Y-FZ1A		AE4460Z-FZ1C		CAJ4461Y		CAJ4476Y		CAJ9480Z		CAJ4492Y		CAJ4511Y		CAJ9510Z		CAJ9513Z		CAJ4517Z		TAJ4517Z	
	Oil	Charged volume		l	0,3		0,9														-					
	Oil Type				Uniqema Emkarate RL32CF																					
	Piston displacement	m³/h		1,80		3,18		3,79		2,64		4,51		5,69		3,18		4,21		4,52						
Fan	Type				Axial																					
	Air flow rate	Cooling	Nom	m³/h	1.300												2.700									
Sound pressure level	Nom.	dBA			29 (2)								28 (2)		29 (2)		28 (2)				34 (2)					
Refrigerant	Type				R-134a		R-404A		R-134a		R-404A		R-134a		R-404A											
	Type 2				-		R-407A		-		R-407A		-		R-407A											
	Type 3				-		R-407F		-		R-407F		-		R-407F											
	GWP				1.430,0		3.921,6		1.430,0		3.921,6		1.430,0		3.921,6											
	GWP Type 2				-		2.107		-		2.107		-		2.107											
	GWP Type 3				-		1.825		-		1.825		-		1.825											
Piping connections	Liquid line connection	inch			1/4"								3/8"													
	Suction line connection	inch			3/8"								1/2"								5/8					
Power supply	Phase/Frequency/Voltage				Hz/V		1~/50/230										3~/50/400									

(1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -10°C and 10K superheat (medium temperature application)

(2) Average sound pressure level is measured at 10m in anechoic room

* R-404A refrigerant is not 2020 F-Gas Compliant



Condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



JEHSCU-CM1/CM3

Medium Temperature Refrigeration				JEHSCU-CM1/CM3	0200 CM1	0250 CM1	0300 CM1	0200 CM3	0250 CM3	0300 CM3	0350 CM3	0360 CM3	0400 CM3	0500 CM3	0600 CM3	0680 CM3	0800 CM3	1000 CM3
Refrigerating capacity	Medium temperature	R-134a	Nom	kW	2,05 (1)	2,59 (1)	3,09 (1)	2,17 (1)	2,48 (1)	3,06 (1)	3,48 (1)	3,69 (1)	4,24 (1)	5,24 (1)	6,16 (1)	6,89 (1)	7,95 (1)	10,40 (1)
		R-404A*	Nom	kW	3,54 (1)	3,99 (1)	4,92 (1)	3,49 (1)	4,21 (1)	4,89 (1)	5,50 (1)	5,92 (1)	6,70 (1)	8,03 (1)	9,45 (1)	10,15 (1)	12,95 (1)	16,45 (1)
		R-407A	Nom	kW	3,39 (1)	3,98 (1)	4,65 (1)	3,36 (1)	3,94 (1)	4,54 (1)	-	5,61 (1)	6,57 (1)	8,03 (1)	9,24 (1)	10,35 (1)	12,55 (1)	14,75 (1)
		R-407F	Nom	kW	3,26 (1)	3,73 (1)	4,50 (1)	3,22 (1)	3,85 (1)	4,45 (1)	-	5,61 (1)	6,62 (1)	7,99 (1)	9,36 (1)	10,40 (1)	12,65 (1)	15,95 (1)
Power input	Medium temperature	R-134a	Nom	kW	1,11 (1)	1,21 (1)	1,45 (1)	1,03 (1)	1,17 (1)	1,46 (1)	1,68 (1)	1,61 (1)	1,85 (1)	2,30 (1)	2,70 (1)	3,15 (1)	3,74 (1)	4,86 (1)
		R-404A*	Nom	kW	1,57 (1)	2,00 (1)	2,62 (1)	1,70 (1)	2,04 (1)	2,52 (1)	3,04 (1)	2,88 (1)	3,33 (1)	4,39 (1)	4,92 (1)	5,53 (1)	5,96 (1)	8,62 (1)
		R-407A	Nom	kW	1,60 (1)	1,99 (1)	2,47 (1)	1,63 (1)	2,03 (1)	2,45 (1)	-	2,58 (1)	2,97 (1)	3,93 (1)	4,62 (1)	5,54 (1)	6,24 (1)	8,41 (1)
		R-407F	Nom	kW	1,74 (1)	2,09 (1)	2,66 (1)	1,78 (1)	2,16 (1)	2,71 (1)	-	2,91 (1)	3,21 (1)	4,36 (1)	5,03 (1)	5,98 (1)	6,13 (1)	8,84 (1)
Seasonal energy performance ratio SEPR		R-134a	Te -10°C		-	-	-	-	-	-	-	2,29	-	2,69	2,63	2,57	2,92	2,88
		R-404A*	Te -10°C		-	-	-	-	-	2,61	-	3,48	2,77	2,64	2,72	2,65	2,90	2,57
		R-407A	Te -10°C		-	-	-	-	-	-	-	3,44	3,09	2,81	2,75	2,65	2,88	2,35
		R-407F	Te -10°C		-	-	-	-	-	-	-	3,2	2,83	2,60	2,69	2,59	2,83	2,53
Annual electricity consumption Q		R-134a	Te -10°C	kWh/a	-	-	-	-	-	-	-	-	-	11,969	14,381	16,491	16,741	22,226
		R-404A*	Te -10°C	kWh/a	-	-	-	-	-	12,939	-	10,448	14,881	18,673	21,344	23,536	27,407	39,372
		R-407A	Te -10°C	kWh/a	-	-	-	-	-	-	-	10,033	13,054	17,546	20,622	24,031	26,747	38,515
		R-407F	Te -10°C	kWh/a	-	-	-	-	-	-	-	10,766	14,365	18,883	21,395	24,655	27,475	38,831
Parameters at full load and ambient temp. 25°C		R-134a	Te -10°C	Declared COP (COP2)	2,15	2,54	2,50	2,55	2,52	2,46	2,8	2,83	-	-	-	-	-	-
		R-404A*	Te -10°C	Declared COP (COP2)	2,65	2,54	2,24	2,44	2,41	2,26	-	2,66	-	-	-	-	-	-
		R-407A	Te -10°C	Declared COP (COP2)	2,55	2,38	2,21	2,50	2,32	2,20	-	2,72	-	-	-	-	-	-
		R-407F	Te -10°C	Declared COP (COP2)	2,43	2,31	2,16	2,35	2,25	2,10	-	2,5	-	-	-	-	-	-
Parameters at full load and ambient temp. 32°C (Point A)		R-134a	Te -10°C	Rated COP (COPA)	1,85	2,14	2,13	2,12	2,13	2,10	2,08	2,29	2,29	2,28	2,19	2,13	2,14	-
		R-404A*	Te -10°C	Rated COP (COPA)	2,25	2,00	1,88	2,06	2,07	1,94	1,81	2,06	2,01	1,83	1,92	1,84	2,17	1,91
		R-407A	Te -10°C	Rated COP (COPA)	2,13	2,01	1,89	2,07	1,95	1,86	-	2,17	2,21	2,04	2,00	1,87	2,01	1,75
		R-407F	Te -10°C	Rated COP (COPA)	1,88	1,79	1,69	1,81	1,79	1,65	-	1,93	2,06	1,83	1,86	1,74	2,06	1,80
Parameters at full load and ambient temp. 43°C		R-134a	Te -10°C	Declared COP (COP3)	1,35	1,53	-	1,57	-	1,52	1,6	1,55	1,56	1,59	1,53	-	1,52	-
		R-404A*	Te -10°C	Declared COP (COP3)	1,53	1,33	1,25	1,36	1,28	1,11	1,31	1,28	1,15	1,27	1,22	1,47	1,18	-
		R-407A	Te -10°C	Declared COP (COP3)	-	-	1,48	1,45	1,38	-	1,48	1,43	1,39	1,43	-	1,38	-	-
		R-407F	Te -10°C	Declared COP (COP3)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Dimensions	Unit	Height	mm		662							872			872			1.727
		Width	mm		1.101							1.353			1.353			1.348
		Depth	mm		444							575			575			641
Weight	Unit		kg		70	72	74	70	72	74		112	119	123	125	126		218
Compressor	Type	Scroll compressor																
		Model			ZB15KQE-PFJ	ZB19KQE-PFJ	ZB21KQE-PFJ	ZB15KQE-TFD	ZB19KQE-TFD	ZB21KQE-TFD	ZB26KQE-TFD	ZB26KQE-TFD	ZB29KQE-TFD	ZB38KQE-TFD	ZB45KQE-TFD	ZB48KQE-TFD	ZB58KQE-TFD	ZB76KQE-TFD
		Oil	Charged volume	l	-	-	-	-	-	-	-	1,5	1,36	2,07	1,89	1,80	2,5	3,2
		Oil Type			Polyester oil (Copeland Ultra 22 CC, 32 CC and 32-3MAF, Mobil EAL™ Arctic 22 CC, Uniqem Emkarate RL32CF													
Fan	Type	Piston displacement	m³/h		5,90	6,80	8,60	5,90	6,80	8,60	9,90	9,90	11,40	14,40	17,10	18,80	22,10	29,10
		Air flow rate	Cooling Nom	m³/h				2,700				4,250						8,500
Sound pressure level	Nom.		dBA		33 (2)	34 (2)	36 (2)	33 (2)	34 (2)	36 (2)	39 (2)	37 (2)	37 (2)	38 (2)	40 (2)			43 (2)
Refrigerant	Type	R-134a																
		R-404A																
		R-407A																
		R-407F																
		1.430																
		3.921,6																
		2.107																
		1.825																
Piping connections	Liquid line connection	inch			3/8"							3/4"		1/2"				3/4"
		Suction line connection	inch		3/4"							1/2"		7/8"		1 1/8"		3/8"
Power supply	Phase/Frequency/Voltage		Hz/V		1~/50/230									3~/50/400				

(1) Refer to condition: Outside ambient temperature = 32°C, Evaporation temperature = -10°C and 10K superheat (medium temperature application)

(2) Average sound pressure level is measured at 10m in anechoic room

* R-404A refrigerant is not 2020 F-Gas Compliant

** Also compatible with refrigerants R-448A and R-449A. For more information consult RefrigXpress

Blue cells contain preliminary data



Condensing unit for commercial refrigeration with scroll / reciprocating technology

Refrigeration solution for small food retailers

- › Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets
- › Compact and lightweight for even the smallest of city centre locations
- › All components can be accessed, making maintenance quick and easy
- › Ideal for urban applications: sound proofing and low operating sound levels mean the unit is quiet
- › The optimised compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes
- › Micro channel heat exchanger technology reduces the amount of refrigerant used in the system, lowering environmental impact



JEHCCU/SCU-CL1/CL3

Low Temperature Refrigeration				JEHCCU-CL1/JEHSCU-CL3		JEHCCU0115CL1	JEHSCU0200CL3	JEHSCU0300CL3	JEHSCU0400CL3	JEHSCU0500CL3	JEHSCU0600CL3	JEHSCU0750CL3	JEHSCU0950CL3-EVI
Refrigerating capacity	Low temperature	R-404A*	Nom	kW	0,69 (1)	1,42 (1)	1,98 (1)	2,91 (1)	3,53 (1)	4,13 (1)	5,29 (1)	5,9 (1)	
		R-407A	Nom	kW	-	1,16 (1)	1,51 (1)	2,29 (1)	2,77 (1)	3,31 (1)	4,29 (1)	4,96 (1)	
Power input	Low temperature	R-404A*	Nom	kW	0,72 (1)	1,46 (1)	1,81 (1)	2,38 (1)	3,10 (1)	3,69 (1)	3,88 (1)	4,35 (1)	
		R-407A	Nom	kW	-	1,31 (1)	1,77 (1)	2,33 (1)	2,85 (1)	3,57 (1)	4,17 (1)	3,94 (1)	
Seasonal energy performance ratio SEPR		R-404A*	Te -35°C		-			1,88	1,79	1,80	1,82	1,79	
		R-407A	Te -35°C		-			1,67		1,52	1,51	1,76	
Annual electricity consumption Q		R-404A*	Te -35°C	kWh/a	-			11.555	14.732	17.107	21.649	24.503	
		R-407A	Te -35°C	kWh/a	-			10.212	12.364	16.220	21.146	20.958	
Parameters at full load and ambient temp. 25°C		R-404A*	Te -35°C	Declared COP (COP2)	1,11	1,16	1,40	-					1,58
		R-407A	Te -35°C	Declared COP (COP2)	-	1,12	1,08	-					1,51
Parameters at full load and ambient temp. 32°C (Point A)		R-404A*	Te -35°C	Rated COP (COPA)	0,96	0,97	1,09	1,22	1,14	1,06	1,36	1,36	
		R-407A	Te -35°C	Rated COP (COPA)	-	0,89	0,85	0,98	0,97	0,93	1,03	1,26	
Parameters at full load and ambient temp. 43°C		R-404A*	Te -35°C	Declared COP (COP3)	0,69	0,60	0,70	0,86	0,79	0,64	0,98	1,06	
		R-407A	Te -35°C	Declared COP (COP3)	-	0,55	-	0,67	0,66	0,64	0,73	-	
Dimensions	Unit	Height		mm	607	662		872			1.727	1.727	
		Width		mm	876	1.101		1.353			1.348	1.348	
		Depth		mm	420	444		575			605	605	
Weight	Unit			kg	55	76	77	132		133	203	200	
Compressor	Type				Reciprocating compressor	Scroll compressor							
	Model				CAJ2446Z	ZF06K4E-TFD	ZF09K4E-TFD	ZF13K4E-TFD	ZF15K4E-TFD	ZF18K4E-TFD	ZF25K5E-TFD	ZF18KVE-TFD-EVI	
	Oil	Charged volume		l	0,9	-		1,90					1,90
	Oil Type				Uniqema Emkarate RL32CF	Polyester oil (Copeland Ultra 22 CC, 32 CC and 32-3MAF, Mobil EAL™ Arctic 22 CC, Uniqema Emkarate RL32CF							
	Piston displacement			m³/h	4,55	5,90	8,00	11,80	14,50	17,10	21,40	17,1	
Fan	Type				Axial								
	Air flow rate	Cooling	Nom	m³/h	1.300	2.700		-			5.750	5.870	
Sound pressure level	Nom.			dBA	31 (2)	32 (2)	33 (2)	37 (2)	39 (2)	41 (2)		37	
Refrigerant	Type				R-404A								
	Type 2				-	R-407A							
	GWP				3.921,6								
	GWP Type 2				-	2.107,0							
Piping connections	Liquid line connection			inch	3/8"			1/2"				7/8"	
	Suction line connection			inch	1/2"	3/4"		7/8"			1 1/8"	1/2"	
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230				3~/50/400				

(1) SRG 20°C, Ta=32°C, Te=-35°C (2) Average sound pressure level is measured at 10m in anechoic room

* R-404A refrigerant is not 2020 F-Gas Compliant

Blue cells contain preliminary data

Condensing unit for outdoor installation with hermetic compressors

General features:

- › Capacity for MT cooling: 0,9 kW to 26,7 kW
- › Capacity for LT cooling: 0,6 kW to 12 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F, depending on the compressor
- › Tecumseh, Maneurop, Copeland scroll
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

General Description:

Compact air cooled condensing unit floor mounting, low noise, with hermetic compressors. Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets. All components can be accessed, allowing for quick and easy maintenance. The optimized compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes.



Standard characteristics:

- › Hermetic compressor with integral protection
- › Dual HP/LP fixed switch with auto reset
- › Liquid line filter dryer, liquid line sight glass
- › Curved condenser with 6-pole fan motor
- › Liquid receiver with safety pressure relief valve for PED units (depending on the model & PED class)
- › Electrical box with capacity controller (only for digital scroll)
- › Crankcase heater (only scroll type)

Normal cooling

Condensing unit			GCU-E	1006U01	107U01	1010U01	1012U01	1015U01	2025U01	2028U01	2035U01	2040U01E
Refrigeration capacity	0° C	W	1.428	1.704	2.097	2.470	3.162	5.186	6.102	7.350	7.557	
	-10° C	W	974	1.177	1.498	1.710	2.075	3.013	3.848	4.628	5.173	
Power input		kW	0,61	0,7	0,83	0,88	1,2	1,53	1,82	2,17	2,67	
COP 32°C ⁽¹⁾				1,59	1,67	1,8	1,93	1,72	1,96	2,11	2,13	1,94
COP 25°C ⁽¹⁾				1,84	1,93	2,07	2,23	1,98	2,23	2,4	2,42	2,2
COP 43°C ⁽¹⁾				1,23	1,31	1,5	1,53	1,35	1,55	1,66	1,68	1,55
 SEPR ⁽¹⁾				-	-	-	-	-	-	-	-	2,4
Annual Electricity Consumption ⁽¹⁾		Kwh/a	-	-	-	-	-	-	-	-	-	13.257
Dimensions Unit	Height	mm	625	625	625	625	625	800	800	800	800	800
	Width	mm	1150	1150	1150	1150	1150	1400	1400	1400	1400	1400
	Depth	mm	500	500	500	500	500	550	550	550	550	550
Condenser air flow		m³/h	1.840	1.840	1.840	1.830	1.830	3.600	3.600	3.600	3.600	3.370
Compressor			Tecumseh reciprocating hermetic compressor									
Refrigerant		Type/GWP	R-134A/1430									
Power supply		V/~ / Hz	230/1~/50					400/3~/50				

Deep freezing

Condensing unit			HCU-D	1010U01	1012U01	1015U01	1017U01	1020U01	2025U01	2035U01	
Refrigeration capacity	-25° C	W	673	778	1.058	1.323	1.790	2.597	(2)		
	-35° C	W	377	449	626	802	1.021	1.481	(2)		
Power input		kW	0,45	0,53	0,62	0,85	1,2	1,41	(2)		
COP 32°C ⁽¹⁾			0,83	0,85	1	0,94	0,85	1,05	(2)		
COP 25°C ⁽¹⁾			0,98	0,99	1,16	1,09	1	1,22	(2)		
COP 43°C ⁽¹⁾			0,62	0,64	0,76	0,73	0,59	0,79	(2)		
SEPR ⁽¹⁾				-	-	-	-	-	-		
Annual Electricity Consumption ⁽¹⁾			Kwh/a	-	-	-	-	-	-		
Dimensions	Unit	Height	mm	625	625	625	625	625	800	800	
		Width	mm	1150	1150	1150	1150	1150	1400	1400	
		Depth	mm	500	500	500	500	500	550	550	
Condenser air flow			m³/h	1.840	1.840	1.840	1.840	1.830	3.600	(2)	
Compressor			Tecumseh reciprocating hermetic compressor								
Refrigerant			Type/GWP	R-452A/2141							
Power supply			V/~ / Hz	230/1~/50					400/3~/50		

Other refrigerants, compressors and options available on request (1) Nominal operating conditions according to Ecodesign EN 13215: Ambient temperature 32°C/25°C/43°C, Evaporation temperature -10°C -35°C, 20°C suction gas temperature, Sub cooling 0K; (2) Not existing at the moment

Condensing unit for outdoor installation with semi hermetic compressors

General features:

- › Capacity for MT cooling: 1,37 kW to 72,3 kW
- › Capacity for LT cooling: 0,77 kW to 35,2 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F, R 407A
- › Reciprocating: Bitzer, Dorin, Frascold
- › Copeland Digital scroll and Stream reciprocation compressors
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

General Description:

Compact air cooled condensing unit floor mounting, low noise, with semi hermetic compressors. Designed specifically for small capacity refrigeration applications in small and medium sized food stores (e.g. in bakeries and butchers), cold rooms, bottle coolers and display cabinets. All components can be accessed, allowing for quick and easy maintenance. The optimized compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes.



Standard characteristics:

- › Semi-hermetic compressors
- › Crankcase heater - Kriwan
- › Curved condenser with 6-pole fan motor
- › Electrical box with terminal strip
- › Liquid receiver with safety pressure relief valve for PED units
- › Liquid line filter dryer, liquid line sight glass
- › Dual HP/LP adjustable switch with auto reset
- › Suction vibration eliminator
- › Frequency driver (only with Inverter option)
- › Bitzer Varispeed compressor (only for Inverter option)
- › Electrical box with running processor (only for Inverter)

Normal cooling

Condensing unit			GCU-E	1010B01	1015B01	2020B01	2022B01	2025B01	2030B01	2040B01	3050B01	3060B01	4090B01
Refrigeration capacity	0° C	W	2.786	3.189	4.248	5.133	5.943	7.334	9.596	1.1711	13.899	17.574	
	-10° C	W	1.929	2.335	2.957	3.550	4.161	5.155	6.897	8.270	9.885	12.520	
Power input		kW	0,98	1,15	1,5	1,5	1,5	2,15	2,87	3,4	4,2	5	
COP 32°C ⁽¹⁾			2,14	2,09	2,36	2,43	2,35	2,4	2,39	2,42	2,35	2,48	
COP 25°C ⁽¹⁾			2,51	2,43	2,83	2,84	2,75	2,8	2,81	2,83	2,74	2,89	
COP 43°C ⁽¹⁾			1,66	1,66	1,81	1,92	1,86	1,89	1,87	1,9	1,85	1,94	
 SEPR ⁽¹⁾			-	-	-	-	-	3,37	3,39	3,32	3014	3,38	
Annual Electricity Consumption ⁽¹⁾		Kwh/a	-	-	-	-	-	9.407	12.520	15.180	19.331	22.788	
Dimensions	Unit	Height	mm	625	625	800	800	800	800	800	1480	1480	1480
		Width	mm	1150	1150	1400	1400	1400	1400	1400	1400	1400	1680
		Depth	mm	500	500	550	550	550	550	550	550	550	750
Condenser air flow		m³/h	1.830	1.830	3.600	3.600	3.370	3.050	3.050	6.740	6.740	6.740	
Compressor			Bitzer reciprocating compressor										
Refrigerant		Type/GWP	R-134a/1430										
Power supply		V/~ / Hz	400/3~/50										

Deep freezing

Condensing unit			HCU-B	1007B01	1010B01	1015B01	1020B01	2020B01	2030B01	2050B01	3060B01	4090B01	4120B01
Refrigeration capacity	-25° C	W	971	1.193	1.562	1.875	3.099	4.025	5.657	7.563	8.823	9.358	
	-35° C	W	536	690	886	1.097	1.854	2.478	3.497	4.677	5.394	5.641	
Power input		kW	0.54	0.68	0.8	1	1.39	1.88	2.62	3.47	3.81	3.92	
COP 32°C ⁽¹⁾			0,98	1,02	1,09	1,1	1,33	1,32	1,33	1,35	1,42	1,44	
COP 25°C ⁽¹⁾			1,15	1,2	1,27	1,29	1,53	1,52	1,53	1,55	1,61	1,62	
COP 43°C ⁽¹⁾			0,68	0,68	0,75	0,74	1,05	1,04	1,07	1,07	1,16	1,04	
 SEPR ⁽¹⁾			-	-	-	-	-	1,73	1,75	1,8	1,83	1,79	
Annual Electricity Consumption ⁽¹⁾		Kwh/a	-	-	-	-	-	10.695	14.882	19.427	21.964	23.562	
Dimensions	Unit	Height	mm	625	625	625	625	800	800	800	1480	1480	1480
		Width	mm	1150	1150	1150	1150	1400	1400	1400	1400	1680	1680
		Depth	mm	500	500	500	500	550	550	550	750	750	
Condenser air flow		m³/h	1.830	1.830	1.830	1.830	3.600	3.600	3.050	7.200	6.740	6.740	
Compressor			Bitzer reciprocating compressor										
Refrigerant		Type/GWP	R-449A/1397										
Power supply		V/~ / Hz	400/3~/50										

Other refrigerants, compressors and options available on request (1) Nominal operating conditions according to Ecodesign EN 13215: Ambient temperature 32°C/25°C/43°C, Evaporation temperature -10°C -35°C, 20°C suction gas temperature, Sub cooling 0K

Twin condensing unit for outdoor installation with twin-semi hermetic compressors

General features:

- › Capacity for MT cooling: 8,5 kW to 26 kW
- › Capacity for LT cooling: 7,5 kW to 12 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F
- › Reciprocating: Bitzer, Dorin, Frascold
- › Copeland Digital scroll and Stream reciprocation compressors
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

General Description:

Compact air cooled condensing unit floor mounting, low noise, with hermetic compressors. Designed specifically for small capacity refrigeration applications in small food stores (eg. in bakeries and butchers), cold rooms, bottle coolers and display cabinets. All components can be accessed, making maintenance quick and easy. The optimized compressor range and increased condenser surface deliver high levels of energy efficiency and reliability is ensured by using high quality components and production processes.



Standard characteristics:

- › Two compressors parallel connected
- › Level control oil system
- › Curved condenser with 6-pole fan motor
- › Electrical box with terminal strip
- › Liquid receiver with safety pressure relief valve for PED units
- › Liquid line filter dryer, liquid line sight glass
- › Dual HP/LP adjustable switch with auto reset
- › Suction vibration eliminator
- › Electrical box with Running processor (only for Inverter)

Normal cooling

Condensing unit	GCU-E	4040L01	4060L01	4080L01	5120L01	5140L01	5180L01
Refrigeration capacity	0° C W	11.900	15.200	19.200	27.800	30.400	36.400
	-10° C W	8.328	10.596	13.800	19.783	21.249	25.694
Power input	kW	3,53	4,4	5,7	8,42	8,3	10
COP/EER ⁽¹⁾		2,4	2,4	2,4	2,3	2,6	2,6
SEPR ⁽¹⁾		3,52	3,6	3,71	3,55	3,75	3,8
Annual Electricity Consumption ⁽¹⁾	Kwh/a	14.526	18.098	22.905	24.299	34.808	41.562
Dimensions	Unit	Height mm	1480	1480	1480	1480	1480
	Width mm	1680	1680	1680	2405	2405	2405
	Depth mm	750	750	750	750	750	750
Condenser air flow	m³/h	7.800	7.800	7.300	15.600	15.600	14.600
Compressor		Bitzer reciprocating compressor					
Refrigerant	Type/GWP	R-134A/1430					
Power supply	V/~ / Hz	400/3~/50					

Deep freezing

Condensing unit	HCU-J	4080L01	4100L01	412L01
Refrigeration capacity	-25° C W	9.400	11.100	13.600
	-35° C W	5.732	6.725	8.904
Power input	kW	4,5	5,3	6,7
COP/EER ⁽¹⁾		1,3	1,3	1,3
SEPR ⁽¹⁾		1,78	1,8	1,83
Annual Electricity Consumption ⁽¹⁾	Kwh/a	23.949	27.806	36.214
Dimensions	Unit	Height mm	1480	1480
	Width mm	1680	1680	1680
	Depth mm	750	750	750
Condenser air flow	m³/h	7.600	7.900	7.300
Refrigerant	Type/GWP	R 407F/1825		
Power supply	V/~ / Hz	400/3~/50		

Other refrigerants, compressors and options available on request. (1) Nominal operating conditions according to Ecodesign EN 13215: Ambient temperature 32°C, Evaporation temperature -10°C/ -35°C, 20°C suction gas temperature, Sub cooling 0K

Multi compressor condensing unit with scroll/digital scroll compressors

General features:

- › Capacity for MT cooling: 10,5 kW to 102 kW
- › Capacity for LT cooling: 7,5 kW to 48,5 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F
- › Copeland scroll and digital scroll compressors
Other types, brands and capacities are possible on request
- › Conditions:
MT: Ambient temperature: 35°C Evp. Temperature: -10°C
LT: Ambient temperature: 35°C Evp. Temperature: -35°C

Standard configuration:

Basic Frame Version:

Basic frame made from pre-painted steel sheet, with vertical condenser placed on 1 or 2 sides of the unit and fans (2, 3, 4, or 5) placed on frame top covering sheet.

The compressors are installed in a soundproof compartment separate from the condenser side, but allowing ventilation.

The compartment is simple soundproofing insulated (SMP).

Basic Refrigerating System:

The compressors (3 or 4) are connected in parallel, with one suction and discharge header. Each compressor is fitted with shut-off valves on suction line and discharge line.

The compressors are fixed to the frame through rubber anti-vibration supports.

The oil equalization system is composed of an oil separator and an equalization header, which are mounted on the compressor oil sight glass connection.

According to the number of compressors fitted, there are one or two oil level indicator/s, fitted onto the equalization header.

The refrigerating system is equipped with liquid receivers, if there is more than one receiver, the installation is made in parallel with a safety valve, a dehydration cartridge filter, interchangeable, liquid level alarm, liquid sight glass and shut-off valves.

On suction line there is a mechanical cartridge filter, interchangeable.



The refrigeration system is fitted with:

- › General high pressure switch, adjustable and autoresetting
- › General low pressure switch, adjustable and autoresetting
- › Emergency low pressure switch, adjustable and autoresetting
- › Low pressure switches for each compressor emergency, adjustable and autoresetting
- › Low pressure probe, placed on suction header for capacity control
- › High pressure gauge
- › Low pressure gauge

Standard electrical panel:

Standard power distribution

Disconnecting switch

Compressors protection, with overload cut-out motor protector; fuses for fans protection, thermo- contacts for each single fan.

Auxiliary circuit 230 volt through transformer 400V/230V

Electronic card XC440C

Four alarm signals: emergency (button + lamp, fans block, high pressure switch block, low pressure switch block).

Electronic speed regulator for condenser fan with pressure probe for three phase fans and with temperature probe for mono phase fans + bypass

The electrical panel is placed horizontally on the top front side of the unit, inside the panel sheets for frame 1, 2 and 3; greed, ventilation fan and double door for frames 4, 5, 6 and 7.

Multi compressor condensing unit with semi hermetic compressors

General features:

- › Capacity for MT cooling: 48 kW to 150 kW
- › Capacity for LT cooling: 20 kW to 85 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F
- › Reciprocating semi hermetic compressors: Bitzer, Dorin, Frascold, Copeland stream
- Other types, brands and capacities are possible on request
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

General description:

Basic Frame Version:

Basic frame made from folded and painted steel sheet, screwed with bolts to make a basic structure to fix the components on it.

Basic Refrigerating System:

The compressors (3 or 4) are connected in parallel, with only one suction and discharge header. Each compressor is fitted with shut-off valves on suction line and discharge line.

The compressors are fixed to the frame through rubber anti-vibration supports.

Compressors used for low temperature are complete with fan heads.

The oil equalization system is composed of an oil separator and an equalization header, which are mounted on the compressor oil sight glass connection.

According to the number of compressors fitted, there is one or two oil level indicator/s, fitted onto the equalization header.

The refrigerating system is equipped with liquid receivers, if there is more than one receiver, the installation is made in parallel with a safety valve, a dehydration cartridge filter, interchangeable, liquid level alarm, liquid sight glass and shut-off valves.

On suction line there is a mechanical cartridge filter, interchangeable.



CM Semi hermetic

The refrigeration system is fitted with:

- › General high pressure switch, adjustable and autoresetting
- › General low pressure switch, adjustable and autoresetting
- › Oil pressure switch for each compressor
- › Emergency low pressure switch, adjustable and autoresetting
- › Low pressure switches for each compressor emergency, adjustable and autoresetting
- › Electronic speed regulator for condenser fan with pressure probe for three phase fans and with temperature probe for mono phase fans + bypass
- › Low pressure probe, placed on suction header for capacity control
- › High pressure gauge
- › Low pressure gauge

Electrical panel:

Standard power distribution

Disconnecting switch

Compressors protection, with overload cut-out motor protector; fuses for fans protection, thermos contacts for each single fan

Auxiliary circuit 230 volt through transformer 400V/230V

Electronic card XC440C

IP55 with greed and ventilation fan

On the door there is the electronic card and 4 lamps: emergency (button + lamp), fans block, high pressure switch block, low pressure

Switch block, and selector for on/off compressors



ZEAS condensing unit for medium and low temperature refrigeration

Why choose ZEAS?

Whether it is restaurants, supermarkets or event halls – Zeas from Daikin is as individual as the requirements of the industries where it is used.

High energy efficiency

- › Daikin DC inverter scroll compressor with economizer technology
- › DC inverter fan technology
- › Eco-design compliant

Reliable operation

- › Zeas condensing units are rigorously tested on the assembly line
- › Proven inverter scroll technology
- › Proven onboard innovating economizer technology
- › Anti-corrosion treatment on the housing ensures long life even in extreme conditions

BENEFITS

- › **Lower energy bills**
The use of Daikin proven DC technology results in lower energy bill compared to the use of standard ON/OFF units and even other capacity controller refrigeration units
- › **Our units are future proof**
Combining Daikin innovating economizer technology with in house DC technology results in very high efficient units allowing us to outperformed the most severe eco-design minimum performance for the coming decades

BENEFITS

- › **Optimal food conservation**
Accurate temperature and humidity control can be easily suited to the requirements for different foods and beverages resulting in less of precious products
- › **Longer lifetime expectation of our compressor**
Less thermal stress on our bearings and motor windings due to the implementation of Daikin High quality DC technology in our compressor
- › **Longer lifetime expectations of our units**
The use of our innovating economizer technology in our units guarantee that our the compressor always operates within his operating envelop even in the most harvest conditions: excessive superheat at the inlet of the compressor resulting from improper quality of installation on the refrigerated cabinets side
- › **No leaks**
Each new Daikin designed unit is put on a vibration plate in the factory to be sure that no leak and component damage can occur during transport. Even further, in the assemble line the Zeas unit undergo several leak test
- › **No "dead on arrival"**
ALL units leaving the factory, have already run at the end of the assembly line
- › **Lower installation cost**
Due to the use of the onboard economizer technology and the use of the correct low GWP refrigerant we only required the use of smaller pipes compared to other traditional systems, thus also lowered the refrigerant charge of the system



Small foot print and low weight

- › Extremely compact and space-saving design
- › Easy to install, even in the smallest spaces
- › Indoor installation possible
- › Best surface to capacity ration on the market
- › Low weight thanks to compact design

Peace of mind

- › Quiet operation, unobtrusive for customers and neighbours
 - High grade sound on panels and compressors
 - Condenser fans designed to limit the noise
 - 4 low noise operation settings including night mode
- › Wide temperature range allows multiple cabinet, freezer and cold room combinations

Intelligent control

- › Unit can be connected to third party monitoring system
- › Remote control of target evaporation temperature, reset errors and other functions
- › Refrigeration unit can be controlled remotely through a power full interface

BENEFITS

- › **Only light weight supporting structures are required**
- › **No installation restrictions anymore**
Our mini Zeas due to his compact design, light weight and very silent operation can be installed everywhere!
- › **No special crane are required**
The ZEAS units are so compact that it can fit in an elevator


BENEFITS

- › **Happy neighbours and no installation restrictions anymore**
The focus on sound criteria during the design of the units results in the most silent unit(s) of the market (till 25 dB(A) @ 10 m free field conditions)

BENEFITS

- › **Quick installation and commissioning**
Advanced software solution for easy system configuration and commissioning
- › **Peace of mind**
Easy monitoring of ZEAS unit by third party Building Management Systems through the use of our Modbus interface

ZEAS, the smart choice for medium and low temperature refrigeration

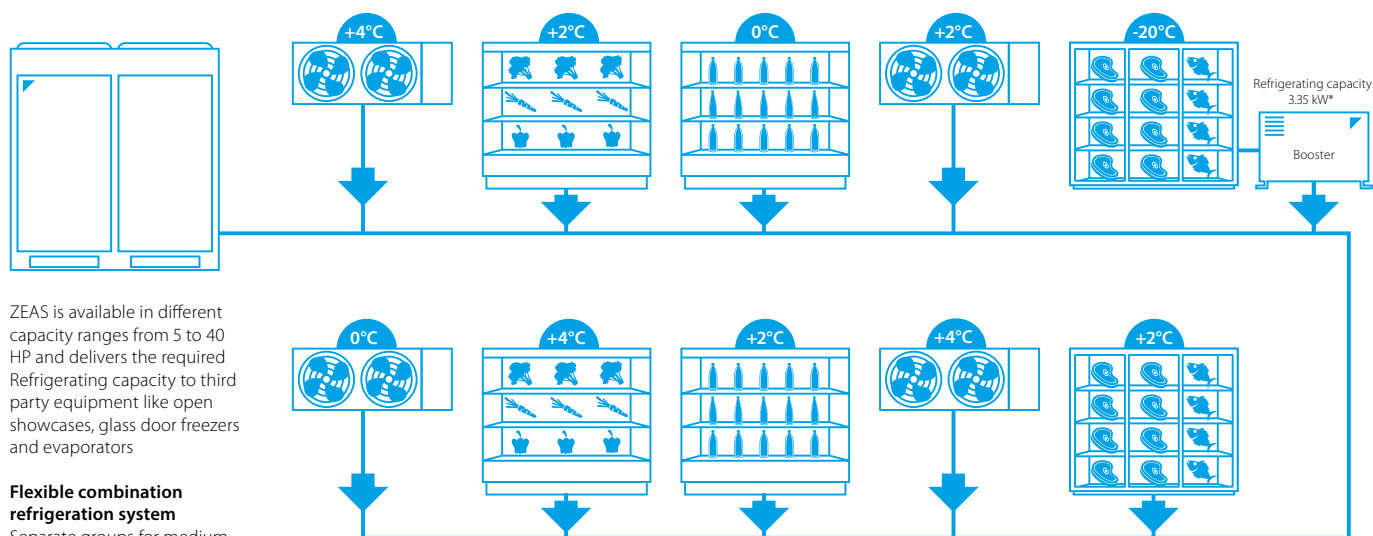

ZEAS is available in different capacity ranges from 5 to 40 HP and delivers the required Refrigerating capacity to third party equipment like open showcases, glass door freezers and evaporators

Flexible combination refrigeration system

Separate groups for medium and low temperature cooling, each with multiple cabinets and different temperatures. This flexibility and energy savings of up to 50% are only possible with ZEAS-systems.

Operating range

Ambient temperatures: -20°C to +43 °C
Evaporating temperatures: -45°C to +10°C


* Te = -35°C, Tc = -10°C, 10 K SH, Tamb = 32°C

* Only Zeas. Not applicable for Mini-Zeas and Multi-Zeas

Why R410A?

R410A is a lower GWP refrigerant (less than 2500) than R404A and is fully F-gas compliant. It's future proof: it can be used even after 2030!


Use of refrigerant in refrigeration system with a refrigeration lower than 40 kW

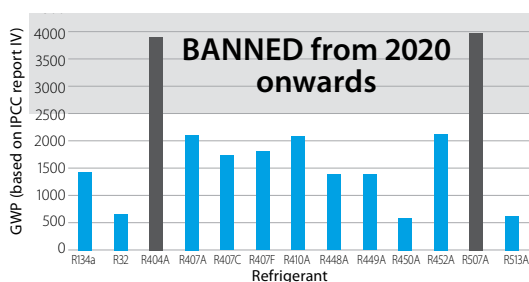

Contributes to reducing installation cost and refrigerant charge

R410A is a high pressure refrigerant which for the same swept volume can deliver much more refrigeration capacity than standard mid pressure and low pressure refrigerants.

Delivered capacity per used refrigerant

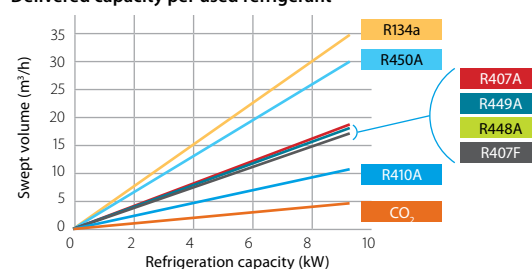


This means that for the same delivered refrigeration capacity we can use smaller main and line components, thus reducing the installation cost and the amount of refrigerant charge in the system!

For a capacity of 8,4 kW (Te = -10°C / Tamb = 32°C)

Refrigerant	Suction piping diameter
R134a	1 1/8"
R407A	7/8"
R407F	7/8"
R448A	7/8"
R449A	7/8"
R450A	1 1/4"
R410A	3/4"
CO2	1/2"

Refrigerant charge per used refrigerant (Te = -10°C / Tamb = 32°C)



R410A is also:

- › an easy to handle, common used refrigerant in the air conditioning world, therefore it is easy to find an installer which can work with this refrigerant, compared to CO₂, Ammonia and Propane.
- › an A1 refrigerant, therefore no special safety measurements are required.

Mini-ZEAS condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for small food retailers

- › Inverter technology guarantees optimal food conservation by ensuring an accurate temperature and humidity control
- › The economized scroll contributes to a longer lifetime expectation of the refrigeration equipment and less maintenance requirement
- › The use of R-410A refrigerant allows the use of smaller piping diameters, thus reducing the refrigerant content in the system helping to lower our CO2 footprint . R-410A is fully compliant with the latest F-Gas regulation and can be still used after 2020 and beyond
- › The DC economized compressor improves drastically the efficiency of the unit, thus helps lowering the energy bill!
- › Lowest sound level in the market down to 31 dBA. Sound level can be even further reduced thanks to the low noise modes
- › The weight of the unit is very low, therefore the unit can even be mounted on the wall
- › Up to 75% smaller than equivalent products in the market, ideal for those places where space is limited
- › Advanced software solution for easy system configuration and commissioning



LRMEQ-BY1



Daikin technology increases the love for German Gourmet

DAIKIN's new Mini-ZEAS condensing unit is ensuring constant refrigeration in storage and production areas at the newly refurbished butcher shop, in mid west Germany. The key to maintaining the quality of the shop's fresh meat and deli products is to store them at constant temperatures, which is also legislatively required to be quality controlled at all times. DAIKIN's new Mini-ZEAS condensing unit, which is specially designed for small-scale commercial refrigeration applications, ensures exactly that. **Fleischeslust, Bensheim, Germany.**

Medium Temperature Refrigeration		LRMEQ-BY1	3	4
Connectable capacity	Minimum~Maximum	%	50~100	
Refrigerating capacity	Medium temp. Nom.	kW	5.90 (1)	8.40 (1)
Power input	Medium temp. Nom.	kW	2.53 (1)	3.65 (1)
COP	Medium temp. Nom.		2.33 (1)	2.30 (1)
Seasonal energy performance ratio SEPR	R-410A Te -10°C		4.17	4.08
Annual electricity consumption Q	R-410A Te -10°C	kWh/a	8,698	12,651
Parameters at full load and ambient temp. 32°C (Point A)	R-410A Te -10°C	Rated COP (COP _A)	2.33	2.30
Parameters at full load and ambient temp. 43°C	R-410A Te -10°C	Declared COP (COP ₃)	1.51	1.48
Dimensions	Unit HeightxWidthxDepth	mm	1,345x900x320	
Weight	Unit	kg	126	
Heat exchanger	Type		Cross fin coil	
Compressor	Type		Hermetically sealed scroll compressor	
	Starting method		Direct on line (inverter driven)	
Fan	Type		Propeller	
	Quantity		2	
	Air flow rate	Cooling Nom. m ³ /min	106	
Fan motor	Output	W	70	
	Drive		Direct drive	
Sound pressure level	Nom.	dBA	51 (2)	
Piping connections	Liquid OD	mm	9,52	
	Gas OD	mm	19.1	
Refrigerant	Type/GWP		R-410A/2,087.5	
	Charge	kg/TCO ₂ Eq	4.50/9.39	
	Control		Electronic expansion valve	
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50/380-415	

(1)Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C

(2)Sound pressure data: measured at 1m in front of unit, at 1.5m height



ZEAS condensing unit for commercial refrigeration with scroll technology

Refrigeration solution for medium to large capacity applications featuring proven VRV technology



- › One model for all applications from -45°C to 10°C evaporating temperature
- › Perfect solution for all cooling and freezing applications with variable load conditions and high energy efficiency requirements. In particular used in supermarkets, cold storage, blast coolers and freezers etc.
- › DC inverter scroll compressor with economiser function results in high energy efficiency and reliable performance
- › Reduced CO₂ emissions thanks to the use of R-410A refrigerant and low energy consumption
- › Factory tested and pre-programmed for quick and easy installation and commissioning
- › VRV (Variable Refrigerant Volume) technology for flexible application range
- › Increased installation flexibility thanks to limited dimensions
- › Low sound level including „night mode“ operation
- › For small freezing capacity, single ZEAS units can be connected to a booster unit
- › Dedicated unit to allow multi combination of 2 x 15 HP or 2 x 20 HP resulting in less pipework or installation time



LREQ-BY1				5	6	8	10	12	15	20
Refrigerating capacity	Low temperature	Nom.	kW	5,51 (1)	6,51 (1)	8,33 (1)	10,0 (1)	10,7 (1)	13,9 (1)	15,4 (1)
	Medium temperature	Nom.	kW	12,5 (2)	15,2 (2)	19,8 (2)	23,8 (2)	26,5 (2)	33,9 (2)	37,9 (2)
Power input	Low temperature	Nom.	kW	4,65 (1)	5,88 (1)	7,72 (1)	9,27 (1)	9,89 (1)	12,8 (1)	14,1 (1)
	Medium temperature	Nom.	kW	5,10 (2)	6,56 (2)	8,76 (2)	10,6 (2)	12,0 (2)	15,2 (2)	17,0 (2)
Seasonal energy performance ratio SEPR	 R-410A	Te -10°C		3,86	3,79	3,64	3,42	3,51	3,38	3,23
		Te -35°C		1,80	1,77	1,84	1,88	1,80	1,70	1,70
Annual electricity consumption Q	 R-410A	Te -10°C	kWh/a	19.907	24.681	33.483	42.794	46.377	61.683	72.030
		Te -35°C	kWh/a	22.805	27.453	33.817	39.747	44.363	61.090	67.325
Parameters at full load and ambient temp. 32°C (Point A)	 R-410A	Te -10°C	Rated COP (COPA)	2,45	2,32	2,26	2,25	2,21	2,23	
		Te -35°C	Rated COP (COPA)	1,18	1,11		1,08		1,09	
Parameters at full load and ambient temp. 43°C	 R-410A	Te -10°C	Declared COP (COP3)	1,54	1,57	1,40	1,46	1,47	1,46	1,51
		Te -35°C	Declared COP (COP3)	0,76	0,74	0,68	0,70	0,71		0,74
Dimensions	Unit	Height	mm				1.680			
		Width	mm	635			930		1.240	
		Depth	mm				765			
Weight	Unit		kg	166			242		331	337
Heat exchanger	Type			Cross fin coil						
Compressor	Type			Hermetically sealed scroll compressor						
	Output		W	2.600	3.200	2.100	3.000	3.400	2.600	3.400
	Piston displacement		m³/h	11,18	13,85	19,68	23,36	25,27	32,24	35,8
	Speed		rpm	5.280	6.540	4.320	6.060	6.960	5.280	6.960
	Starting method			Direct on line (inverter driven)						
Compressor 2	Output		W	-			3.600			
	Speed		rpm	-			2.900			
Compressor 3	Output		W	-					3.600	
	Speed		rpm	-					2.900	
Fan	Type			Propeller fan						
	Quantity			1					2	
	Air flow rate	Cooling	Nom.	m³/min	95	102	171	179	191	230
Fan motor	Output		W	350			750		350	750
	Drive			Direct drive						
Fan motor 2	Output		W	-					350	750
Sound pressure level	Nom.		dBA	55,0 (3)	56,0 (3)	57,0 (3)	59,0 (3)	61,0 (3)	62,0 (3)	63,0 (3)
Operation range	Evaporator	Cooling	Max.-Min.	°CDB	10~45					
Refrigerant	Type / GWP			R-410A / 2.087,5						
	Charge		kg	5,2			7,9		11,5	
			TCO ₂ eq	10,9			16,5		24,0	
	Control				Electronic expansion valve					
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50/380-415						
LREQ-BY1				30				40		
System	Outdoor unit module 1			LREQ15BY1R				LREQ20BY1R		
	Outdoor unit module 2			LREQ15BY1R				LREQ20BY1R		
Refrigerating capacity	Medium temperature	Nom.	kW	67,8 (1)				75,8 (1)		
	Low temperature	Nom.	kW	27,8				29,6		
Power input	Medium temperature	Nom.	kW	30,4				34,0		
	Low temperature	Nom.	kW	25,6				27,6		
Sound pressure level	Nom.		dBA	65,0				66,0		
Piping connections	Liquid			ø 19,05						
	Gas			ø 41,28						

(1) Cooling: evaporating temp. -10°C; outdoor temp. 32°C; suction SH10°C (2) Cooling: evaporating temp. -35°C; outdoor temp. 32°C; suction SH10°C (3) Sound pressure data: measured at 1m in front of unit, at 1.5m height | RLA is based on following conditions: outdoor temp. 32°CDB; suction SH 10°C; saturated temperature equivalent to suction pressure -10°C

1	Gas pipe connection Ø19.1 brazing
2	Liquid pipe connection Ø9.5 brazing
3	(2X) Service port (in the unit)
4	Electronic connection and grounding terminal M5 (in the switch box)
5	Refrigerant piping intake
6	Power supply and output signal wiring intake (knockout hole Ø34)
7	Control wiring intake (knockout hole Ø27)
8	Drain outlet

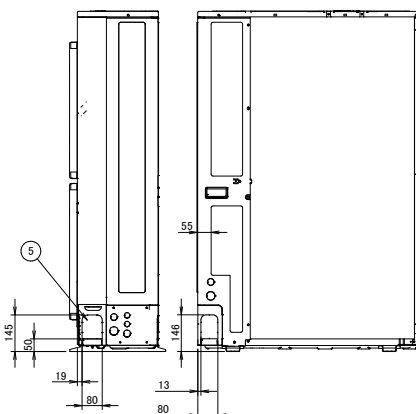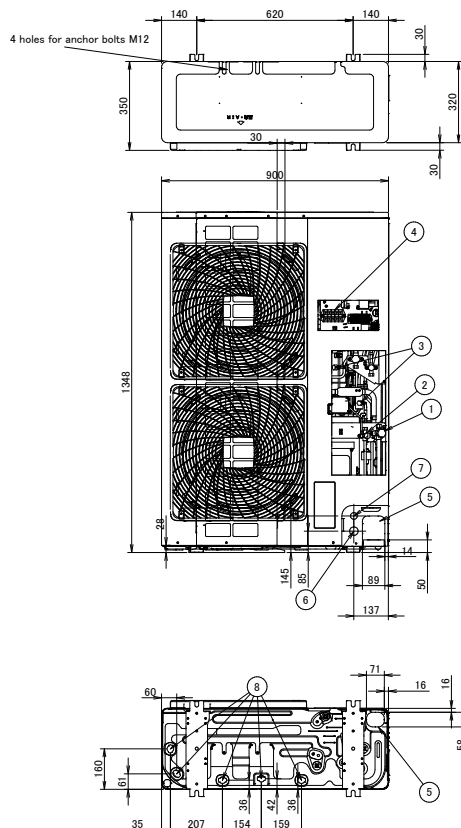

3D111429

Technical drawings of the E-13000 Series 1000mm High Server Cabinet, showing front, side, and detail views.

Front View: Shows the cabinet's dimensions: 497mm width, 1550mm height, and 668mm depth. It features 10 horizontal doors and a top handle. Callouts 1 through 10 indicate specific components and knock-out holes.

Side View: Shows the cabinet's dimensions: 1550mm height, 67mm width, and 765mm depth. Callouts 1 through 10 indicate specific components and knock-out holes.

Detail for front side: Shows the front side detail with dimensions: 101mm, 104mm, 115mm, 118mm, 163mm, 208mm, and 27mm. Callouts 1 through 10 indicate specific components and knock-out holes.

Detail for bottom side: Shows the bottom side detail with dimensions: 54mm, 115mm, 155mm, 48mm, 12mm, and 10mm. Callouts 1 through 10 indicate specific components and knock-out holes.

Foundation Bolt Holes: Shows the foundation bolt holes with dimensions: 4-13 x 22, 5-rn-Oblong Holes, (Pitch of foundation bolt holes), and (Foundation bolt holes).

MODEL
LREQ5, 6BY1

3D076985

No.	Parts name	Remarks
1	Liquid pipe connection port	ø 9.5
2	Gas pipe connection port	ø 22.2
3	Earth terminal	Inside of electric component box (M8)
4	Power cord routing hole (side)	ø 62
5	Power cord routing hole (front)	ø 45
6	Power cord routing hole (front)	ø 27
7	Power cord routing hole (bottom)	ø 50
8	Wire routing hole (front)	ø 27
9	Pipe routing hole (front)	
10	Pipe routing hole (bottom)	

1. Detail for front side and detail for bottom side indicate the dimensions after fixing the attached piping.
2. "※" is a size in the state where accessory piping is connected.

Technical drawings of the outdoor unit showing front, side, and bottom views with dimensions and callouts.

Top View: Shows the base of the unit with dimensions 792 (width) and 1157 (depth). It includes labels for "Pitch of foundation bolt holes" and "Oblong Holes (Foundation bolt holes)".

Front View: Shows the front of the unit with dimensions 1480 (height) and 732 (width). Callouts include 4 (top panel), 5 (bottom panel), 6 (Knock-out hole), 7 (Knock-out hole), and 8 (Knock-out hole).

Side View: Shows the side of the unit with dimensions 1510 (height) and 765 (width). Callouts include 4 (top panel), 5 (bottom panel), 6 (Knock-out hole), 7 (Knock-out hole), and 8 (Knock-out hole).

Bottom View: Shows the base of the unit with dimensions 715 (width) and 1132 (depth). It includes labels for "Pitch of foundation bolt holes" and "Oblong Holes (Foundation bolt holes)".

Detail for front side: Shows a close-up of the front side of the unit with dimensions 103, 151, 175, and 210. Callouts include 1, 2, and 3.

Detail for bottom side: Shows a close-up of the bottom side of the unit with dimensions 127, 157, 166, and 48. Callouts include 1, 2, and 3.

3D076986

NOTES

1. Detail for front side and detail for bottom side indicate the dimensions after fixing the attached piping.
2. "※" is a size in the state where accessory piping is connected.

[illegible]

3D076987

NOTES

1. Detail for front side and detail for bottom side indicate the dimensions after fixing the attached piping.
2. "✳" is a size in the state where accessory piping is connected.



Zanotti Condensing units with CO₂ refrigerant



Coming
soon



Standard Condensing units

Standard condensing units with transcritical cycle

- › Chassis in galvanized and painted steel sheet. Bodyworking and soundproofing available
- › High modular concept.
- › The gascooler can be disconnected from the unit
- › Electrical board with all the necessary electronics for the operation of the unit
- › 1 MT compressor
- › (Optional) Frequency drive
- › All piping done in stainless steel
- › Multiple options possible to facilitate transport of the unit
- › All necessary safety devices
- › 3 air exit configurations
- › Reduced dimensions
- › Easy to transport
- › Until 6 assembly options



F-GAS Free



Switchboard



Plug&Play



Electronic Control



Proportional Modulation




Heating Interchanger (Optional)



Protective Case

FNV42

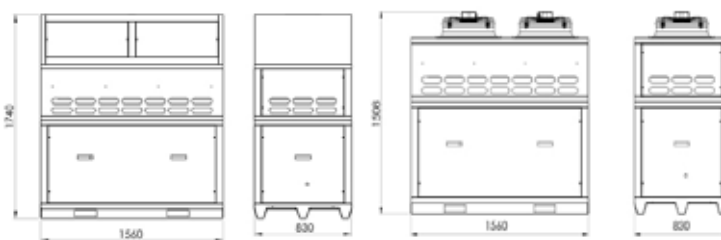

FNV58


☒ MT 1 comp.

FC17	7 kW
832 mm	9 kW

FNV42	18 kW
1560 mm	22 kW

FNV58	38 kW
1560 mm	45 kW

Conditions: LT: Tev.: -35°C SH: 8°K
MT: Tev.: -10°C SH: 8°K
Clime: Tev. med: 5°C SH: 8°K

LT

MT

Clime

Global

MSC Mechanical subcooler

PC Parallel compressor

Heating interchanger

Axial

Radial

CO₂ Condensing Units

Small Booster Condensing units

Small condensing units with Transcritical cycle

- › Gas cooler with Axial or Radial EC fans.
- › Air connection: Three different configurations
- › V-shaped gas cooler optimized for CO₂ applications
- › Compressor configuration:
 - CU: 1 x MT
 - Racks: 1 x MT + 1 x LT/2xMT
- › Racks Standard delivery:
 - Inverter: 1x MT and 1x LT compressor
 - CU: inverter optional
- › High safety level with pressure relief valves, pressure switches and intelligent controls
- › Stainless steel Piping
- › Galvanized and painted sheet metal chassis and weather proof enclosure.
- › Optional: acoustic insulation
- › Electrical Panel including electronic controller and control panel
- › Modular concept - The gascooler can be disassembled from the unit and assembled in different configurations



- › Reduced dimensions
- › Easy to transport
- › Until 6 assembly options



F-Gas Free



Switchboard



Plug&Play




Electronic Control


Proportional
Modulation

Heating
Interchanger
(Optional)


Protective Case



FNV42

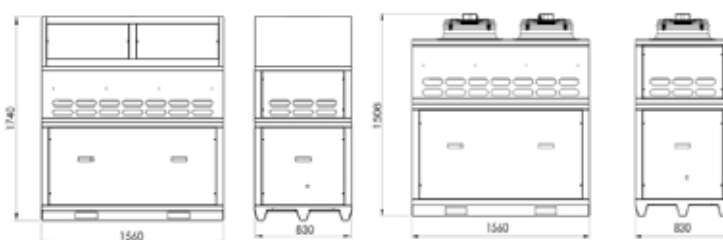

FNV58



- ✓ MT
- ✓ MT + LT



Conditions: LT: Tev.: -35°C SH: 8°K
 MT: Tev.: -10°C SH: 8°K
 Clime: Tev. med: 5°C SH: 8°K

Large Booster Condensing units

Large condensing units with Transcritical cycle

- › Gas cooler with Axial or Radial EC fans.
- › Air connection: Three different configurations
- › (Optional) Heat recovery heat exchanger to take advantage of the "free heat" for air conditioning or for sanitary application
- › Galvanized and painted sheet metal chassis and weather proof enclosure.
- › Optional: acoustic insulation
- › Large liquid receiver
- › All piping done in stainless steel
- › Design adapted for loading and transportation
- › (Optional) Parallel compressor(s) to improve further the efficiency of the unit. Only for FCZ range where more than 2 compressor(s) can be used
- › Compressor configuration Bitzer/Dorin:
MT compressor(s)
Possibility to have combination of MT and LT compressor
- › Racks Standard delivery:
Inverter: 1x MT and 1x LT
- › Electrical Panel including electronic controller and control panel



- › High safety level with pressure relief valves, pressure switches and intelligent controls
- › Visible panel of manometers and pressostats
- › High modular concept.
- › The gascooler can be disconnected from the unit



F-Gas Free



Electronic Control


Proportional
Modulation

Heating
Interchanger
(Optional)



Protective Case


Parallel
compressors
(Optional)



Switchboard


Mechanical
Subcooler
(Optional)


- ✓ MT
- ✓ MT + LT

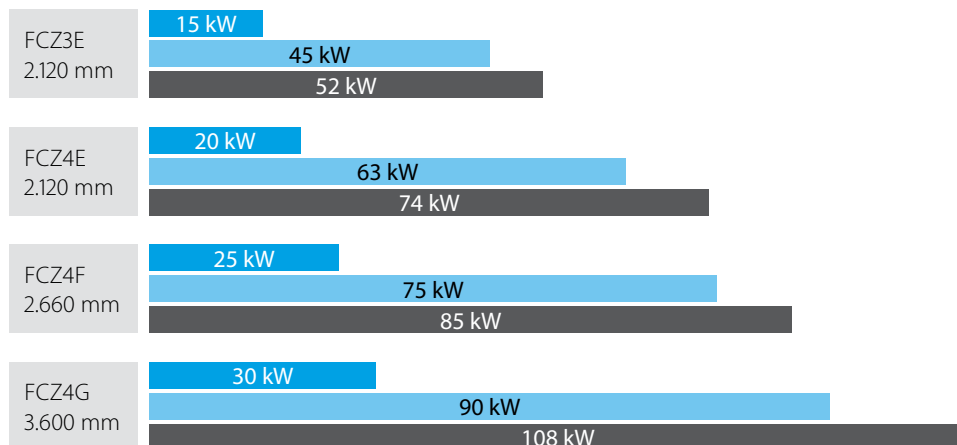


FCZ3E

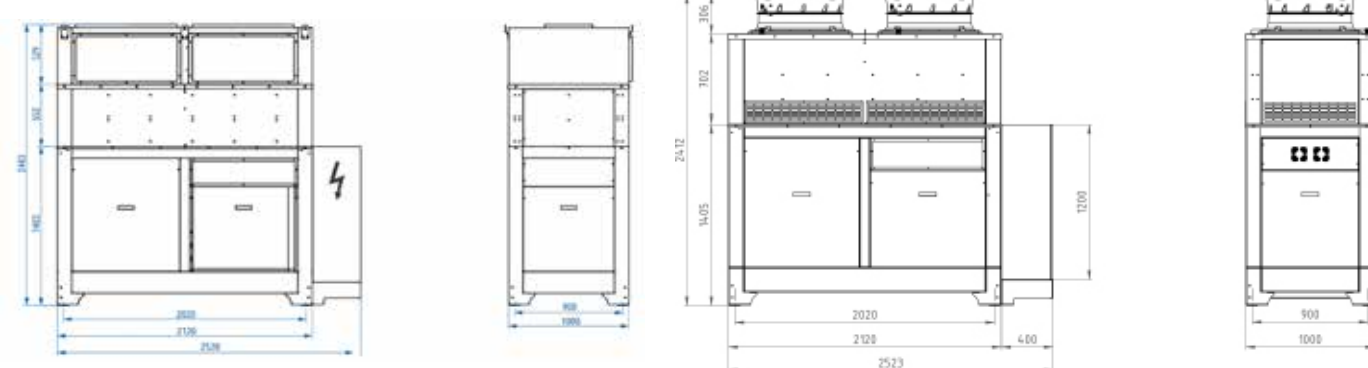


FCZ4E

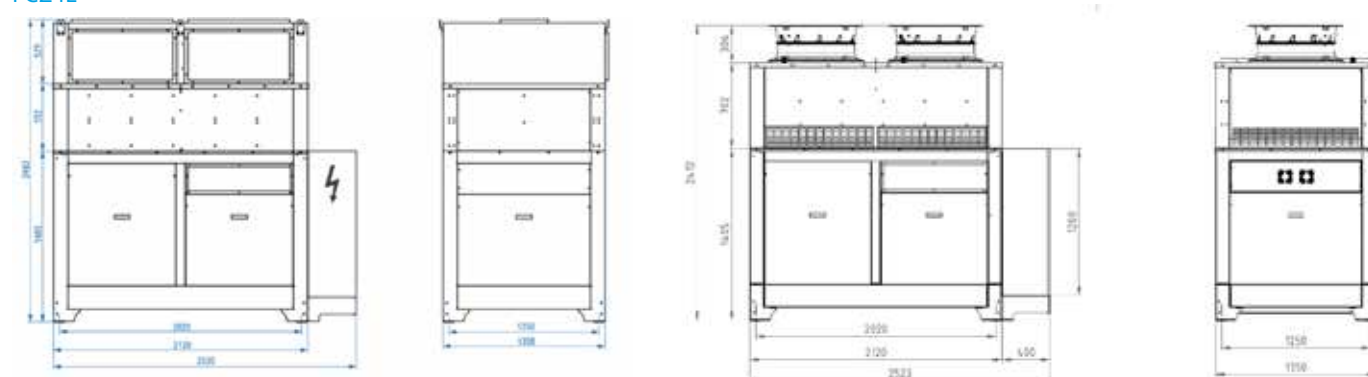

FCZ4G

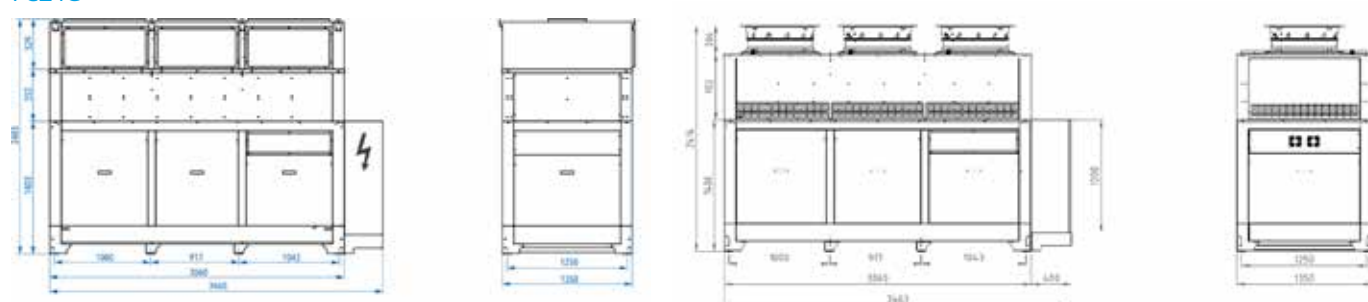

FCZ4F

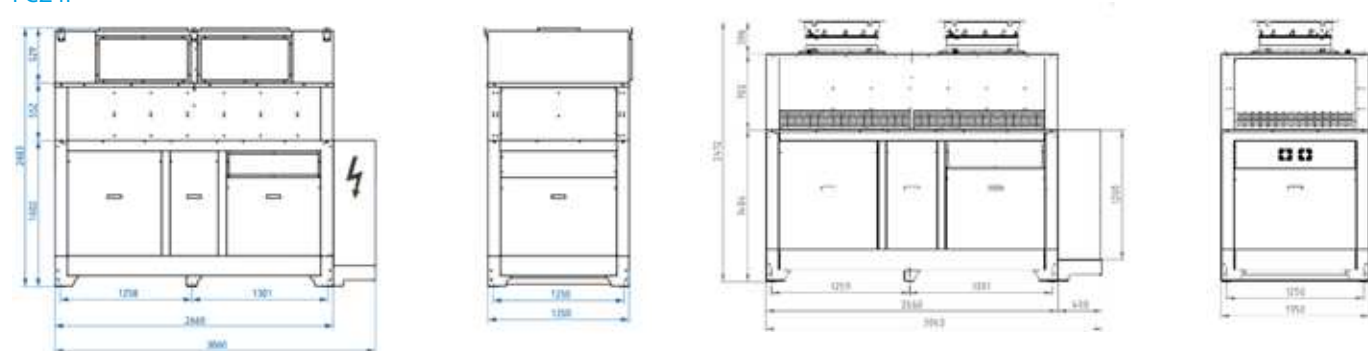



Compressor packs & racks

Compressor packs & racks

Freezing (Low temperature) (-20° C) Chilling (Medium temperature) (0° C)

Model	Product name	Capacity (kW)	0	2	5	10	25	50	100	150	300	450	500
Racks	CC Series												
													
Racks	Mini racks - FNB Compressor racks - FCCE Duplex racks - FUF, FUG, FUH, FUJ												
													

Compressor packs & racks

Multi compressor units

- ✓ Open frame for multi-compressors racks
- ✓ Three or four compressors on parallel
- ✓ Many different compressor types
 - › Hermetic
 - › Hermetic Scroll (Brand : Copeland)
 - › Semihermetic reciprocating (Brand: Bitzer, Dorin, Copeland Stream & Frascold)
 - › Screw (Brand: J&E Hall (single screw) and Bitzer (twin screw))
 - Larger Refrigeration capacities or solution with screw compressors has to be selected from our technical department.
 - Consist in many models for medium and low temperature, with a refrigeration capacity up to 900,000 Watt.
- ✓ Compatible with latest refrigerants*



Standard features

- › Metal open frame with electrical switchboard
- › Compressor parallel with discharge and suction header
- › Liquid receiver
- › Liquid line
- › High and low pressure switch
- › Electrical switchboard complete with electronic control


Most common used options:

- › Panels to close the frame and put it outside
- › Oil equalization through mechanical floating valve
- › Oil equalization through electronic valve
- › Oversized liquid receiver
- › Refrigerant charge

Other options available on request

Single Screw compressor

The single screw compressor consists of a main single screw and two gate rotors. They are designed for high capacities and optimal performances through the step less capacity control.

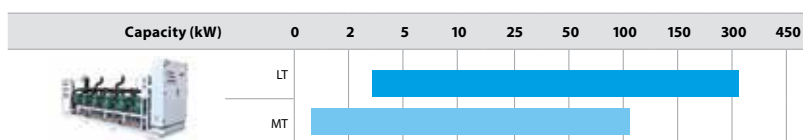

*Note: Selection from Selection software based on R404A, R134a and R407F

Multi compressors rack unit with Scroll/Digital scroll and hermetic reciprocating compressors

General features:

- › Capacity for MT cooling: 7,2 kW to 26 kW
- › Capacity for LT cooling: 6,6 kW to 12 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F depending on the used compressor
- › Copeland scroll/digital scroll, Tecumseh and Maneurop reciprocation hermetic compressors
- Other types, brands and capacities are possible upon request
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

Standard configuration:

Basic Frame Version:

Basic frame made from folded and pre-painted steel sheet, with complete closed frame with simple sound proof material and anti-vibration Supports (CC Standard)

Basic Refrigerating System:

The compressors (3 or 4) are connected in parallel, with one suction and discharge header. Each compressor is fitted with shut-off valves on suction line and discharge line.

The compressors are fixed to the frame through rubber anti-vibration supports.

The oil equalization system is composed of an oil separator and an equalization header, which are mounted on the compressor oil sight glass connection.

According to the number of compressors fitted, there is one or two oil level indicator/s, fitted onto the equalization header.

The refrigerating system is equipped with liquid receivers, if there is more than one receiver, the installation is made in parallel with a safety valve, a dehydration cartridge filter, interchangeable, liquid level alarm, liquid sight glass and shut-off valves.

On suction line there is a mechanical cartridge filter, interchangeable.



The refrigerating system is fitted with:

- › General high pressure switch, adjustable and auto-resetting
- › General low pressure switch, adjustable and auto-resetting
- › Emergency low pressure switch, adjustable and auto-resetting
- › Low pressure switches for each compressor emergency, adjustable and auto-resetting
- › High pressure switches to control condenser fans, adjustable and auto-resetting
- › Low pressure probe, placed on suction header for capacity control
- › High pressure gauge
- › Low pressure gauge
- › With or without integrated condenser

Electrical panel:

Standard power distribution

Disconnecting switch

Compressors protection, with overload cut-out motor protector; fuses for fans protection, thermo contacts for each single fan

Auxiliary circuit 230 volt through transformer 400V/230V

Electronic card XC440C

IP55 with greed and ventilation fan

On the door there is the electronic card and 4 lamps: emergency (button + lamp), fans block, high pressure switch block, low pressure

Switch block, and selector for on/off compressors.

Condensation control through pressure switches: 1 pressure switch every 2 fans, standard 2 pressures

Accessories:

INSRD	Closed frame with double layer sound proofing material
AC&R	Mechanical oil equalization system with oil reserve, oil line filter, pressure reduction valve onto oil reserve
TRAXOIL	Electronic oil distribution system
INSRD	Closed frame with double layer sound proofing material

RIC. LIQ.	Oversized liquid receiver
CFF	Compressors sound shell
ELC.C	Electronic card EWCM4180 - XC1000D - EWCM9100
FQD	Frequency driver

Other additional equipment and special requirements on request

Multi compressor rack unit with semi hermetic compressors

General features:

- › Capacity for MT cooling: 25 kW to 320 kW
- › Capacity for LT cooling: 13 kW to 133 kW
- › Ambient temperature range : - 25°C - +43°C
- › R134A a, R 449A, R448A, R452A R407F
- › Reciprocating semi hermetic compressors: Bitzer, Dorin, Frascold, Copeland stream
- Other types, brands and capacities are possible on request
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

Standard configuration:

Basic Frame Version:

Basic frame made from folded and painted steel sheet, screwed with bolts to make a basic structure to fix the components on it.

Basic Refrigerating System:

The compressors (3 or 4) are connected in parallel, with only one suction and discharge header. Each compressor is fitted with shut-off valves on suction line and discharge line.

The compressors are fixed to the frame through rubber anti-vibration supports.

Compressors used for low temperature are complete with fan heads.

The oil equalization system is composed of an oil separator and an equalization header, which are mounted on the compressor oil sight glass connection.

According to the number of compressors fitted, there is one or two oil level indicator/s, fitted onto the equalization header.

The refrigerating system is equipped with liquid receivers, if there is more than one receiver, the installation is made in parallel with a safety valve, a dehydration cartridge filter, interchangeable, liquid level alarm, liquid sight glass and shut-off valves.

On suction line there is a mechanical cartridge filter, interchangeable.



The refrigerating system is fitted with:

- › General high pressure switch, adjustable and auto-resetting
- › General low pressure switch, adjustable and auto-resetting
- › Oil pressure switch for each compressor
- › Emergency low pressure switch, adjustable and auto-resetting
- › Low pressure switches for each compressor emergency, adjustable and auto-resetting
- › High pressure switches to control condenser fans, adjustable and auto-resetting (the pressure switches control 2 fans; if there are more than 4 condenser fans, the quantity of pressure switches installed increases to a maximum of 4)
- › Low pressure probe, placed on suction header for capacity control
- › High pressure gauge
- › Low pressure gauge

Electrical panel:

Standard power distribution

Disconnecting switch

Compressors protection, with overload cut-out motor protector, fuses for fans protection, thermos contacts for each single fan

Auxiliary circuit 230 volt through transformer 400V/230V

Electronic card XC440C

IP55 with greed and ventilation fan

On the door there is the electronic card and 4 lamps : emergency (button + lamp), fans block, high pressure switch block, low pressure

Switch block, and selector for on/off compressors

Condensation control through pressure switches: 1 pressure switch every 2 fans, standard

Accessories:

INSRD	Closed frame with double layer sound proofing material
AC&R	Mechanical oil equalization system with oil reserve, oil line filter, pressure reduction valve onto oil reserve
TRAXOIL	Electronic oil distribution system
INSRD	Closed frame with double layer sound proofing material
CFF	Compressors sound shell
FQD	Frequency driver

RIC. LIQ.	Oversized liquid receiver
FREON	Refrigerant charge
ELC.C	Electronic card EWCM4180 - XC1000D – EWCM9100
CR1	CR1 Capacity controller
CR2	CR2 Capacity controller
CAP	Capacity step controled compressors

Other additional equipment and special requirements on request

The final leap towards natural refrigeration

Power and compressors

The compression sets are made up of 2 to 4 compressors except in the case of parallel compression, which adds up to 2 specific compressors.

BT

FULL SERIES 10 kW - 60 kW

MT

10 kW **FULL BT** 110 kW

Transcritical booster

20 kW **FULL BPT** 210 kW


Traditional booster with parallel compression

15 kW **FULL BC** 190 kW

Booster with condensation assistant

30 kW **FULL BPC** 240 kW

Subcritical booster with parallel compression

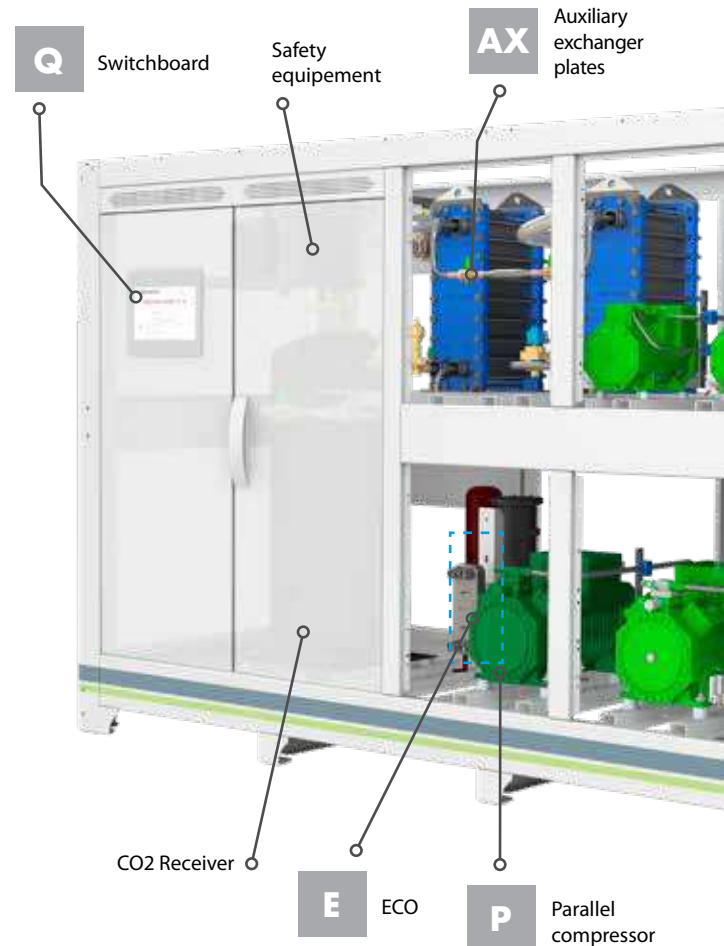

Efficiency improvement by modulation

One frequency inverter for each compression group adapts its function parameters to the system cooling necessities continuously **saving energy** and **extending the service life of the machine**.

Chassis

FullCO₂ models are available in sheet metal chassis, accessible 360° with **option of housing and acoustic insulation**.



Plug & play

The units are prepared for **a very agile start-up at a mechanical and electronic level**, with built-in electric panel.



Technology for Everyone

Automation and operation of the system are made with **open technology standards**. Thus the customer does not depend on a single manufacturer or installer, which **decreases maintenance and repair costs**.



Double safety

Several components have been designed to perform a second function in case of failure **avoiding the system shutdown**.



**BT⁻****Low temperature group**

Covers freezing needs. Equipped with oil system, gas cooler connections and all necessary protection and safety elements.

MT⁺**Medium temperature group**

It covers the refrigeration needs and allows the operation of the BT group. Equipped with oil system, gas cooler connections and all necessary protection and safety elements. Includes CO₂ receiver.

AX**Auxiliary exchanger plates**

They keep the plant at its optimum operating point when ambient temperatures are high.

P**Parallel compressor**


The efficiency of the system is considerably increased.

E**Economizer**

Increases the efficiency of the system by making the MT compressors give part of their power to the BT group.

Q**Switchboard**

Integrated and easy to use via touch screen, it displays an exclusive control software.

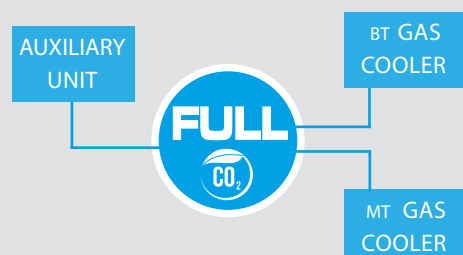Full CO₂ general scheme**Retrofit & external condensation**

Our system offers the possibility to take advantage of an existing machine using it in ancillary functions and also, recover a large amount of gas, with the consequent savings.

FullBC & FullBPC models allow to assist the condensation of the CO₂ booster in different ways:

- › Using an already present unit (Retrofit).
- › Partially using equipment from another service such as air conditioning.
- › Installing a specific equipment recommended by Tewis.

Small Racks

Small transcritical units without condenser

- › Small dimensions:
1600 x 840 x 840 mm
- › Easy transportation
- › Complete switchboard with protections, according to European legislation
- › Switchboard includes an advanced control software to manage all the electrical and electronic switches of the machine
- › 2 compressors
- › Safety mode: In case of anomalous increase in temperature or pressure in the liquid zone, the safety equipment is activated by stabilizing the CO₂ pressure. The equipment is designed to take
- › Proportional modulation: A frequency inverter in each group of compressors adapts its operation to the specific demand of each moment, saving energy and prolonging the life of the plant. the current of a generator set and works even during a power cut.
- › Heat recovery (optional) which allows to take advantage of the heat generated by the system discharge for air conditioning or ACS.



F-Gas Free



Switchboard




Plug&Play




Electronic Control

Proportional
ModulationHeating
Interchanger
(Optional)

Protective Case

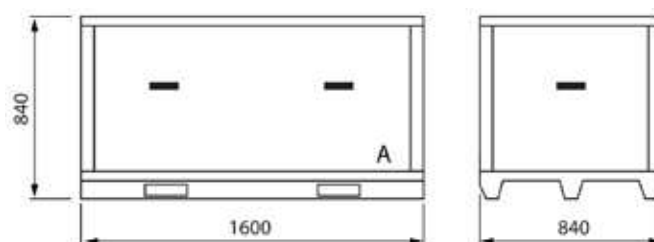

- ☒ MT
- ☒ MT + LT



Conditions: LT: Tev.: -35°C SH: 8°K
 MT: Tev.: -10°C SH: 8°K
 Clime: Tev. med: 5°C SH: 8°K

Compressor packs & racks

Medium Racks

Transcritical units without condenser

- › Adapted design for loading and transportation
- › Integrated switchboard. Easy to use via touch screen and displays an exclusive control software
- › Heat recovery (optional) which allows to take advantage of the heat generated by the system discharge for air conditioning or ACS.
- › Parallel compressor (optional).
- › The parallel compression includes one or two compressors that extract steam from the accumulation tank, lightening the load of the rest of the compressors and improving their efficiency index.
- › Possibility of incorporating up to 4 compressors
- › Proportional modulation: A frequency inverter in each group of compressors adapts its operation to the specific demand of each moment, saving energy and prolonging the life of the plant.
- › Mechanical subcooler exchanger, connected to an auxiliary unit that cools the discharge of the transcritical fluid, reducing steam and increasing the efficiency of the system



F-Gas Free



Switchboard



Plug&Play



Electronic Control



Proportional Modulation



Heating Interchanger (Optional)




Protective Case




Parallel compressors (Optional)



Mechanical Subcooler (Optional)

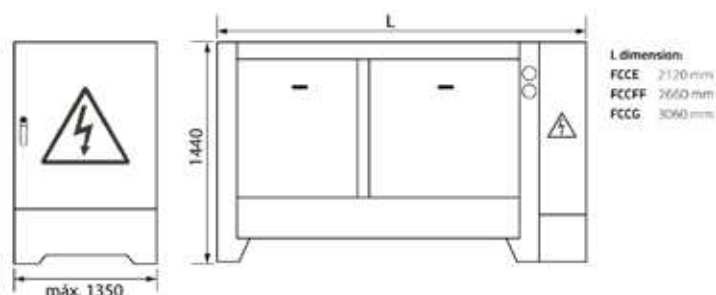

- ☒ MT 2 3 4 5 comp.
☒ MT + LT 2+1 3+1 3+2 4+1



Conditions: LT: Tev.: -35°C SH: 8°K
 MT: Tev.: -10°C SH: 8°K
 Clime: Tev. med: 5°C SH: 8°K

LT

MT

Clime

Global



Mechanical subcooler



Parallel compressor



Heating interchanger

Large Racks

Transcritical double units without condenser

- › Integrated switchboard. Easy to use via touch screen and displays an exclusive control software (see next page)
- › Parallel compressors (optional), which increase considerably the efficiency of the system
- › Possibility of incorporating up to 9 compressors
- › Low and Medium temperature compressors
- › Economizer: Increases the efficiency of the system by making the MT compressors give part of their power to the LT compressors group.
- › Proportional modulation: A frequency inverter in each group of compressors adapts its operation to the specific demand of each moment, saving energy and prolonging the life of the plant.
- › Mechanical subcooler exchanger, connected to an auxiliary unit that cools the discharge of the transcritical fluid, reducing steam and increasing the efficiency of the system
- › Stainless steel in 100% of the pipes



F-Gas Free



Protective Case

Heating
Interchanger
(Optional)

Plug&Play



Switchboard

Parallel
compressors
(Optional)Proportional
Modulation

Electronic Control

Mechanical
Subcooler
(Optional)
☒ MT + LT


3+3 4+2 4+3 5+4

 FUF
2.660 mm

33 kW

35 kW

45 kW

 FUG
3.060 mm

64 kW

74 kW

83 kW

 FUH
3.600 mm

64 kW

120 kW

127 kW

 FUJ
4.000 mm

64 kW

178 kW

187 kW

 Conditions: LT: Tev.: -35°C SH: 8°K
 MT: Tev.: -10°C SH: 8°K
 Clime: Tev. med: 5°C SH: 8°K

LT

MT

Clime

Global

Mechanical
subcoolerParallel
compressorHeating
interchanger

Switchboard & electronic control




Switchboard


- › Bench-mounted switchboard, including complete wiring.
- › Power supply at 400V / 3F + N / 50Hz
- › Frequency inverter in the first compressor in sections BT, MT and parallel
- › Booster components and remote gas coolers electrically protected against overcurrents and short circuits.
- › Option: electrical connections of power supply to the auxiliary unit



Electronic control

- › It represents the best option for transcritical and subcritical CO₂ solutions with Booster circuit and allows to manage up to two circuits for the recovery of heat.
- › Televis System compatible and open for the integration of Modbus RTU / TCP or BACnet MS / TP (optional) systems.
- › Touch screen with synoptic and real-time data.
- › Data logging and alarms.
- › Historical charts and data tables.
- › Parameter management.

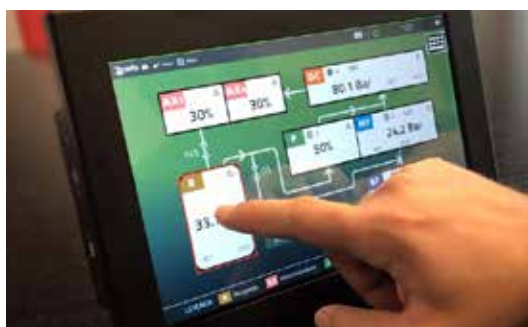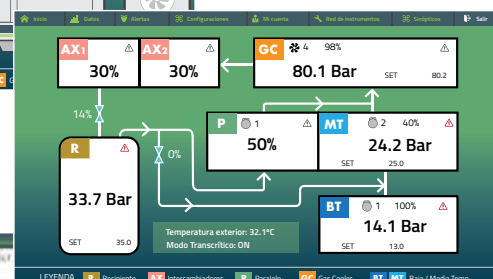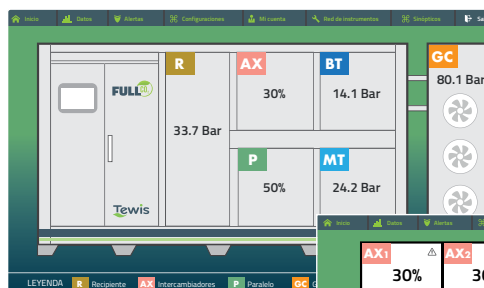

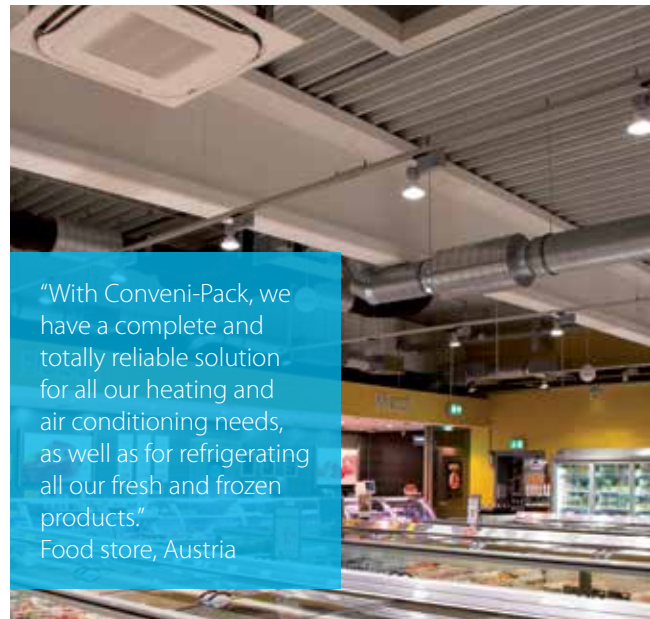

"With Conveni-Pack, we have a complete and totally reliable solution for all our heating and air conditioning needs, as well as for refrigerating all our fresh and frozen products."
Food store, Austria



"The flexible system optimally accommodates different cooling temperatures for all refrigerating units and can be controlled remotely. The system's near-silent operation guarantees that the noise level is kept at a minimum for residents."
Hotel 47°, Germany



"An organic market should not just sell sustainable food products but should also use green energy and as little as possible. It was not just for reasons of conscience and image that Bergfeld's Biomarkt in Bonn decided on ZEAS from Daikin."
Bergfeld's Biomarkt, Germany



"We wanted a future-proof, energy efficient and proven technology with high reliability."
Bakery cooperative, Germany



"Freshness and healthy nutrition contribute to patient recovery. The storage of easily perishable goods plays a key role here. That's why Municipal Hospital opted for a special refrigeration technology: ZEAS."
Kiel Municipal Hospital, Germany




"Quality and operational safety are important here at Germany's largest manufacturer of organic meat and sausage products. A total of 28 ZEAS systems with future-proof R-410A guarantee a fault-free and closed refrigeration chain."
kff kurhessische fleischwaren GmbH, Germany



In a German supermarket Conveni-Pack teams up with ZEAS to supply service counters, fridges, an air curtain and indoor A/C units, a cooling storage room and deep-freeze cabinets.



Integrated solutions



Model	Product name	Capacity (kW)	0	2	5	10	25	50	100	150	300	450
Integrated solution for chilling, freezing, comfort cooling and heating	Conveni-Pack LRYEQ-AY 											
	Mini racks, Racks, Duplex 											

Service station (Ranst, Belgium) Conveni-Pack

Discover why a Belgian petrol station owner chose Daikin for its shop comfort and refrigeration needs.
www.youtube.com/DaikinEurope



Conveni-Pack,


integrated solution for commercial refrigeration, heating and air conditioning

Why choose Conveni-Pack?

Competition in the retail food sector is fierce. This does not just affect the income you can earn from sales - operating costs are also a determining factor for success.

Energy efficient heat recovery system


- › Conveni-Pack recovers up to 100% of the heat extracted from supermarket refrigeration cases and re-uses it to heat the retail space and improve shop comfort at no additional cost (heat recovery system)
- › Savings of up to 50% on energy costs
- › Daikin inverter scroll compressor with economizer technology

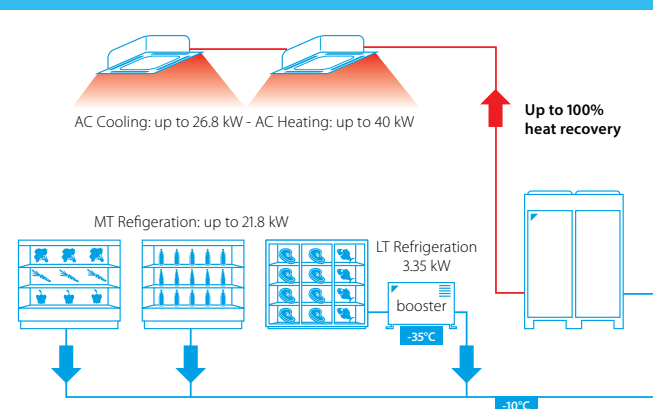

Above-mentioned scheme is an example of what can be delivered depending on predefined conditions. For more detailed information, please consult the technical specifications in this catalogue.

Installing a compact solution

- › Easy to install, even in small spaces
- › Small footprint (up to 60% smaller footprint than conventional systems) and low weight
- › Reduced piping requirements
- › Minimal planning groundwork and lower assembly costs

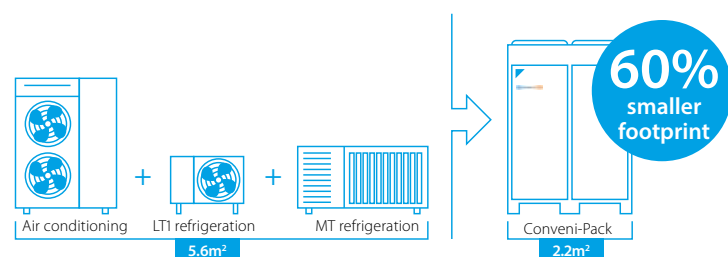

Unique combination

- › First mass-produced, whole-building system to combine medium and low refrigeration, heating, air conditioning in one circuit


Reliable operation

- › Error-proof component selection
- › Factory leak-tested and pre-charged


Year-round climate comfort

- › Quiet operation : Improved acoustics thanks to night operation mode, inverter control and inverter driven fans with optimised blades and grills
- › High grade sound insulation on both panels and compressors
- › Specially designed fan blades to limit sound emissions
- › 4 low sound operation settings including night mode
- › The heat recovered from refrigerated and freezer display cabinets can be used to provide heating for the shop.


Summer

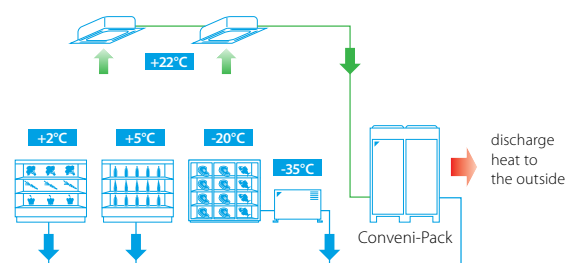

Spring/Autumn

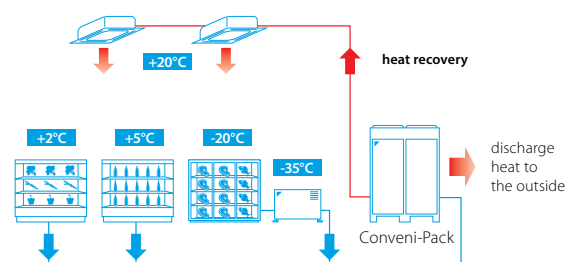

Winter

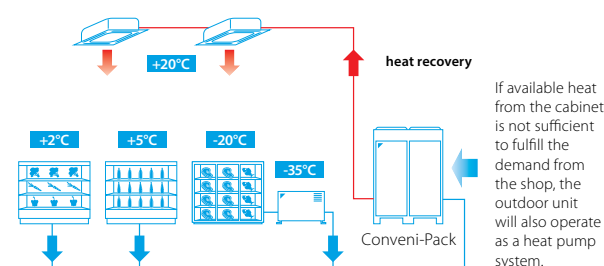

Internationally awarded

Winner of several awards* thanks to the innovating technology used and environmental friendly solution offered:



- › Winner of UK Environmental Product of the Year, Cooling Industry Awards - 2006
- › Winner of Incentive Prize, German Environment Ministry - 2007
- › Winner of the Innovation Trophy, equipmag (exhibition in France) - 2008
- › Winner of 2014 Institute of Refrigeration Ireland (IRI) Environmental award
- › Environmental Friendliness category of the Top Retail Product Awards 2014 in Germany

Reference

Edeka Buschkühle supermarket (Germany)

2 Conveni-Pack systems supply 32 meters of service counters, 12.5 meters of convenience fridges, one cooling storage room for fruit, an air curtain and 5 indoor units; the ZEAS system supplies two deep-freeze cabinets with a total capacity of 5 kW.



Discover more references on www.daikineurope.com/references

Benefits for installers/consultants

- › Integrated electrical & control box
- › Unit already pre-charged with refrigerant
- › Established VRV technology ensuring optimised installation and maintenance
- › Reduced delivery time thanks to European manufacturing plant
- › Flexible system for multiple applications
- › Connectable to all grocery refrigeration applications and supplied with a wide range of air conditioning indoor units to meet shop requirements
- › Outdoor units can be positioned up to 35m above or 10m below the indoor units
- › Piping length possible up to 130m
- › Suitable for indoor installation through the use of high ESP fans

Benefits for shop owners

- › Thought design for supermarkets and smaller retail outlets
- › Maximised retail sales space available as Conveni-Pack has a footprint up to 60% smaller than conventional grocery refrigeration systems
- › Reduced energy consumption by up to 50% through heat recovery
- › Quiet operation, thus ideal for densely populated urban areas

Marketing tools

Refrigeration Xpress

User-friendly design software for Conveni-Pack, CCU, SCU and ZEAS condensing units. Its detailed report includes a list of materials, piping and wiring diagrams, and device options.



Short videos

- › Watch a short animation on the unique refrigeration solution Conveni-Pack



Conveni-Pack refrigeration system with heat recovery

Refrigeration solution for food retailers featuring award winning technology for heat recovery

- › Integrates high and low temperature refrigeration and air conditioning (including heating) into one system
- › By using heat recovery, optimised controls and state of the art compressor technology, Conveni-pack can reduce annual energy consumption up to 50% or more, compared to conventional systems
- › Lower associated CO₂ emissions thanks to the heat pump technology
- › Conveni-pack's modular design allows it to be used for smaller as well as larger shops
- › The modularity of the Conveni-pack system maximises installation flexibility. Outdoor units can be grouped into blocks or rows, or distributed around the building, to meet individual installation constraints
- › The heat extracted from the refrigeration showcases or evaporators can be re-used for comfort heating of the shop at no extra cost
- › Low sound level including „night mode“ operation



Conveni pack, in combination with a ZEAS unit.

This store was nominated by spar as its 'local supermarket of the year', thanks in part to its owner's strategic investment in a key department: Refrigeration. By installing a Conveni pack in combination with Zeas, it was possible to **save around €10,000 on energy costs each year**, from money that would otherwise have spent on heating. **SPAR, Supermarket.**

Medium Temperature Refrigeration				LRYEQ-AY	16
Cooling capacity	Air conditioning	Nom.		kW	14,0 (1)
	Refrigeration	Nom.		kW	21,8 (2)
Heating capacity	Air conditioning	Nom.		kW	27,0 (3)
	Refrigeration	Nom.		kW	21,8 (4)
Dimensions	Unit	Height		mm	1.680
		Width		mm	1.240
		Depth		mm	765
Weight	Unit			kg	370
Heat exchanger	Type				Cross fin coil
Compressor	Type				Hermetically sealed scroll compressor
	Piston displacement			m ³ /h	13,34
	Speed			rpm	6.300
	Output			W	2.500
	Starting method				Direct on line (inverter driven)
	Frequency ON/OFF				Less than 6 times/hour
Compressor 2	Speed			rpm	2.900
	Output			W	3.600
Compressor 3	Speed			rpm	2.900
	Output			W	4.500
Fan	Type				Propeller fan
	Quantity				2
Fan motor	Air flow rate	Cooling	Nom.	m ³ /min	230
	Output			W	750
	Drive				Direct drive
Sound pressure level	Nom.			dBA	62,0
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-20~10
	Cooling	Ambient	Min.~Max.	°CDB	-5~43
	Heating	Ambient	Min.~Max.	°CDB	-15~21
Refrigerant	Type				R-410A
	GWP				2.087,5
	Charge			kg	11,5
				TCO ₂ eq	24,0
	Control				Electronic expansion valve
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/380-415

(1) Cooling priority mode: indoor temp. 27°CDB, 19°CWB; outdoor temp. 32°CDB; piping length: 7.5m; level difference: 0m (2) Cooling priority mode: evaporating temp. -10°C; outdoor temp. 32°CDB; Suction SH: 10°C (3) Heat recovery 100% mode: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; refrigeration load 18kW; piping length: 7.5m; level difference: 0m (4) Saturated temperature equivalent to suction pressure (refrigeration side): -10°C (under chilled condition); connection capacity for indoor air conditioner: 10HP, when heat recovery is 100%

Indoor units and Biddle air curtains for connection to Conveni-Pack

To respond to all shop requirements for comfort cooling and heating, a wide range of air conditioning indoor units and Biddle air curtains are available.

Capacity class (kW)

Model	Product name		50	63	71	80	100	125	140	200	250
Cooling capacity (kW) ¹			5,6	7,1	8,0	9,0	11,2	14,0	16,0	22,4	28,0
Heating capacity (kW) ²			6,3	8,0	9,0	10,0	12,5	16,0	18,0	25,0	31,5
Round flow cassette	FXFQ-A		•	•		•	•	•			
2-way blow ceiling mounted cassette	FXCQ-A		•	•		•		•			
Ceiling mounted corner cassette	FXKQ-MA			•							
Concealed ceiling unit with inverter driven fan	FXSQ-A		•	•		•	•	•			
Concealed ceiling unit with inverter driven fan	FXMQ-P7		•	•		•	•	•			
Large concealed ceiling unit	FXMQ-MB									•	•
Ceiling suspended unit	FXHQ-A			•			•				
4-way blow ceiling suspended unit	FXUQ-A				•		•				
Floor standing unit	FXLQ-P		•	•							
Concealed floor standing unit	FXNQ-A		•	•							

Capacity class (kW)

Model	Product Name		80	100	125	140	200	250
Heating capacity (kW) ²			7,4 - 9,2	11,6 - 13,4	15,6	16,2 - 19,9	29,4	29,4 - 31,1
Biddle air curtain free hanging	CYVS-DK		•	•	•	•	•	•
Biddle air curtain cassette	CYVM-DK		•	•	•	•	•	•
Biddle air curtain recessed	CYVL-DK		•	•	•	•	•	•

¹ Nominal cooling capacities are based on: indoor temperature: 27°CDB / 19°CWB, outdoor temperature: 35°CDB, piping length: 7,5m, level difference: 0m

² Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB / 6°CWB, piping length: 7,5m, level difference: 0m

Technical drawings of the outdoor unit for the 3D0668 air conditioner, showing dimensions and connection details.

Top View:

- 1102 (Pitch of foundation bolt holes)
- 4-15X22.5-mm-Oblong holes (foundation bolt hole)
- 722 ~ 737 (Pitch of foundation bolt holes)

Front View:

- 1680 (Height)
- 1570 (Height)
- 765 (Width)
- 67 (Flange width)
- Detail A
- Knock-out holes: 5, 6, 7, 8, 9, 10, 11, 12

Side View:

- 1570 (Height)
- 765 (Width)
- 67 (Flange width)
- Detail A
- Knock-out holes: 5, 6, 7, 8, 9, 10, 11, 12

Detail A:

- Knock-out hole

Detail for front side:

- Knock-out hole

Detail for bottom side:

- Knock-out hole

Legend:

- Liquid (For air conditioner) Ø 9.5 Brazed connection
- Gas (For air conditioner) Ø 25.4 Brazed connection
- Gas (For refrigeration) Ø 25.4 Brazed connection
- Liquid (For refrigeration) Ø 9.5 Brazed connection
- Grounding terminal inside of switch box (M8)
- Power cord routing hole (side) Ø 62
- Power cord routing hole (front) Ø 45
- Power cord routing hole (front) Ø 27
- Power cord routing hole (bottom) Ø 50
- Wire routing hole (front) Ø 27
- Pipe routing hole (front)
- Pipe routing hole (bottom)

3D066895A

LRYEQ-AY


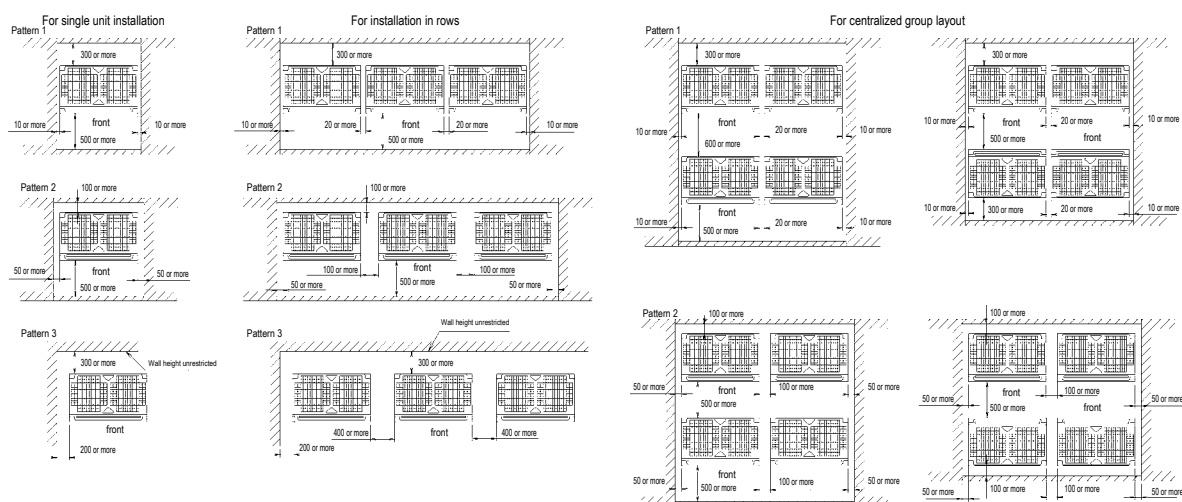


Figure 1

1. Heights of walls in case of patterns 1 and 2:
Front: 1500
Suction side: 500mm
Side: Height unrestricted
The installation space as shown on this drawing is based on cooling operation at 32°C. (outdoor air temperature).
If the design outdoor air temperature exceeds 32°C degrees, provide a broader suction space than showing on the drawing.
2. If the walls are higher than mentioned above, then additional space is needed.
Suction side: service space + h2/2
Front side: service space + h1/2
See figure 1
3. When installing the units, select the pattern that best fits the available space.
Always keep in mind to leave sufficient space for a person to pass between unit and wall and for the air to circulate freely.
If more units are to be installed than are catered for in the above patterns, your layout should take into account of the possibility of short circuits).
4. Provide sufficient space at the front to connect refrigerant piping (comfortably).



3D106211




Booster unit

- › A booster unit allows to connect freezer showcases / rooms to ZEAS and Conveni-Pack outdoor units
- › Reduced piping requirements, from 4 to 2 pipes, compared to a conventional system
- › Low sound mode available reducing sound emissions significantly without giving in on Refrigerating capacity




Booster with ZEAS:

MEDIUM + LOW TEMPERATURE refrigeration

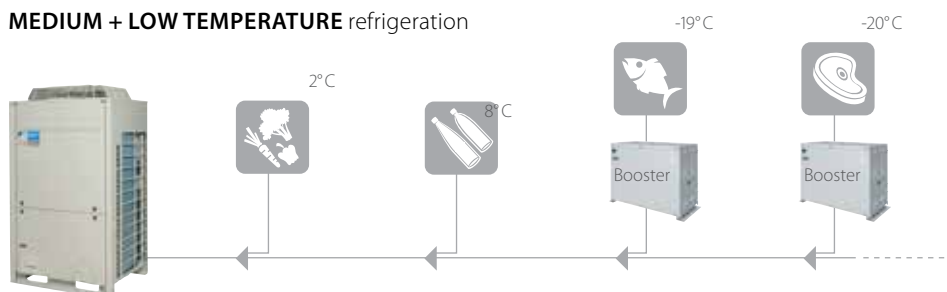

Booster with Conveni-Pack:

MEDIUM + LOW TEMPERATURE refrigeration + space air conditioning + Biddle air curtain

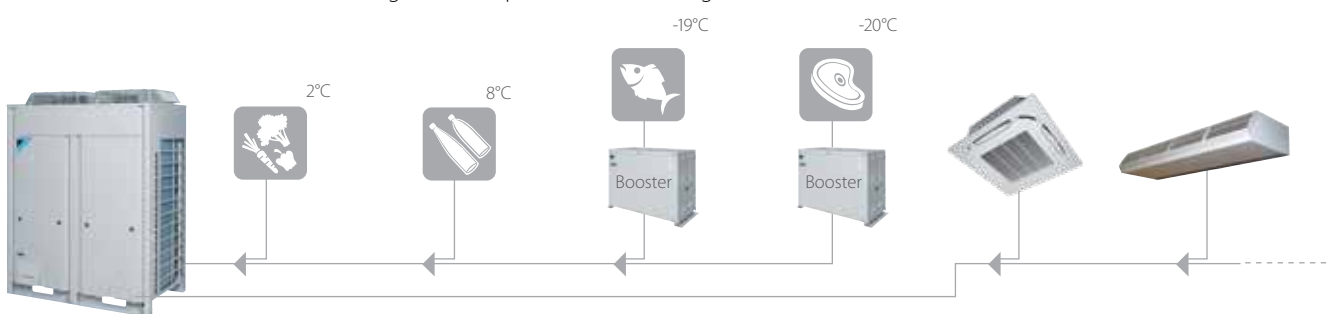

Low Temperature Refrigeration				LCBKQ-AV1	3
Refrigerating capacity	Low temperature	Nom.		kW	3,35 (1)
Dimensions	Unit	Height		mm	480
		Width		mm	680
		Depth		mm	310
Weight	Unit			kg	47
Compressor	Type				Hermetically sealed swing compressor
	Piston displacement			m ³ /h	10,16
	Number of revolutions			rpm	6.540
	Output			W	1.300
	Starting method				Direct on line (inverter driven)
	Frequency ON/OFF				Less than 6 times/hour
Fan	Type				Propeller fan
	Air flow rate	Cooling	Nom.	m ³ /min	1,6
Operation range	Evaporator	Cooling	Min.~Max.	°CDB	-45~-20
	Ambient temperature	Min.~Max.		°C	-15~43
Refrigerant	Type				R-410A
	GWP				2.087,5
	Control				Electronic expansion valve
Piping connections	For outdoor unit	Liquid	OD	mm	6,35
	To indoor unit	Liquid	OD	mm	6,35
	For indoor unit	Gas	OD	mm	15,9
	To outdoor unit	Gas	OD	mm	9,5
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240

(1) Evaporating temp. -35°C; outdoor temp. 32°C; suction SH 10K; saturated temp. to discharge pressure of booster unit -10°C

Medium temperature with air conditioning



Mini racks

- ✓ MT + Air conditioning
(with or w/o condenser)

1+2 (max. 3)

FNB	18 kW
FNV58	27 kW
1.560 mm	45 kW



Racks

- ✓ MT + Air conditioning
(with or w/o condenser)

2+2 (max. 4)

FCCE	18 kW
2.120 mm	40 kW
	52 kW

FCZ 3E	18 kW
FCZ 4E	50 kW
2.120 mm	74 kW

- ✓ MT + Air conditioning
(with or w/o condenser)

2+3 (max. 5)

FCZ4F	36 kW
2.660 mm	70 kW
	85 kW

FCZ4G	36 kW
FCCG	93 kW
3.060 mm	108 kW




Duplex racks

- ✓ MT + Air conditioning
(with or w/o condenser)

5+4 (max. 9)

FUJ	115 kW
4.000 mm	230 kW
	250 kW

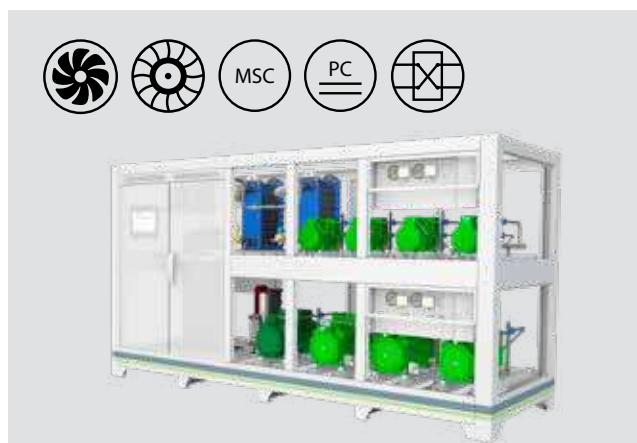


Conditions: LT: Tev.: -35°C SH: 8°K
MT: Tev.: -10°C SH: 8°K
Clime: Tev. med: 5°C SH: 8°K

Low temperature with air conditioning




Racks

- ✓ MT + LT + Air conditioning
(with or w/o condenser)  1+2+1 (max. 4)

FCCE FCZ3E FCZ4E 2.120 mm	 9 kW
	 30 kW
	 30 kW
	 52 kW
	 9 kW
	 30 kW
	 50 kW
	 74 kW

- ✓ MT + LT + Air conditioning
(with or w/o condenser)  1+2+2 (max. 5)


FCZ4F 2.660 mm	 9 kW
	 30 kW
	 60 kW
FCZ4G 4.000 mm	 85 kW
	 9 kW
FCCG 3.060 mm	 30 kW
	 70 kW
	 108 kW




Duplex racks

- ✓ MT + LT + Air conditioning
(with or w/o condenser)  2+3+4 (max. 9)

FUJ 4.000 mm	 18 kW
	 100 kW
	 200 kW
	 250 kW

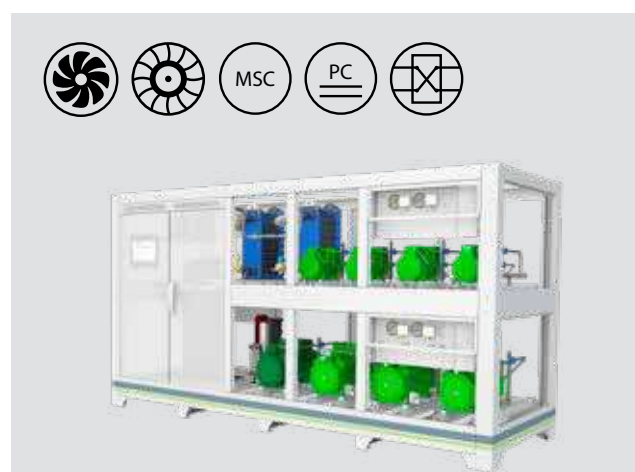

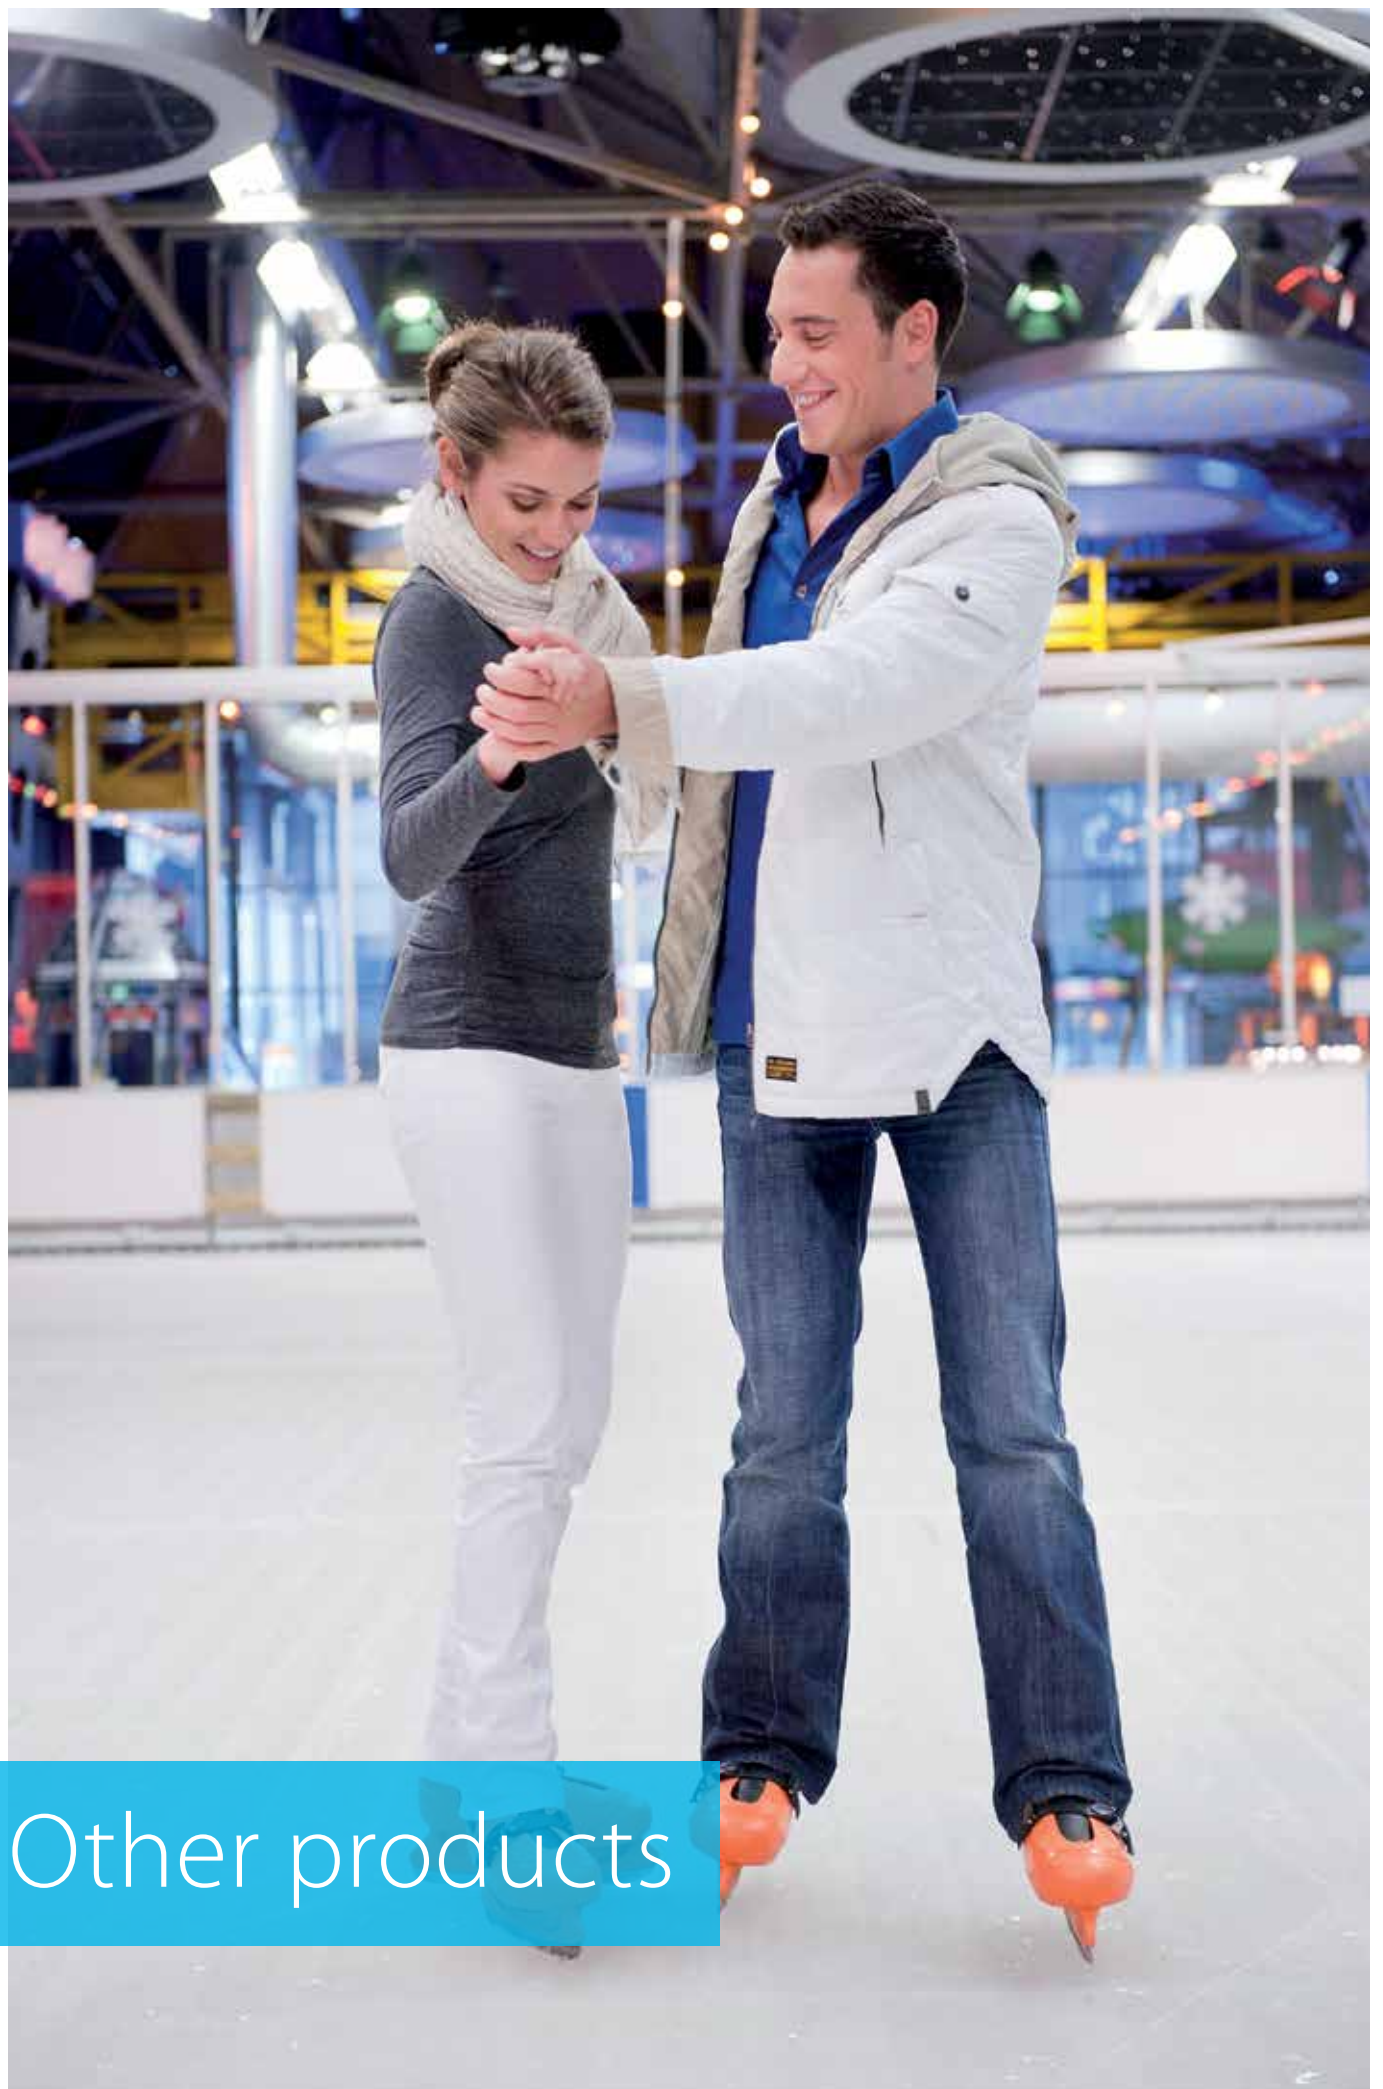

Other products

Evaporators range

Evaporators with or without TEV for different operations and refrigerants

General features:

- › Capacity for LT/MT cooling: 0,5 to 213 kW
- › Ambient/cooling room temperature range: - 40°C - +25°C
- › Refrigerants: R134A a, R 449A, R448A, R452A R407F, R 407A
- › Fin distance: from 3 mm to 11 mm
- › Fin materials: Al
- › Tube materials: Cu
- › Conditions:
 - MT: Ambient temperature: 35°C Evp. Temperature: -10°C
 - LT: Ambient temperature: 35°C Evp. Temperature: -35°C

Options:

- › Electric defrost heating
- › Hot gas defrost
- › Drain pan heating
- › Fan ring heater
- › High efficient EC fans
- › Wiring on terminal box
- › Included valves and regulation
- › Fin materials AISI 304, AISI 316
- › Tube materials AISI 304, AISI 316
- › Casing in stainless steel (Inox)




Types:

- › flat evaporator
- › double flow
- › cubic design
- › Evaporator only
- › Evaporator + EEV/TEV
- › Evaporator + EEV/TEV + electronic controller


For technical selection, prices, accessories and delivery time please use the Zanotti software and contact our technical department. We are happy to help you.

Dimensions


Flat




mm	A	B	C
201	215	614	410
202	215	1034	410
203	215	1614	410
232	150	713	455
301	300	910	690
302	300	1530	690
303	300	2150	690
304	300	2770	690
305	300	3390	690




Double flow

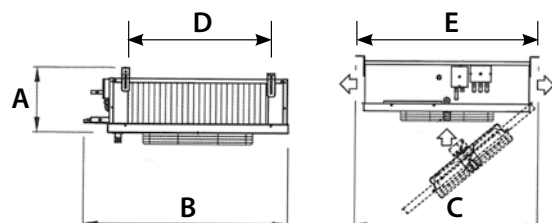


mm	A	B	C	D	E
231	171	579	585	293	600
232	171	889	585	603	600
233	171	1199	585	913	600
234	171	1509	585	1223	600
352	300	1671	995	1214	1065
353	300	2291	995	1834	1065
354	300	2911	995	2454	1065
355	300	3531	995	3074	1065



Cubic

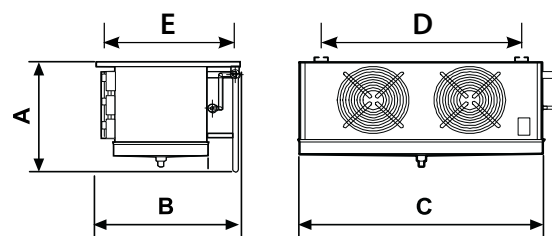

mm	A	B	C	D	E
301	420	480	789	495	345
302	420	480	1254	960	345
303	420	480	1719	1425	345
HEU351	545	690	805	605	540
HEU352	530	690	1220	965	540
HEU353	600	690	1690	1370	540
HEU403	620	700	1840	1520	545
HEU502	844	992	1829	1526	740
SKC352	490	606	1614	1270	450
SKC353	490	606	2234	1890	450
SKC452	610	650	2032	1680	510
SKC503	800	830	3350	2760	675

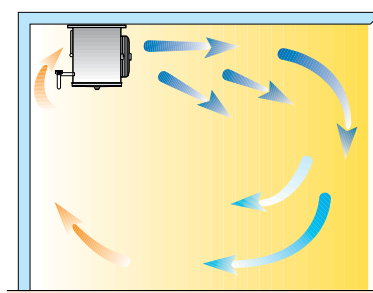

Other Monoblocks

Model	Refrigerant	Capacity range
Small- Monoblock for wall mounting AS-R	Standard refrigerant: MT: R134a, LT: R452A Other refrigerants possible upon request 	0° 0,43 to 7,4 kW -20° 0,75 to 7,4 kW P 1,5 to 7,4 kW
Large- Monoblock for wall mounting RS	Standard refrigerant: MT: R134a, LT: R452A Other refrigerants possible upon request 	0° 0,75 to 22 kW -20° 1,5 to 37 kW
Large- Monoblock for shock freezing PRS • CBX	Direct mounting trough the wall Standard refrigerant: MT: R134a, LT: R452A Other refrigerants possible upon request 	-40° 5,5 to 18,5 kW P 1,5 to 7,4 kW
Open frame condensing units with Bitzer semi hermetic compressor ZH	Standard refrigerants: R134a, R407H, R449A Other refrigerants upon request Semi hermetic Bitzer compressor Liquid receiver with safety pressure relief valve for PED units Many different options and accessories available upon request. 	-10° 2,3 kW to 44 kW -30° 1,5 kW to 31,5 kW
Large- Monoblock for shock freezing CBX • PBX	Duct connection Standard refrigerant: MT: R134a, LT: R452A Other refrigerants possible upon request 	-40° 22 to 55 kW P 22 to 55 kW

Other Bi-blocks

Model	Refrigerant	Capacity range
Small- Bi-Block with cubic evaporator DBS	MT: R134a, LT: R452A, R407F Other refrigerants possible upon request	 0° 0,4 to 7,4 kW -20° 0,7 to 11 kW
Middle- Bi-Block with cubic evaporator DBD	MT: R134a, LT: R452A, R407F Other refrigerants possible upon request	 0° 0,75 to 30 kW -20° 1,1 to 44,5 kW
Middle- Bi-Block with cubic evaporator CDB • PDB	MT: R134a, LT: R452A, R407F Other refrigerants possible upon request	 -40° 5,5 to 56 kW P 2,2 to 60 kW

Other

Model	Refrigerant	Capacity range
Small Mono and Bi-Block seasoning conditioner unit for meat and cheeses maturity process SAS	Standard Refrigerant: MT: R134a Other refrigerants possible upon request 	+12° 0,7 to 5,5 kW
Large mobile grain process and seasoning conditioner DUK	R404A - R407F 	0° 7,5 to 37 kW
Water Chiller ZC	Standard Refrigerant: MT: R134a, R449A 	-5° 19,4 to 197 kW -10° 16,3 to 165,2 kW -15° 13,3 to 86 kW -20° 10,6 to 69,1 kW
Large Mono and Bi-Block seasoning conditioner unit for meat and cheeses maturity process UAV	Standard Refrigerant: MT: R134a Other refrigerants possible upon request 	+12° 1,5 to 36,8 kW

Other Products

Transport refrigeration

Zanotti and Hubbard offer various systems for the refrigerated transport of fresh and frozen foods in small and medium sized vehicles.

For refrigerated transport with large vehicles Zanotti manufactures monoblock and panel-mounted diesel units (Un0° series).



Industrial range

Zanotti's core business in the industrial sector includes large cooling systems for logistics centers and cold storage solutions in the food, catering and petrochemical industries.

Many sports and leisure facilities, such as ice skating rinks or indoor winter sports halls use Zanotti freezing technology.



F-Gas Regulation

For fully/partially charged equipment: contains fluorinated greenhouse gases. Actual refrigerant charge depends on the final unit construction, details can be found on the unit labels.

For non pre-charged equipment (LCBKQ-AV1, JEHCCU/JEHSCU): Its functioning relies on fluorinated greenhouse gases.

Hubbard

Products

Hubbard Products has an enviable global reputation for innovation and excellence in refrigeration design, refrigeration engineering and refrigeration solutions for static and transport refrigeration requirements.

Hubbard serves the cool chain supply sector offering a wide range of direct drive, alternator drive, Diesel drive and stand alone electrical units for panel vans, box body vehicles and truck and trailer combinations.

Hubbard Products Ltd., is one of the UK's leading designers, manufacturers and suppliers of energy-efficient commercial cooling equipment and has earned a Global reputation for innovation and design-led excellence.

- › Cellar Cooling
- › Convenience and Retail Cooling
- › Multi Compressor Packs
- › Cold Room Units
- › Heat Recovery Systems
- › Transport Refrigeration
- › Low GWP, natural refrigeration systems



Made to Order



Made to Order

We build units according to customer requirements.

Our refrigeration experts are able to give the best advice, personalised to each situation.

We can provide complete solutions, entirely tailored to the customer needs.

Contact us to find the best solution for your business.



Please contact the refrigeration department at Daikin Europe
(refrigeration@bxl.daikineurope.com)
or your local refrigeration product manager.



Options

Options for ZEAS and Conveni-Pack

		Conveni-Pack	ZEAS						Multi-ZEAS			
		LRYEQ16AY	LREQ5BY1	LREQ6BY1	LREQ8BY1	LREQ10BY1	LREQ12BY1	LREQ15BY1	LREQ20BY1	LREQ15BY1Rx2	LREQ20BY1Rx2	
SEE NEXT PAGE	Digital pressure gauge kit	BHGP26A1										
	Pressure gauge kit	-	KHGP26B140									
	(a+b+c+d) kit	KPS26C504	KPS26C160		KPS26C280			KPS26C504				
	a. Air outlet	KPS26C504T	KPS26C160T		KPS26C280T			KPS26C504T				
	Snowbreak hood*	b. Air inlet (left)	KPS26C504L	KPS26C504L								
	c. Air inlet (right)	KPS26C504R	KPS26C504R									
	d. Air inlet (rear)	KPS26C504B	KPS26C160B	KPS26C280B			KPS26C504B					
SEE NEXT PAGE	Central drain pan kit	KWC26C450**	KWC26C160	KPS26C280			KPS26C450		KPS26C450*** x2			
	Modbus communication kit	BRR9A1V1								BRR9A1V1****		
	Booster unit	LCBKQ3AV19								-		
	Suction branch pipe for multi	-	-						EKHRQZM*****			
	Refnet header	KHRQM22M29H8										
		KHRQ22M64H8										
		KHRQM22M75H8										
		KHRQ22M20TA8										
	Refnet joint	KHRQ22M29T9										
		KHRQ22M64T8										
		KHRQ22M75T8										
		DSC601C51	-									
		DCM601A51	-									

* Snowbreak hoods are field-supplied. For technical drawings and more information, contact your dealer. It is recommended to install a snowbreak hood when regular snowfall occurs.

** In cold areas, provide a drain pan heater (field supply) to prevent drained water from freezing up in the drain pan *** required for each module


**** software update required (to be executed during commissioning) ***** mandatory

Digital pressure gauge kit

BHGP26A1

The digital measurement display allows you to diagnose a unit at a glance and it can be used with all ZEAS units and Conveni-Pack systems.

- › Digital measurement display for fixed installation or service applications.
- › Displays high and low pressure.
- › Displays error codes in the event of a fault.
- › Displays up to 32 operating parameters.
- › Displays error code history (last three).
- › Scrolls and stores output values.
- › Automatically returns to normal operating display mode.

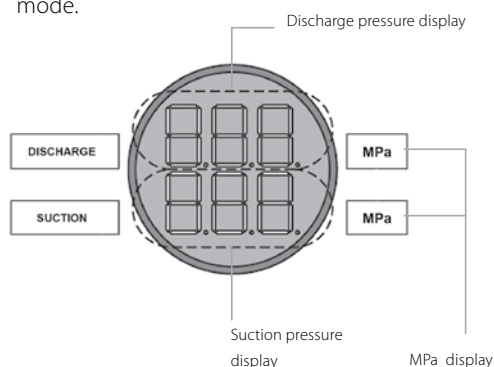

Modbus communication kit

BRR9A1V1

The Daikin Modbus Communication Interface lets you fully integrate Daikin ZEAS and Daikin Conveni-Pack systems with building control automation networks and other monitoring systems.

The interface allows you to read all the operational parameters and control important values using the Modbus protocol. This unifying component transforms ZEAS and Conveni-Pack into a transparent, customisable refrigeration unit and means that you can create object-specific and energy-optimised shop concepts, including remote monitoring application.

Pro interfaces can be used to connect up to 32 ZEAS units, and are also suitable for use with Conveni-Pack systems and the Booster.

Control values

- › Target evaporation temperature
- › Low pressure level for on and off points
- › Forced stop
- › Error messages can be cancelled remotely



Display values

- › Model information and operating status
- › Refrigerant operating pressure and temperatures
- › Electrical operating data and temperatures for components
- › Target values
- › Fan stage and compressor frequency, operating hours
- › Warning and error messages as well as system safety functions

Options

Zanotti Uniblock

			GM	SB	AS		
					Standard	Transport coldroom	Container
Options which need to be ordered with the unit	Winter kit 1: Condenser fan pressure switch + Crankcase heater + Double defrost solenoid valve	PRS VNT + RES CAR + SOL SBR	•	•			
	Winter kit 2: Condenser fan speed regulator with temperature control+ Double defrost solenoid valve	VVE TER + RES CAR + SOL SBR	•	• (Std on 235)	•	Std on 135	Std on 121, 123, 221, 135
	Winter kit 3: Condenser fan speed regulator with pressure control + Crankcase heater + Double defrost solenoid valve	VVE PRS + RES CAR + SOL SBR	•	•	Std	Std on 235, 335, 340	Std on 235, 335, 340
	Winter kit 4: BEST COP condenser fan speed regulator + Crankcase heater + Double defrost solenoid valve	VVEBCO + RES CAR + SOL SBR	•	•	•	•	•
	Simple low noise housing	INS SEM	•				
	Evaporator cataphoresis treatment	FRS EVP	•	•	•	•	•
	Condensor cataphoresis treatment	FRS CND	•	•	•	•	•
	Zanotti remote control panel with 5 m cable	PAN SNG	•				
	Watercooled condenser	CON ACQ	•	•	•	•	•
	Voltage monitor	MON TEN	•	•	•	•	•
	Phase sequence control	CTR FAS				Only for scroll	
	3 m cable for door heater (for MT only, standard for LT)	RES POR	•	•	•	•	•
	Remote control panel for 2-3-4 units	PAN MUL	•		•		Only for 235, 335, 340
	Audible and visual alarm	ALR SNV	•		•		Only for 235, 335, 340
	Prearrangement for supervising system	KIT SUP	•	•	•	•	•
	Kit long distance (more than 10 meters)	KIT DIS	•				
Option where afterwards installation is possible	Kit for through wall construction	KIT PAN	•	Std	Std	Std	Std

Zanotti Bi-block

			GS	SPO	DBO
Options which need to be ordered with the unit	Simple low noise housing	FRS CND	•		
	Condensate drain electrical heater	RES SCC	X (Std LT)	X (Std LT)	X (Std LT)
	Evaporator cataphoresis treatment	FRS EVP	•	•	•
	Condensor cataphoresis treatment	FRS CND	•	•	•
	Water-cooled condenser	CON ACQ	•	•	•
	Voltage monitor	MON TEN	•	•	•
	3 m micro-switch door cable	MIC POR	•	•	•
	1 m cold room lightning cable	CAV LCE			•
	3 m cable for door heater	RES POR	•	•	•
	Remote control panel for 2-3-4 units	PAN MUL	•	•	•
	Audible and visual alarm	ALR SNV	•	•	•
	Prearrangement for supervising system	KIT SUP	•	•	•
	Kit long distance (more than 10 meters)	KIT DIS	•		
	cold room lamp	KIT LCE	•	•	•

Zanotti Wineblock

			RCV	RDV
Options (Mandatory to be ordered with the unit)	Winter kit 1: Condenser fan pressure switch + Crankcase heater	PRS VNT + RES CAR	•	
	Winter kit 3: Condenser fan speed regulator with pressure control + Crankcase heater	VVE PRS + RES CAR	•	•
	Winterkit 4: BEST COP condenser fan speed regulator + Crankcase heater	VVEBCO + RES CAR	•	•
	Evaporator cataphoresis treatment	FRS EVP	•	•
	Condensor cataphoresis treatment	FRS CND	•	•
	Watercooled condenser	CON ACQ	•	•
	Voltage monitor	MON TEN	•	•
Options (Installation afterwards possible)	Prearrangement for supervising system	KIT SUP	•	•

Zanotti condensing units

		Condensing unit for outdoor installation		Twin condensing unit for outdoor installation with twin-semi hermetic compressors
		with hermetic compressors	with semi hermetic compressors	
RES CAR	Crankcase heater	•	•	•
PRO TRM	Thermal overload protection	•	•	•
VVE BCO	BESTCOP Condenser fan speed controller	•	•	•
VVE PRS	Pressure condenser fan speed controller	•	•	•
VVE TER	Temperature condenser fan speed controller	•	•	•
PRS LPF	LP switch (fixed calibration)	•	•	•
SEP ASP	Suction liquid separator	•	•	•
SEP OIL	Oil separator	•	•	•
VEN RAD	Radial type condenser fans	•	•	•
REG POT	Compressors capacity controller	•	•	•
SOL LIQ	Liquid line solenoid valve	•	•	•
CON ACQ	Watercooled condensation	•	•	•
VL T DIF	Different voltage	•		
FRS CND	Anti-corrosion protection on condenser coil	•	•	•
FRS EVP	Anti-corrosion protection on evaporator coil	•	•	•
IMB FUM	Fumigation according to ISPM15	•	•	•
PRS VNT	Condenser fan pressure switch	•	•	•
PRS HPR	HP switch with auto reset	•	•	•
MON TEN	Voltage monitor	•	•	•
INS SEM	Simple low noise housing	•	•	•
INS DOP	Enhanced low noise housing	•	•	•
QUA ELE	Power control box with magneto thermic switches	•	•	•
RES CAR	Crankcase heater	•	•	•
FQD	Frequency driver		•	•

		Multi compressor condensing unit	
		with scroll/digital scroll compressors	with semi hermetic compressors
INSRD	Closed frame with double layer sound proofing material	•	•
AC&R	Mechanical oil equalization system with oil reserve, oil line filter, pressure reduction valve onto oil reserve	•	•
TRAXOIL	Electronic oil distribution system	•	•
RIC.LIQ.	Oversized liquid receiver	•	•
CFF	Compressors sound shell	•	•
ELC.C	Electronic card EWCM4180 - XC1000D - EWCM9100	•	•





Ice bar



Cabinet cooling



Supermarket



Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



KEEP COOL, SAVE MONEY

Daikin refrigeration products are designed to reduce environmental impact. That's why Daikin ZEAS and Conveni-Pack already comply with the latest F-gas regulation. This secures your investments and enables you to plan ahead for long-term projects, already complying with all the regulations.



Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)

FSC

ECPEN18-800_1

06/18



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.